


Data Sheet | Item Number: 857-400


Isolation amplifier; Current and voltage input signal; Current and voltage output signal; Zero/span adjustment; Configuration via DIP switch; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²



<https://www.wago.com/857-400>

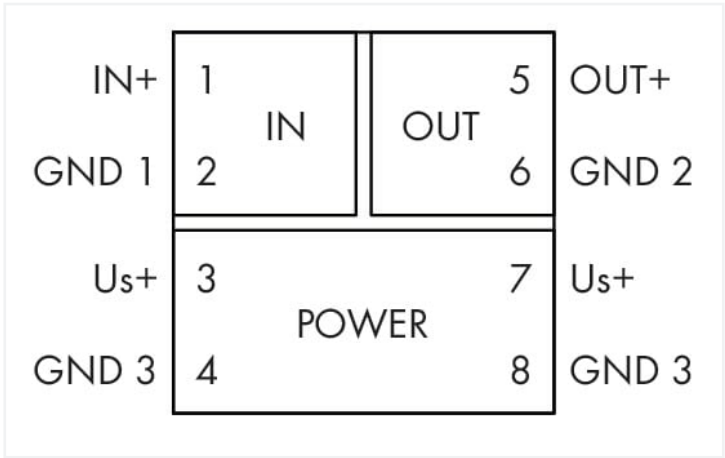

857-400									
DIP Switch Adjustability									
DIP Switch S1 (2-40)					DIP Switch S2 (5-10)				
Input Signal					Output Signal				
1	2	3	4	5	6	7	8	9	10
0...20 mA					0...20 mA				1 kHz
					4...20 mA				100 Hz
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				
4...20 mA					0...20 mA				
					4...20 mA				
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				
0...10 V					0...20 mA				
					4...20 mA				
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				
2...10 V					0...20 mA				
					4...20 mA				
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				
0...5 V					0...20 mA				
					4...20 mA				
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				
1...5 V					0...20 mA				
					4...20 mA				
					0...10 V				
					2...10 V				
					0...5 V				
					1...5 V				

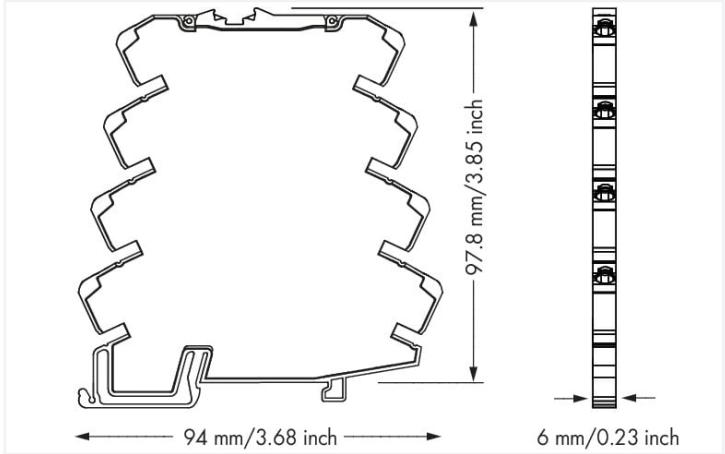

Short description:

WAGO's configurable signal conditioner converts, amplifies, filters and electrically isolates standard analog signals.

Features:

- Zero/span adjustment across the entire measurement range
- Calibrated measurement range switching
- Switchable limit frequency

Notes

Safety information Input and output must be safely isolated from any hazardous live parts!

Note The 3 (Us+), 7 (Us+), 4 (GND 3) and 8 (GND 3) connections are internally commoned. Current carrying capacity between 3/4 and 7/8 connections: 1 A (max.)

Use shielded signal lines! Only use shielded signal lines for analog input and output signals. Only then can you ensure that the accuracy and interference immunity specified for the device can be achieved, even in the presence of interference acting on the signal cable.



Technical data

Configuration		Input	
Configuration options	DIP switch Potentiometer	Input signal type	Voltage Current
		Input signal (voltage)	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (calibrated switching)
		Input signal (current)	0 ... 20 mA; 4 ... 20 mA (calibrated switching)
		Input resistance (current input)	≤ 50 Ω
		Input resistance (voltage input)	≥ 100 kΩ
		Input current (max.)	50 mA
		Input voltage (max.)	30 V
		Zero/span adjustment	± 3% of upper-range value

Output (analog)		Signal processing	
Output signal type	Current Voltage	Limit frequency	100 Hz / 5 kHz (configurable via DIP switch)
Output signal (voltage)	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (calibrated switching)	Step response (typ.)	3.5 ms (100 Hz); 100 μs (5 kHz)
Output signal (current)	0 ... 20 mA; 4 ... 20 mA; 0 ... 10 mA; 2 ... 10 mA (calibrated switching)		
Load impedance (voltage output)	≥ 2 kΩ		
Load impedance (current output)	≤ 600 Ω		

Measurement error		Power supply	
Transmission error (typ.)	≤ 0.1 % of upper-range value	Power supply type	24 VDC (SELV)
Transmission error (max.)	≤ 0.2 % of upper-range value	Nominal supply voltage U _S	DC 24 V
Transmission error (under interference)	≤ 15 % of upper-range value	Supply voltage range	±30 %
Temperature coefficient	≤ 0.01 %/K	Current consumption at nominal supply voltage	≤ 25 mA
		Current consumption (default)	≤ 30 mA
		Current consumption (max.)	≤ 40 mA (2 x I _{out} 20 mA; Bürde: 600 Ω; U _{S+} : 9,6 V)

Safety and protection

Protection type	IP20	Test voltage	
		Test voltage (input/output/supply)	AC 2.5 kV; 50 Hz; 1 min

Insulation coordination	
Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply)	Functional insulation
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)

Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0.418 MJ
Weight	36.8 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 10 \text{ K})$
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2
EMC emission of interference	EN 61000-6-4
Standards/specifications	DNV UL 508

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-21-01-20
eCl@ss 9.0	27-21-01-20
ETIM 8.0	EC002653
ETIM 7.0	EC002653
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4045454471293
Customs tariff number	85437090300



Approvals for hazardous areas		
UL	ANSI/ISA 12.12.01	E198726
Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)		

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 857-400	↓

Documentation

Manual	
WAGO Isolating Ampli- fiers	↓

Bid Text			
857-400	18.07.2019	xml 6.10 KB	↓
857-400	18.07.2019	docx 19.31 KB	↓
857-400	18.07.2019	pdf 75.55 KB	↓

Instruction Leaflet			
CCC Ex (Additional in- formation)	26.04.2023	pdf 140.99 KB	↓
Messumformer und Trennverstärker	V 2.0.0 16.08.2022	pdf 2246.01 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 857-400	↓

CAE data	
EPLAN Data Portal 857-400	↓
WSCAD Universe 857-400	↓
ZUKEN Portal 857-400	↓



1 Compatible Products				
1.1 Optional Accessories				
1.1.1 Installation				
1.1.1.1 Mounting accessories				
				
Item No.: 249-117 Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	Item No.: 249-197 Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	Item No.: 249-116 Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray		
1.1.2 Interface module				
1.1.2.1 Interface adapters				
				
Item No.: 857-980 Interface adapter; 16-pole; analog				
1.1.3 Jumper				
1.1.3.1 Jumper				
				
Item No.: 281-482 Jumper; 2-way; insulated; gray	Item No.: 859-410/000-006 Jumper; for jumper slot; 10-way; insulated; blue	Item No.: 859-410 Jumper; for jumper slot; 10-way; insulated; light gray	Item No.: 859-410/000-005 Jumper; for jumper slot; 10-way; insulated; red	
				
Item No.: 859-410/000-029 Jumper; for jumper slot; 10-way; insulated; yellow	Item No.: 859-402/000-006 Jumper; for jumper slot; 2-way; insulated; blue	Item No.: 859-402 Jumper; for jumper slot; 2-way; insulated; light gray	Item No.: 859-402/000-005 Jumper; for jumper slot; 2-way; insulated; red	
				
Item No.: 859-402/000-029 Jumper; for jumper slot; 2-way; insulated; yellow	Item No.: 859-403/000-006 Jumper; for jumper slot; 3-way; insulated; blue	Item No.: 859-403 Jumper; for jumper slot; 3-way; insulated; light gray	Item No.: 859-403/000-005 Jumper; for jumper slot; 3-way; insulated; red	
				
Item No.: 859-403/000-029 Jumper; for jumper slot; 3-way; insulated; yellow	Item No.: 859-404/000-006 Jumper; for jumper slot; 4-way; insulated; blue	Item No.: 859-404 Jumper; for jumper slot; 4-way; insulated; light gray	Item No.: 859-404/000-005 Jumper; for jumper slot; 4-way; insulated; red	
				
Item No.: 859-404/000-029 Jumper; for jumper slot; 4-way; insulated; yellow	Item No.: 859-405/000-006 Jumper; for jumper slot; 5-way; insulated; blue	Item No.: 859-405 Jumper; for jumper slot; 5-way; insulated; light gray	Item No.: 859-405/000-005 Jumper; for jumper slot; 5-way; insulated; red	
				
Item No.: 859-405/000-029 Jumper; for jumper slot; 5-way; insulated; yellow	Item No.: 859-406/000-006 Jumper; for jumper slot; 6-way; insulated; blue	Item No.: 859-406 Jumper; for jumper slot; 6-way; insulated; light gray	Item No.: 859-406/000-005 Jumper; for jumper slot; 6-way; insulated; red	
				
Item No.: 859-406/000-029 Jumper; for jumper slot; 6-way; insulated; signal yellow	Item No.: 859-407/000-006 Jumper; for jumper slot; 7-way; insulated; blue	Item No.: 859-407 Jumper; for jumper slot; 7-way; insulated; light gray	Item No.: 859-407/000-005 Jumper; for jumper slot; 7-way; insulated; red	



1.1.3.1 Jumper



Item No.: 859-407/000-029
Jumper; for jumper slot; 7-way; insulated; yellow

Item No.: 859-408/000-006
Jumper; for jumper slot; 8-way; insulated; blue

Item No.: 859-408
Jumper; for jumper slot; 8-way; insulated; light gray

Item No.: 859-408/000-005
Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029
Jumper; for jumper slot; 8-way; insulated; yellow

Item No.: 859-409/000-006
Jumper; for jumper slot; 9-way; insulated; blue

Item No.: 859-409
Jumper; for jumper slot; 9-way; insulated; blue

Item No.: 859-409/000-005
Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029
Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 793-502
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-566
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-503
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-504
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-505
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-506
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.4.2 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.5 Power supply

1.1.5.1 Power supply unit



Item No.: 787-2852
Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current

1.1.6 Terminal blocks

1.1.6.1 Supply module



Item No.: 857-979
Supply and through module

1.1.6.2 Through terminal block



Item No.: 857-979
Supply and through module

1.1.7 Tool


1.1.7.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Configuring



Configuration via DIP switch

Commoning



Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.