



Fuse switch disconnecter 3-pole selectable, for protection of transformers on the secondary side up to 630 kVA for LV HRC fuses GTR 910 A max., 400 V AC, and NH3 disconnecting blade up to 1250 A

Model	
product brand name	SENTRON
product designation	Fuse switch disconnectors
design of the product	in in-line design
type of switching contact double breaking switching contact	No
design of the auxiliary release	Without
design of the safety monitoring	Without
design of the load switch strip form	Yes
General technical data	
number of poles	3
number of poles note	3-pole switchable
type of device	For busbar system 185 mm
size of fuse link	NH3
fuse system	LV HRC fuse
Voltage	
insulation voltage rated value	500 V
operational current	
• at AC-21 B at 400 V rated value	910 A
• at AC-21 B at 500 V rated value	910 A
• at AC-21 B at 690 V rated value	910 A
• at AC-23 B at 400 V rated value	910 A
operating voltage	
• at AC rated value	400 V
Protection class	
protection class IP on the front	IP30
Dissipation	
power loss [W]	
• for rated value of the current at AC in hot operating state per pole	86.6 W
• maximum	260 W
Main circuit	
operational current	
• rated value	910 A
• with capacitive load at 400 V rated value	500 A
• with capacitive load at 500 V rated value	380 A
Suitability	
suitability for operation	Transformer protection
suitability for use	
• main switch	No
• switch disconnecter	Yes

• EMERGENCY OFF switch	No
• safety switch	No
• maintenance/repair switch	No
Product details	
product component	
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
Short circuit	
conditional short-circuit current (I_q)	
• at AC-21 B at 400 V rated value	50 kA
• at AC-21 B at 500 V rated value	50 kA
• at AC-21 B at 690 V rated value	50 kA
• at AC-22 B at 400 V rated value	50 kA
• at AC-22 B at 500 V rated value	50 kA
• at AC-22 B at 690 V rated value	50 kA
• at AC-23 B at 400 V rated value	50 kA
• at AC-23 B at 500 V rated value	50 kA
• at AC-23 B at 690 V rated value	50 kA
Connections	
arrangement of electrical connectors for main current circuit	Flat terminal
type of electrical connection for main current circuit	busbar connection
Mechanical Design	
height	662 mm
width	100 mm
depth	195 mm
fastening method	Flachanschluss, 2 x M 12
mounting position	vertical
busbar center-to-center spacing	185 mm
busbar center-to-center spacing	
• 40 mm	No
• 50 mm	No
• 60 mm	No
• 100 mm	No
• 185 mm	Yes
net weight	12.94 kg
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
Approvals Certificates	
General Product Approval	other



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

Environment

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NJ4183-3BF01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NJ4183-3BF01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NJ4183-3BF01

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

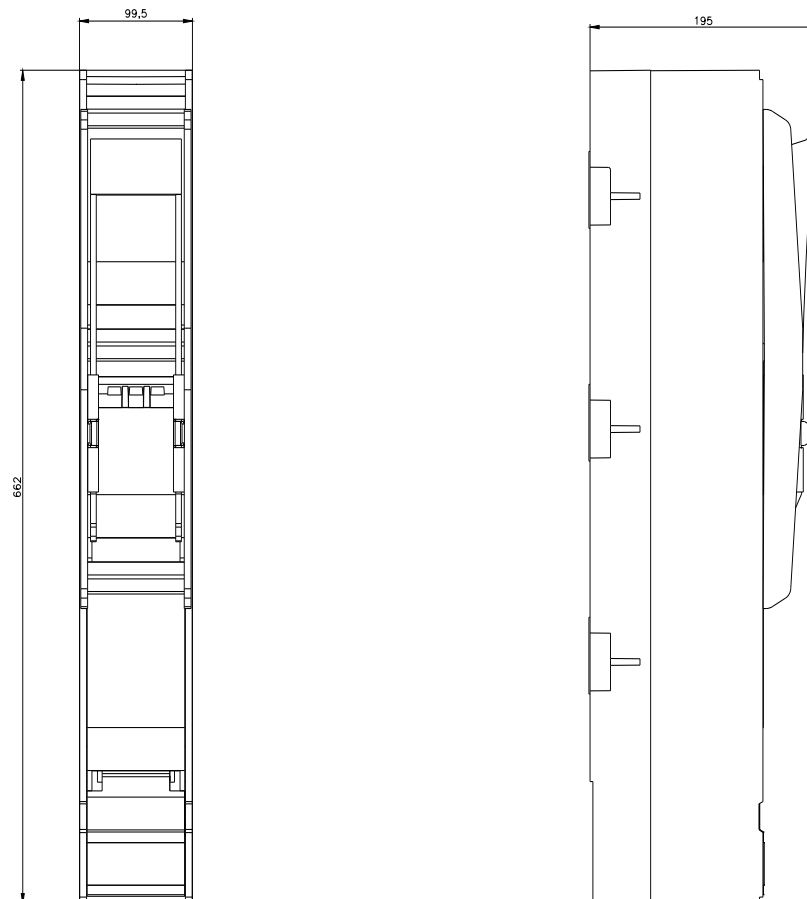

last modified:

5/3/2023 

