

1264 - Vega LED

Code: 420669-00



The Vega wall sconce, one of Disano's most popular wall lamps, combines excellent material quality and distinctive design with LED technology, which guarantees energy savings and long life. The unique shape of its housing allows for simple and functional installations. Also available with presence sensor to enhance functionality and service life.



GENERAL INFORMATION

|         |                 |
|---------|-----------------|
| Article | 1264 - Vega LED |
| Code    | 420669-00       |

DIMENSIONS AND WEIGHT

|             |          |
|-------------|----------|
| Length (mm) | 300 mm   |
| Width (mm)  | 225 mm   |
| Height (mm) | 142 mm   |
| Weight (Kg) | 1.440 kg |


ELECTRICAL CHARACTERISTICS AND CONTROLS

|                    |         |
|--------------------|---------|
| Voltage type       | AC      |
| Min Voltage (V)    | 220 V   |
| Max Voltage (V)    | 240 V   |
| Min Frequency (Hz) | 50 Hz   |
| Max Frequency (Hz) | 60 Hz   |
| Frequency (Hz)     | 50 Hz   |
| Wiring name        | CLD     |
| Power factor       | ≥0.9    |
| Insulation class   | Class I |
| Controllability    | None    |

1264 - Vega LED

Code: 420669-00

PHOTOMETRIC DATA

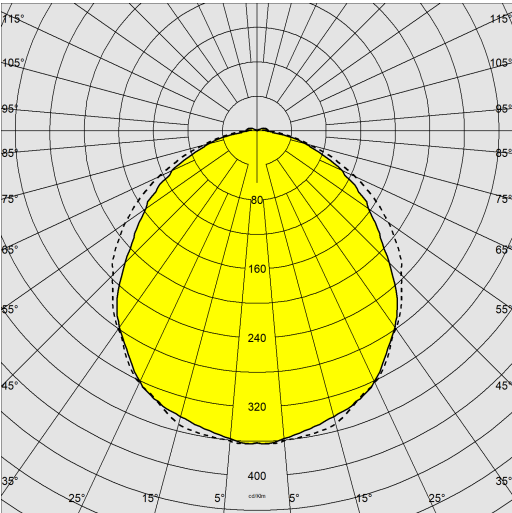

|                              |                      |
|------------------------------|----------------------|
| Lighting source              | LED                  |
| CRI                          | 70                   |
| Luminous flux (output) (lm)  | 3560 lm              |
| Power absorption (total) (W) | 25 W                 |
| CCT                          | 4000 K               |
| Luminous efficacy (lm/W)     | 142 lm/W             |
| LED flux maintenance         | 50000 hr, L 70, B 50 |

MECHANICAL CHARACTERISTICS


|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK08 |
| IP                            | 65   |



1264 - Vega LED


Code: 420669-00

MATERIALS AND COLOURS

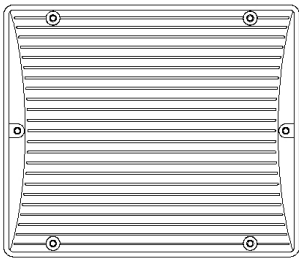

225

300



142

DOWNLOAD

MOUNTS

AssemblyInstructions 1264 03-23.pdf

DESIGNS

BIM 1264 Vega - 20200623.zip

TechnicalDrawing 1264.dxf



|                 |                                                                                                                                                                                       |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing         | thermoplastic material, shatterproof, UV stabilised, RAL7045 grey colour.                                                                                                             |
| Optics          | anodised and polished 99.85 aluminium.                                                                                                                                                |
| Diffuser        | in anti-glare matt polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing, externally smooth and dustproof.                                             |
| Pole connection | 0                                                                                                                                                                                     |
| Colour          | Black                                                                                                                                                                                 |
| Equipment       | <ul style="list-style-type: none"><li>- complete with fixing plate.</li><li>- EPDM foam bowl gasket.</li><li>- external screws in galvanised stainless steel with black OR.</li></ul> |

STANDARDS AND COMPLIANCE

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Photobiological safety class | RG0                                                        |
| Markings and tests           | CE                                                         |
| Reference standards          | EN60598-1. With degree of protection according to EN60529. |
| Energy Label                 | C                                                          |

GEAR

|              |   |
|--------------|---|
| Upon request | 0 |
|--------------|---|

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|

1264 - Vega LED

Code: 420669-00



1266 Joint



995140-00



995141-00



995142-00



995143-00

Self-adhesive pictograms - 1260



5 Fibreglass pole