


1823 - Miniquadro

Code: 530425-00



Accent lighting emphasises details and adds a third dimension to objects.
Works well in both classic and modern styles producing the same effect.
MiniQuadro: the family is completed by the modularity and aesthetic continuity with Quadro
Stainless steel frame, complete with outer shell for recessed installation with wiring separate from the lamp compartment to reduce temperatures.

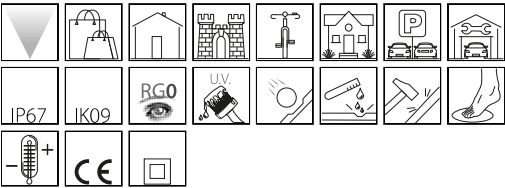

GENERAL INFORMATION

Article	1823 - Miniquadro
Code	530425-00

DIMENSIONS AND WEIGHT

Length (mm)	162 mm
Width (mm)	162 mm
Height (mm)	180 mm
Weight (Kg)	1.638 kg

INSTALLATION

Recessed dimensions - Length (mm)	162 mm
Recessed dimensions - Width (mm)	162 mm


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Wiring	Separate wiring to reduce the thermal impact on components and simplify installation.
Power factor	≥0.9
Insulation class	Class II
Controllability	None

1823 - Miniquadro

Code: 530425-00

PHOTOMETRIC DATA

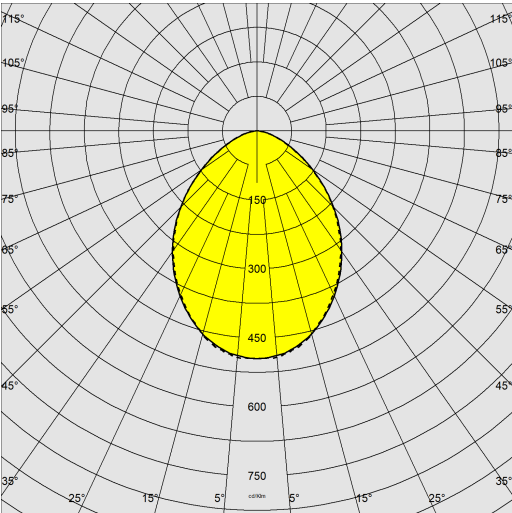

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1540 lm
Power absorption (total) (W)	11 W
CCT	4000 K
Luminous efficacy (lm/W)	140 lm/W
LED flux maintenance	50000 hr, L 80, B 20


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK09
Max load	2000 kg
Walkover	True
Driveover	True
IP	67

1823 - Miniquadro

Code: 530425-00

MATERIALS AND COLOURS

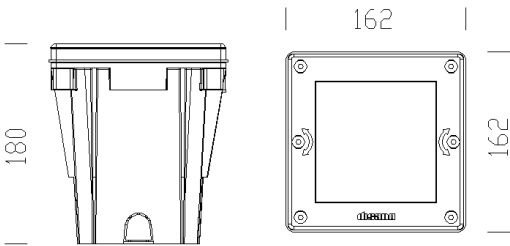

Housing	in black nylon. Frame in AISI 304 stainless steel. With outer shell in nylon.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 12 mm thick, resistant to thermal shock, impact and static loads.
Colour	Stainless steel
Equipment	silicone rubber gaskets. with power supply unit with constant current A= 350mA.
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 40KN equal to 2000 kg.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

AssemblyInstructions miniquadro 04-23.pdf

DESIGNS

TechnicalDrawing 1820.dxf

