

Actuator head for position switch 3SE51/52 Angular roller lever Stainless steel lever with Stainless steel roller 13 mm



|                                                          |                                                                       |
|----------------------------------------------------------|-----------------------------------------------------------------------|
| product brand name                                       | SIRIUS                                                                |
| product designation                                      | actuator head for position switch                                     |
| product type designation                                 | 3SE5                                                                  |
| manufacturer's article number                            |                                                                       |
| • of the supplied actuator head for position switches    | <a href="#">3SE5000-0AF13</a>                                         |
| General technical data                                   |                                                                       |
| product function positive opening                        | Yes                                                                   |
| shock resistance                                         |                                                                       |
| • according to IEC 60068-2-27                            | 30g / 11 ms                                                           |
| mechanical service life (operating cycles) typical       | 15 000 000                                                            |
| material of the enclosure of the switch head             | plastic                                                               |
| reference code according to IEC 81346-2                  | T                                                                     |
| active principle                                         | mechanical                                                            |
| Substance Prohibitance (Date)                            | 07/01/2006                                                            |
| minimum actuating force in directions of actuation       | 10 N                                                                  |
| Ambient conditions                                       |                                                                       |
| ambient temperature                                      |                                                                       |
| • during operation                                       | -25 ... +85 °C                                                        |
| • during storage                                         | -40 ... +90 °C                                                        |
| explosion protection category for dust                   | none                                                                  |
| Enclosure                                                |                                                                       |
| coating of the enclosure                                 | Other types                                                           |
| Drive Head                                               |                                                                       |
| design of the actuating element                          | Angular roller lever, high-grade steel lever, high-grade steel roller |
| standard-compliant actuator head                         | EN 50047                                                              |
| shape of the switch head                                 | roller                                                                |
| outer diameter of the switch head                        | 13 mm                                                                 |
| Installation/ mounting/ dimensions                       |                                                                       |
| mounting position                                        | any                                                                   |
| fastening method                                         | lockable plug-in fixing                                               |
| design of the interface for safety-related communication | without                                                               |
| Communication/ Protocol                                  |                                                                       |
| design of the interface                                  | without                                                               |
| Approvals Certificates                                   |                                                                       |
| General Product Approval                                 |                                                                       |



[Confirmation](#)



EG-Konf.



UR





#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0AF13>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0AF13>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0AF13>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE5000-0AF13&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0AF13&lang=en)

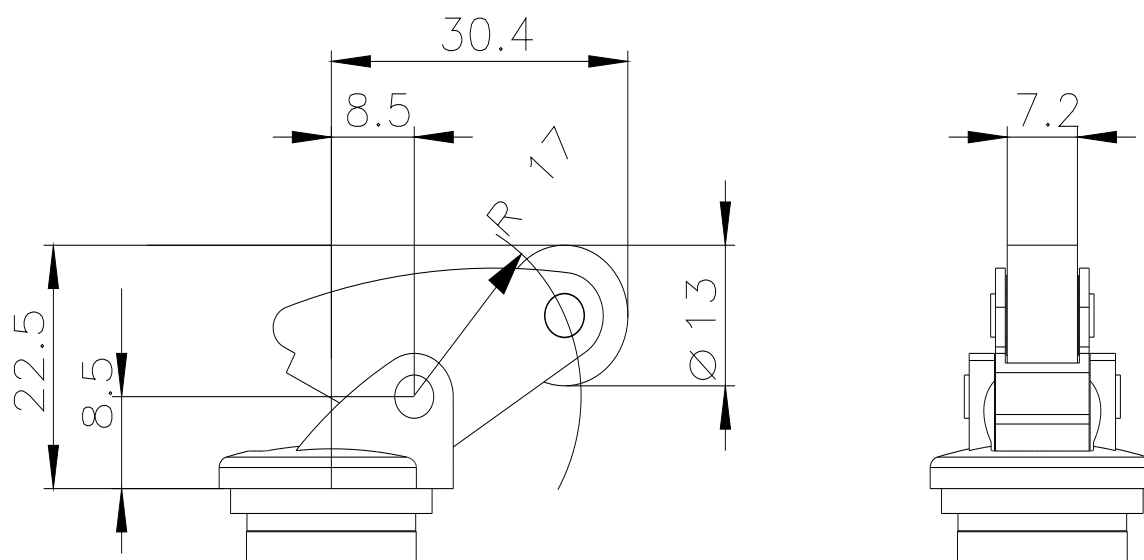

last modified:

12/21/2020