



auxiliary switch 1 CO for cylindrical fuse base Sz. 14 x 51 mm for monitoring of blown-fuse status of striker-fuses

Model			
product brand name	SETRON		
product designation	auxiliary switches		
design of the product	striker fuses		
design of the product factory mounted	No		
Supply voltage			
operating voltage	250 V		
• rated value			
Breaking Capacity			
switching capacity current rated value	5 A		
Control current			
type of voltage of control voltage	AC		
Product details			
number of fault signal contacts	0		
number of NC contacts	0		
number of NO contacts	0		
number of CO contacts	1		
product extension can be mounted	others		
product extension	Auxiliary current switch		
Mechanical Design			
height	83 mm		
width	9 mm		
depth	64 mm		
number of modular width units	1		
net weight	52 g		
Approvals Certificates			
General Product Approval		Test Certificates	other



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

other	Environment
Miscellaneous	Environmental Con- firmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7901>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NW7901>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7901

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

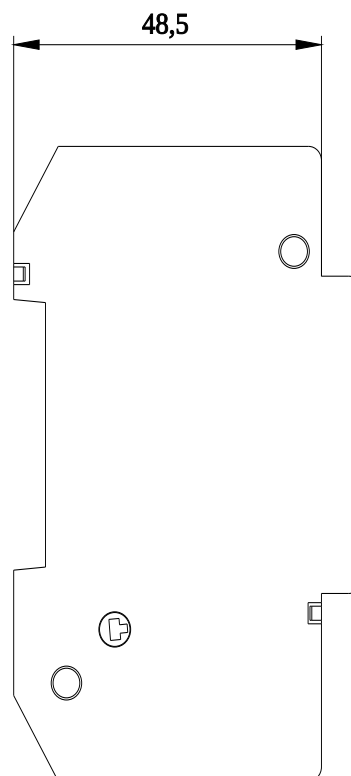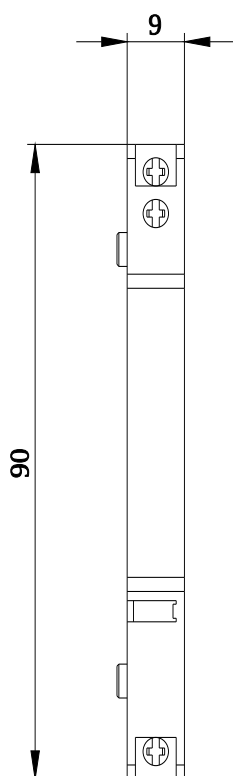

22 14

13/21

last modified:

10/11/2023 

