



Switch disconnecter with fuse 3KF SITOR, 63 A, Size 1, 3-pole, for LV HRC fuse Sz. 000 for semiconductor protection Front operating mechanism left, basic unit without handle, box terminal without fuses

Model	
product brand name	SETRON
product designation	3KF switch disconnecter with fuses
design of the product	3KF switch disconnecter with fuses
product variations	3KF SITOR
design of the actuating element	without
design of handle	Without
direction of actuation	from the front
type of the driving mechanism motor drive	No
number of poles	3
size of disconnecting link	00 and 000
size of switch disconnecter	1
size of fuse link	NH000, NH00
mechanical service life (operating cycles) typical	15 000
electrical endurance (operating cycles)	
• at AC-23 A at 440 V	10 000
• at AC-23 A at 690 V	6 000
• at DC-23 A at 440 V	1 500
I ² t value	
• with closed switch for combination switch + fuse at 500 V maximum	33 200 A ² ·s
• with closed switch for combination switch + fuse at 400 V maximum	33 200 A ² ·s
• with closed switch at 690 V for combination switch + gG fuse maximum	40 700 A ² ·s
• of the fuse at 500 V maximum permissible	34 000 A ² ·s
• of the gG fuse at 690 V maximum permissible	55 000 A ² ·s
• of the aM fuse at 690 V maximum permissible	55 000 A ² ·s
position of the switch operating mechanism	left
fuse system	LV HRC fuse
overvoltage category	IV
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 / 3
• with degree of pollution 3 at DC rated value	440 / 3
surge voltage resistance rated value	12 kV
Supply voltage	
operating voltage at AC rated value maximum	690 V
Protection class	
protection class IP	IP00
protection class IP	
• with closed switch with cover or cable lug cover	IP00

• on the front	IP00
Dissipation	
power loss [W]	
• with conventional rated thermal current per pole	1.7 W
• with conventional rated thermal current per device	5.1 W
• with conventional rated thermal current without fuse per pole	1.7 W
• with conventional rated thermal current without fuse per device	5.1 W
• for rated value of the current at AC in hot operating state per pole	1.7 W
• of the fuse per fuse maximum	8 W
Main circuit	
operating power at AC-23 A at 500 V rated value	37 kW
operational current rated value	63 A
Auxiliary circuit	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	0
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	4
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
suitability for use	
• main switch	Yes
• switch disconnecter	Yes
• EMERGENCY OFF switch	Yes
• safety switch	Yes
• maintenance/repair switch	Yes
product component	
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
product feature sealable	No
product extension auxiliary switch	Yes
product extension optional	
• locking capability	Yes
• motor drive	No
• fuse monitoring	Yes
product function	
• fuse monitoring	No
• overvoltage protection monitoring	No
Short circuit	
short-circuit current making capacity (I _{cm}) for switch disconnecter at 690 V AC/440 V DC without fuse link rated value minimum	3.55 kA
conditional short-circuit current with line-side fuse protection	
• at 500 V by gG fuse rated value	100 kA
• at 690 V by gG fuse rated value	100 kA
Connections	
arrangement of electrical connectors for main current circuit	Top and bottom
tightening torque with screw-type terminals	
• minimum	5 N·m
• maximum	6.5 N·m
type of connectable conductor cross-sections with flexible busbar	2x (0.8 x 9 mm ²)
type of connectable conductor cross-sections	
• for copper busbar	1x (12 x 2 mm ²)
type of connectable conductor cross-sections for copper conductor	
• solid	1x (1 ... 16 mm ²) / 1x (AWG 14 ... 6)
• finely stranded with core end processing	1x (6 ... 25 mm ²) / 1x (AWG 12 ... 4)
• stranded	1x (6 ... 25 mm ²) / 1x (AWG 14 ... 4)

type of electrical connection for main current circuit	box terminal
Mechanical Design	
height	153 mm
width	148.3 mm
depth	132.7 mm
fastening method	Floor mounting and snap-on mounting on 35 mm standard mounting rail
fastening method	
• 4-hole front mounting	No
• front mounting with central attachment	No
• rail mounting	Yes
mounting position	any
net weight	1 250 g

Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-50 °C
• maximum	80 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	other	Environment
--------------------------	-------	-------------

[Miscellaneous](#)



[Miscellaneous](#)

[Confirmation](#)



[Environmental Con-
firmations](#)

Environment

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KF1306-0LB51>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KF1306-0LB51>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)






http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KF1306-0LB51


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

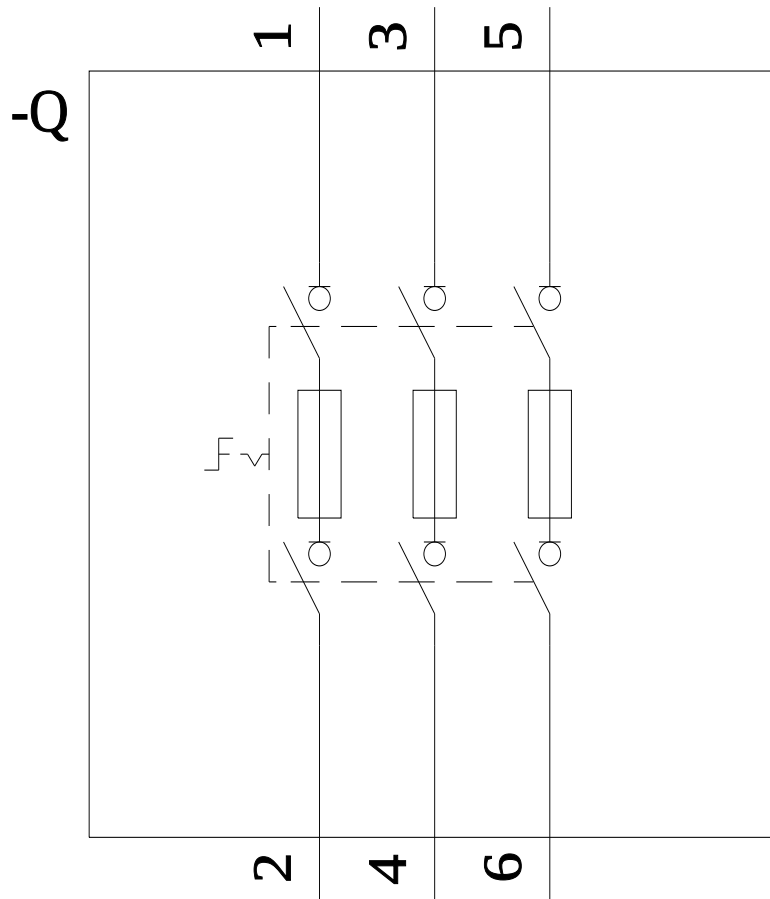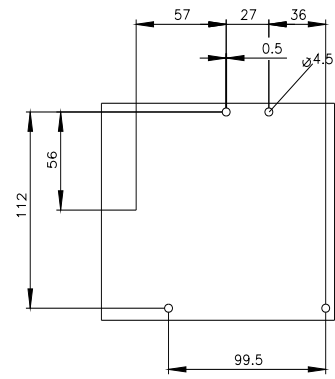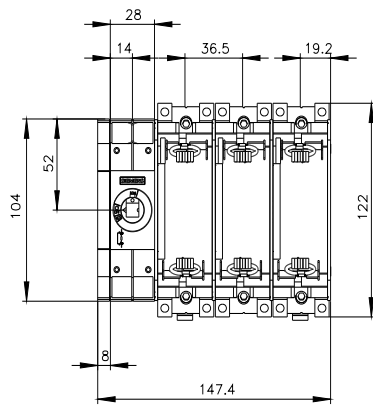

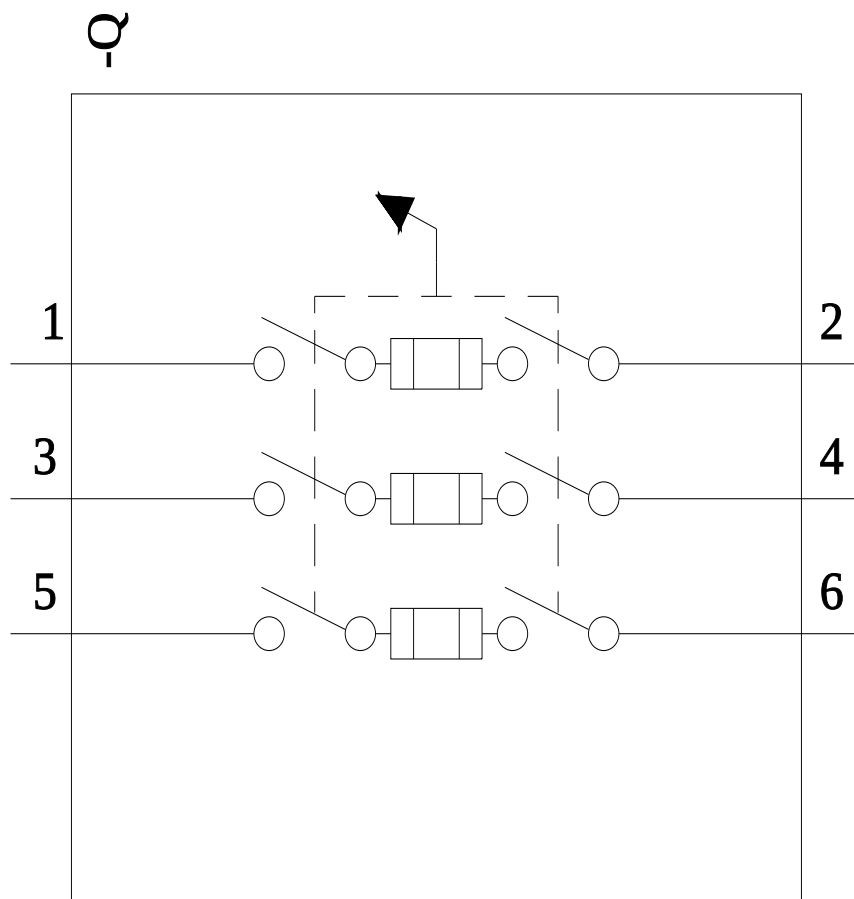

last modified:

8/2/2022 

