



Door-coupling rotary operating mechanism standard with tolerance compensation
Size 100x 100, Shaft 10x 10, 300 mm, I-0-II, Complete unit Handle size 140 mm
Accessory for 3KC0 size 4

Model	
product brand name	SETRON
product designation	Door mounted rotary operator
design of the product	standard with tolerance compensation
design of handle	Gray
design of the door lock system	Door interlocking
size of cross-section of the shaft of door-coupling rotary operating mechanism	10x10 mm
size format of the masking frame of door-coupling rotary operating mechanism	100x 100 mm
length of handle	140 mm
length of shaft of door-coupling rotary operating mechanism	300 mm
protection class IP	IP65
suitability for use	3KC0 MTSE, 3KD size 1 and 2, 3KF size 1

Product details	
product description	size 100x100 mm, shaft 8 x8 mm
product component	
• extension shaft	Yes
• handle for emergency-OFF function	No
product feature lockable	Yes
display version for switch position indicator	I-0-II

Mechanical Design	
height	144 mm
width	98 mm
depth	450 mm
net weight	910 g

Approvals Certificates		
General Product Approval	Marine / Shipping	other



[Confirmation](#)

[Miscellaneous](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8UD1151-3AE21>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8UD1151-3AE21>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8UD1151-3AE21

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

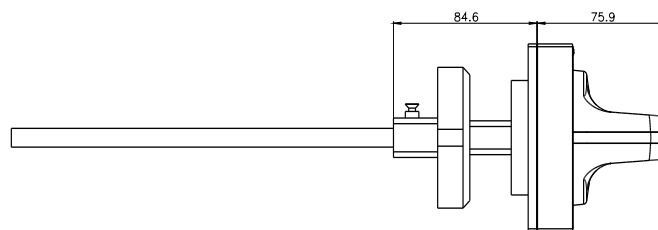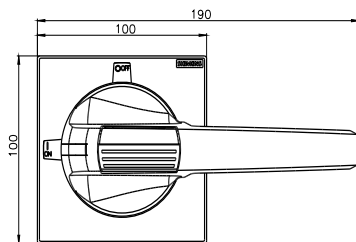

last modified:

7/29/2022 

