

Pin busbar, 10 mm² connection: 2x3x (1-phase+N) touch-safe

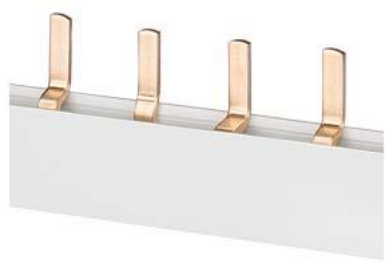


Figure similar

Model	
product brand name	SETRON
product designation	Pin busbar
design of the product	10 mm ² , 2X(3X(1PH+N))
General technical data	
phase number	1
cross-section	10 mm ²
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	12 mm
length	210 mm
net weight	83.31 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)


[Miscellaneous](#)



[Miscellaneous](#)

other	Environment
Confirmation	Environmental Con- firmations
	Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3623
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

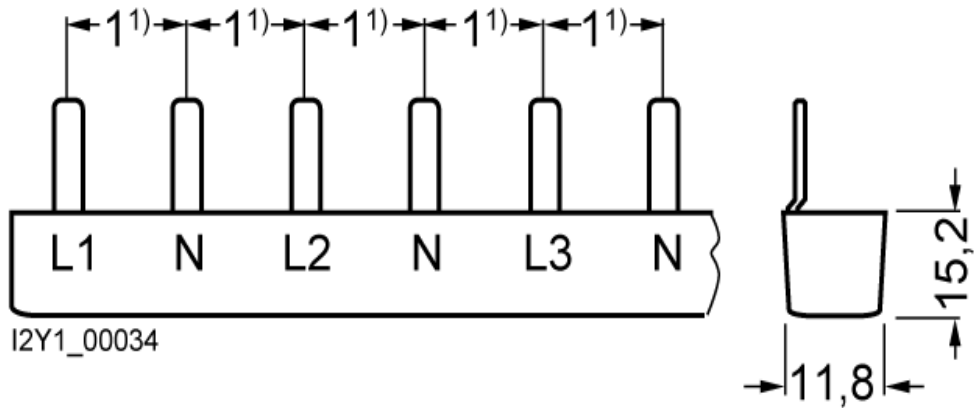

1) Pin spacings in MW (Modular widths, 1 MW = 18

