

Accessories: Connecting cable 1 m, M12 socket 8-pole at one end, and M12 plug 8-pole at the other end. For connecting safety switch with tumbler 3SE5324*, emergency stop enclosure 3SU1 with M12 plug 8-pole to e.g. SIMATIC ET200eco PN via Y cable 6ES7194-6KC00-0XA0 or for 8WD46.



General technical data

operational current at 40 °C rated value	4 A
operating voltage rated value	125 V
number of poles	8
wire length of connection cable	1 m
ambient temperature during operation	-25 ... +80 °C
connector coding of the M12 circular connector	A - Standard
type of electrical connection	connector M12
degree of pollution	3
protection class IP	IP67
material	
• of contact main body	PUR

Certificates/ approvals

General Product Approval	other
--------------------------	-------

[Confirmation](#)





[Confirmation](#)

Environment

[Environmental Conformations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SX5601-3SV18>
Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SX5601-3SV18>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3SX5601-3SV18>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SX5601-3SV18&lang=en

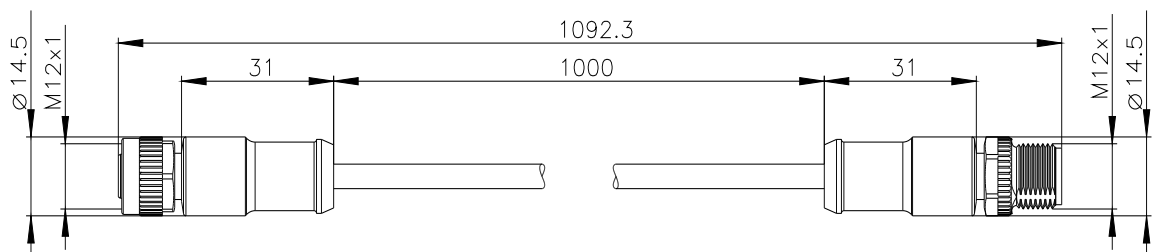

1	→	1
2	→	2
3	→	3
4	→	4
5	→	5
6	→	6
7	→	7
8	→	8

