



SETRON, Fuse switch disconnecter 3NP1, 3-pole, NH3, 630 A, for Rittal busbar system 60 mm, flat terminal, Cover level 32/70 mm

Model	
product designation	3NP1 fuse switch disconnecter
busbar design	busbar thickness 5 or 10 mm
design of the safety monitoring	Without
design of the load switch strip form	No
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	For Rittal 60 mm busbar system
size of disconnecting link	3 and 2
size of fuse link	NH2, NH3
let-through current with closed switch maximum	60 kA
mechanical service life (operating cycles) typical	1 000
I ² t value with closed switch maximum	5 400 kA ² .s
power factor	
• at AC-22 B	0.65
• at AC-23 B	0.35
• with capacitive load	-0.25
fuse system	LV HRC fuse
degree of pollution	3
Voltage	
insulation voltage	
• rated value	690 V
• with degree of pollution 3 at AC rated value	690 V
• with degree of pollution 2 at AC rated value	1 000 V
power factor at AC-21 B	0.95
surge voltage resistance rated value	8 kV
operational current	
• at 35 °C rated value	630 A
• at 40 °C rated value	610 A
• at 45 °C rated value	575 A
• at 50 °C rated value	555 A
• at 55 °C rated value	530 A
• at AC-21 B at 240 V rated value	630 A
• at AC-21 B at 400 V rated value	630 A
• at AC-21 B at 500 V rated value	630 A
• at AC-21 B at 690 V rated value	630 A
• at AC-22 B at 240 V rated value	630 A
• at AC-22 B at 400 V rated value	630 A
• at AC-22 B at 500 V rated value	630 A

• at AC-22 B at 690 V rated value • at AC-23 B at 690 V rated value • at AC-23 B at 500 V rated value • at AC-23 B at 400 V rated value • at AC-23 B at 240 V rated value • at DC-21 B at 120 V rated value • at DC-21 B at 240 V rated value • at DC-21 B at 440 V rated value • at DC-22 B at 120 V rated value • at DC-22 B at 240 V rated value • at DC-22 B at 440 V rated value • at DC-23 B at 120 V rated value • at DC-23 B at 240 V rated value • at DC-23 B at 440 V rated value	500 A 200 A 500 A 630 A 630 A 630 A 630 A 630 A 630 A 630 A 500 A 400 A 400 A 250 A
let-through current with high-speed activation maximum permissible	50 kA
operating voltage • at AC rated value maximum • at DC rated value • at DC rated value maximum	690 V 440 V 440 V
Protection class	
protection class IP • with closed switch with cover or cable lug cover • with closed switch without cover or cable lug cover • open	IP40 IP30 IP20
Dissipation	
power loss [W] • with conventional rated thermal current without fuse per pole • with conventional rated thermal current without fuse per device • for rated value of the current at AC in hot operating state per pole • of the fuse per fuse maximum	30 W 90 W 78 W 48 W
Main circuit	
operational current • rated value • with capacitive load at 400 V rated value • with capacitive load at 500 V rated value	630 A 72 A 55 A
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use • main switch • switch disconnecter • EMERGENCY OFF switch • safety switch • maintenance/repair switch	No Yes No Yes Yes
Product details	
product component • undervoltage release • undervoltage release with leading contact	No No
product feature sealable	Yes
product extension auxiliary switch	Yes
product extension optional • locking capability • phase failure monitoring • fuse monitoring • voltage trigger • overvoltage protection monitoring	Yes Yes Yes No Yes

Product function	
product function overvoltage protection monitoring	No
Connections	
arrangement of electrical connectors for main current circuit	other
connectable conductor cross-section for main contacts	
• solid or stranded minimum • solid or stranded maximum • stranded minimum • stranded maximum	120 mm² 300 mm² 120 mm² 300 mm²
tightening torque with screw-type terminals	
• minimum • maximum	10 N·m 12 N·m
type of connectable conductor cross-sections of the laminated conductors maximum	40 x 18 mm
type of connection technology	Flat terminal
Mechanical Design	
height	306 mm
width	249.4 mm
width of the busbar	
• minimum • maximum	12 mm 30 mm
depth	161.5 mm
fastening method	busbar
fastening method	
• floor mounting • rail mounting	No Yes
mounting position	horizontal/vertical
busbar center-to-center spacing	60 mm
net weight	6.84 kg
Environmental conditions	
ambient temperature during operation	
• minimum • maximum	-25 °C 55 °C
ambient temperature during storage	
• minimum • maximum	-50 °C 80 °C
Certificates	
reference code according to IEC 81346-2	Q
Approvals Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)

General Product Approval	Test Certificates	Marine / Shipping	other
	Type Test Certificates/Test Report Special Test Certificate	 	Miscellaneous
other	Environment		

[Confirmation](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP1163-1JC10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP1163-1JC10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1163-1JC10

CAX-Online-Generator

<http://www.siemens.com/cax>


Tender specifications

<http://www.siemens.com/specifications>

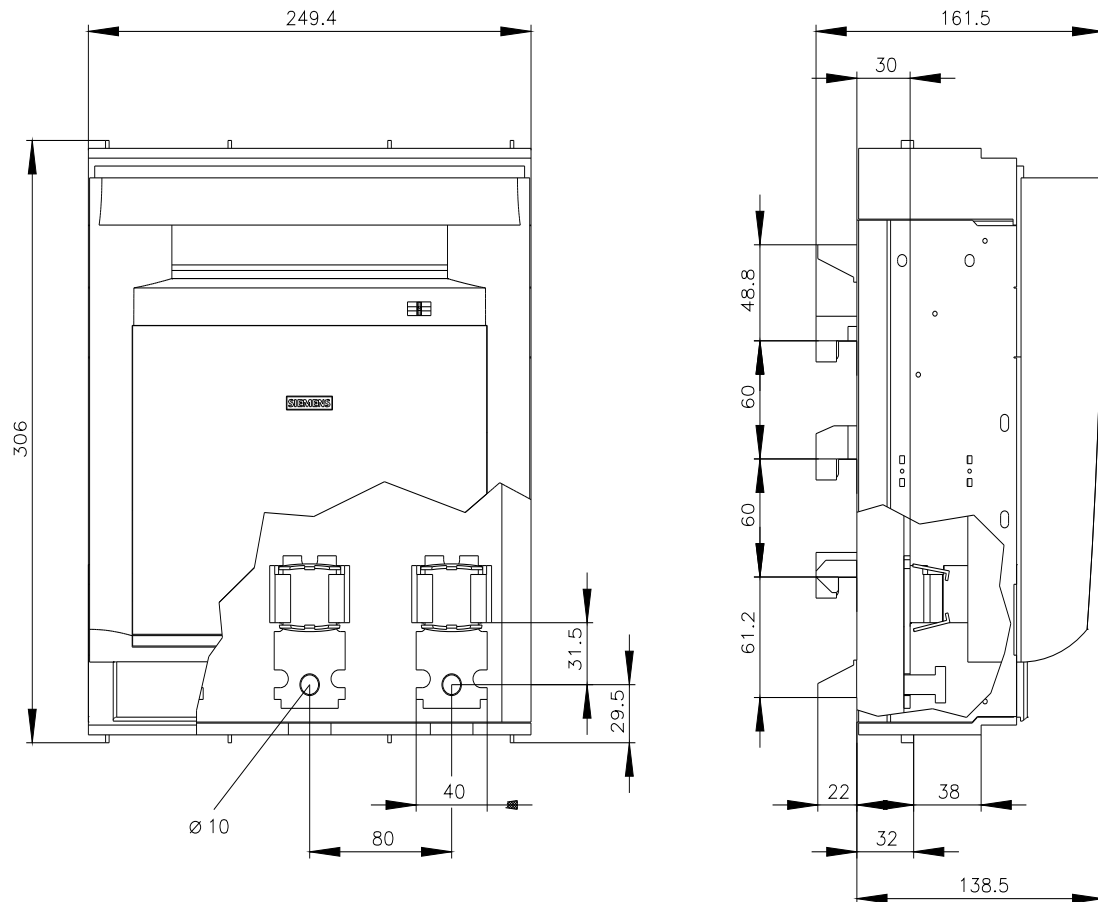



CB

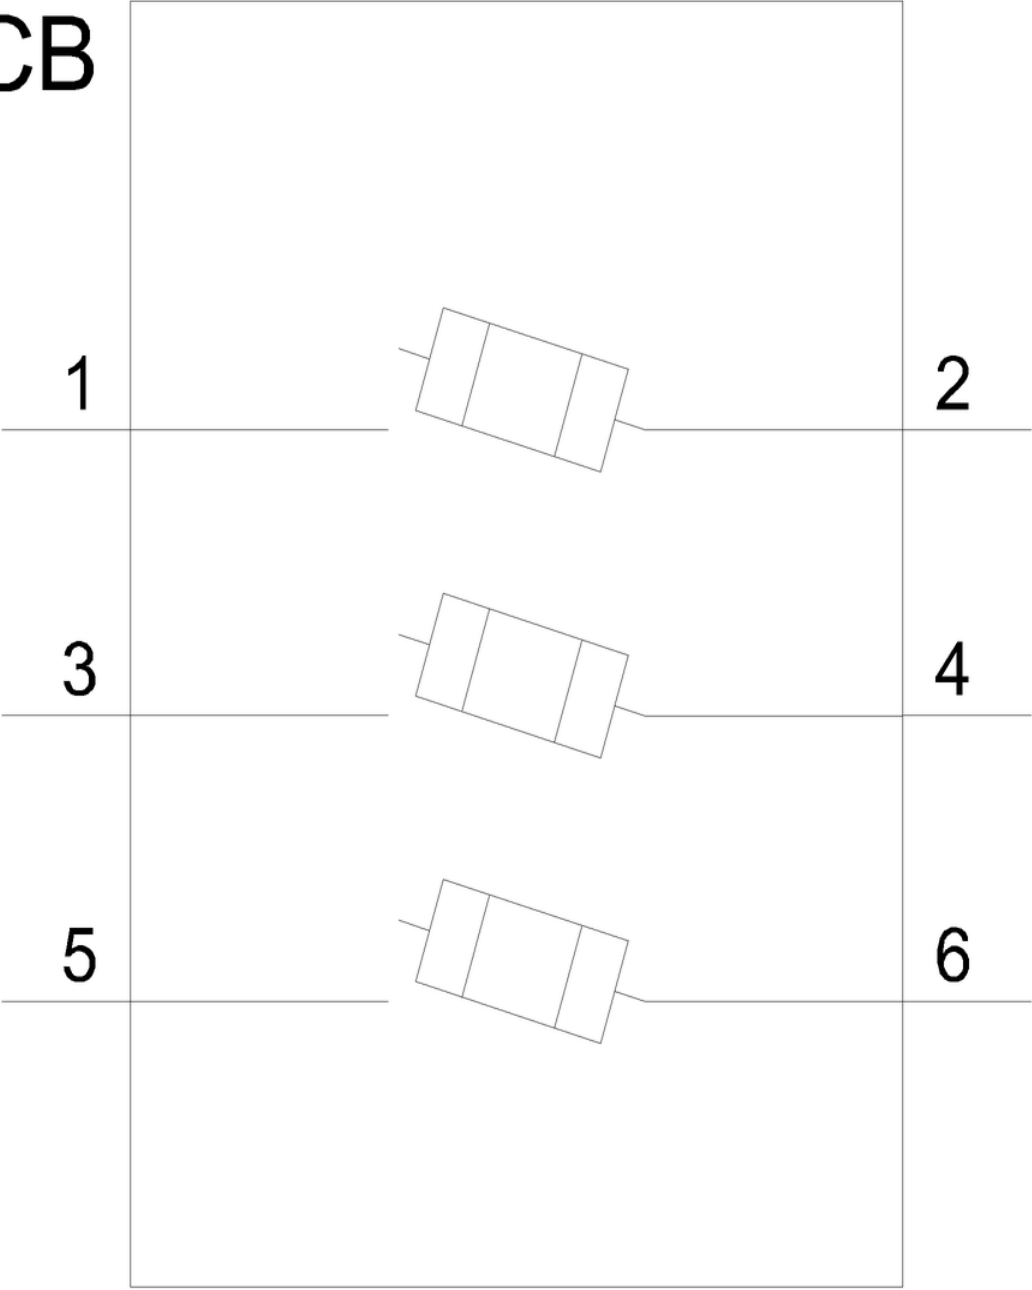

last modified:

3/11/2024 

