



Busbar system, accessories Busbar center-to-center spacing 40, 60 mm
Connection terminal Bar thickness: 10 mm+TT profile 1.5-16 mm²

Model	
product brand name	SETRON
product designation	Connecting terminal
design of the product	Accessories
Supply voltage	
operating voltage at AC rated value	690 V
Dissipation	
power loss [W]	0 W
suitability for use	for busbars 12, 15, 20, 25, 30 x 10 mm and mounting rails
according UL	
operational current according to UL 508 rated value	65 A
Connections	
type of connectable conductor cross-sections for AWG cables	AWG166
type of connectable conductor cross-sections for copper conductor stranded	1.5-16 mm ²
Mechanical Design	
net weight	22 g
Approvals Certificates	
General Product Approval	Test Certificates

[Confirmation](#)



EG-Konf.



UR



[Miscellaneous](#)

Marine / Shipping	other	Environment			
		Miscellaneous	Confirmation	Environmental Confirmations	Environmental Confirmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>


Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2BA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2BA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

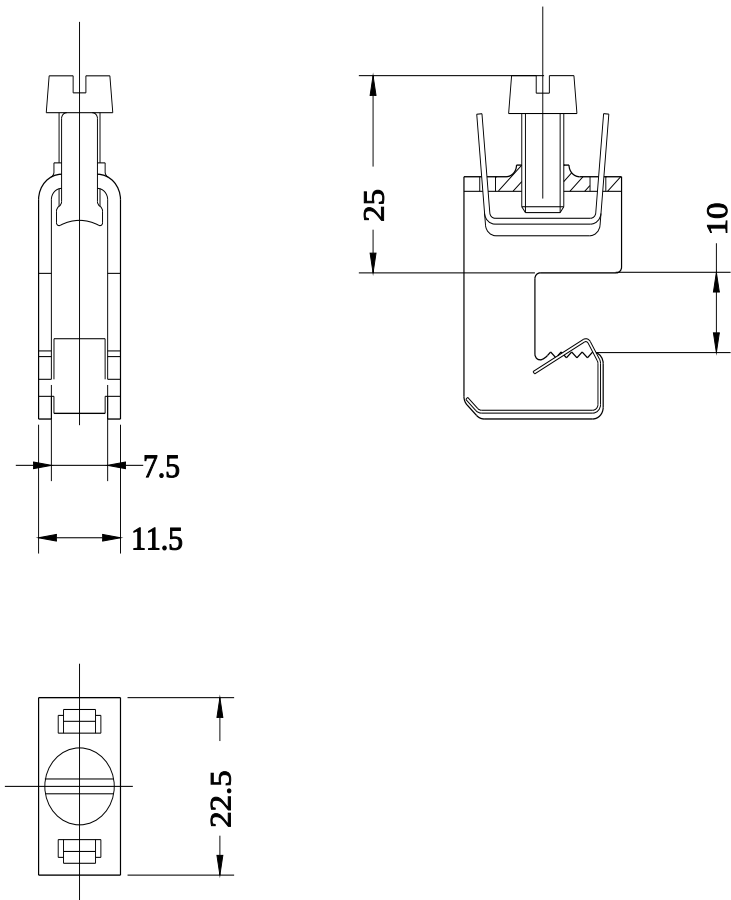

last modified:

7/9/2022

