



SETRON, fuse switch disconnecter 3NP1, 3-pole, NH3, 630 A, for 60mm 8US busbar system, flat terminal, Fuse monitoring electronic EFM15, cover level 32/70 mm

Model	
product designation	Fuse switch disconnecter
busbar design	busbar thickness 5 or 10 mm
design of the safety monitoring	electronic EFM 15
design of the load switch strip form	No
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	For 60 mm 8US busbar system
size of disconnecting link	3 and 2
size of fuse link	NH2, NH3
let-through current with closed switch maximum	60 kA
mechanical service life (operating cycles) typical	1 000
I ² t value with closed switch maximum	5 400 kA ² .s
power factor	
• at AC-22 B	0.65
• at AC-23 B	0.35
• with capacitive load	-0.25
fuse system	LV HRC fuse
degree of pollution	2
Voltage	
insulation voltage	
• rated value	690 V
• with degree of pollution 3 at AC rated value	690 V
• with degree of pollution 2 at AC rated value	1 000 V
power factor at AC-21 B	0.95
surge voltage resistance rated value	8 kV
operational current	
• at 35 °C rated value	630 A
• at 40 °C rated value	610 A
• at 45 °C rated value	575 A
• at 50 °C rated value	555 A
• at 55 °C rated value	530 A
• at AC-21 B at 240 V rated value	630 A
• at AC-21 B at 400 V rated value	630 A
• at AC-21 B at 500 V rated value	630 A
• at AC-21 B at 690 V rated value	630 A
• at AC-22 B at 240 V rated value	630 A
• at AC-22 B at 400 V rated value	630 A
• at AC-22 B at 500 V rated value	630 A

• at AC-22 B at 690 V rated value • at AC-23 B at 690 V rated value • at AC-23 B at 500 V rated value • at AC-23 B at 400 V rated value • at AC-23 B at 240 V rated value	500 A 200 A 500 A 630 A 630 A
let-through current with high-speed activation maximum permissible	50 kA
operating voltage • at AC rated value minimum • at AC rated value maximum	190 V 690 V
Protection class	
protection class IP • with closed switch with cover or cable lug cover • with closed switch without cover or cable lug cover • open	IP40 IP30 IP20
Dissipation	
power loss [W] • with conventional rated thermal current without fuse per pole • with conventional rated thermal current without fuse per device • for rated value of the current at AC in hot operating state per pole • of the fuse per fuse maximum	30 W 90 W 78 W 48 W
Main circuit	
operational current • rated value • with capacitive load at 400 V rated value • with capacitive load at 500 V rated value	630 A 72 A 55 A
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use main switch	No
suitability for use switch disconnecter	Yes
suitability for use EMERGENCY OFF switch	No
suitability for use safety switch	Yes
suitability for use maintenance/repair switch	Yes
Product details	
product function phase failure monitoring	No
product component	
• undervoltage release • undervoltage release with leading contact	No No
product feature sealable	Yes
product extension auxiliary switch	Yes
product extension optional • locking capability • phase failure monitoring • voltage trigger • overvoltage protection monitoring	Yes No No Yes
Product function	
product function overvoltage protection monitoring	No
Short circuit	
conditional short-circuit current (I_q) • at AC at 240 V with high-speed activation rated value • at AC at 500 V with high-speed activation rated value • at AC at 690 V with high-speed activation rated value • with closed switch at AC at 240 V rated value • with closed switch at AC at 500 V rated value • with closed switch at AC at 690 V rated value	50 kA 50 kA 50 kA 100 kA 100 kA 100 kA

Connections	
arrangement of electrical connectors for main current circuit	other
connectable conductor cross-section for main contacts	
• solid or stranded minimum	120 mm ²
• solid or stranded maximum	300 mm ²
• stranded minimum	120 mm ²
• stranded maximum	300 mm ²
tightening torque with screw-type terminals	
• minimum	10 N·m
• maximum	12 N·m
type of connectable conductor cross-sections of the laminated conductors maximum	40 x 18 mm
type of connection technology	Flat terminal

Mechanical Design	
height	306 mm
width	249.4 mm
width of the busbar	
• minimum	12 mm
• maximum	30 mm
depth	195.7 mm
fastening method	busbar
fastening method	
• floor mounting	No
• rail mounting	Yes
mounting position	horizontal/vertical
busbar center-to-center spacing	60 mm

Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-50 °C
• maximum	80 °C

Certificates	
reference code according to IEC 81346-2	Q

Approvals Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)



Test Certificates	Marine / Shipping	other	Environment
Type Test Certificates/Test Report		Miscellaneous	Confirmation
			
			Environmental Confirmations

Environment

[Environmental Confirmations](#)

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP1163-1BC14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP1163-1BC14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1163-1BC14


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

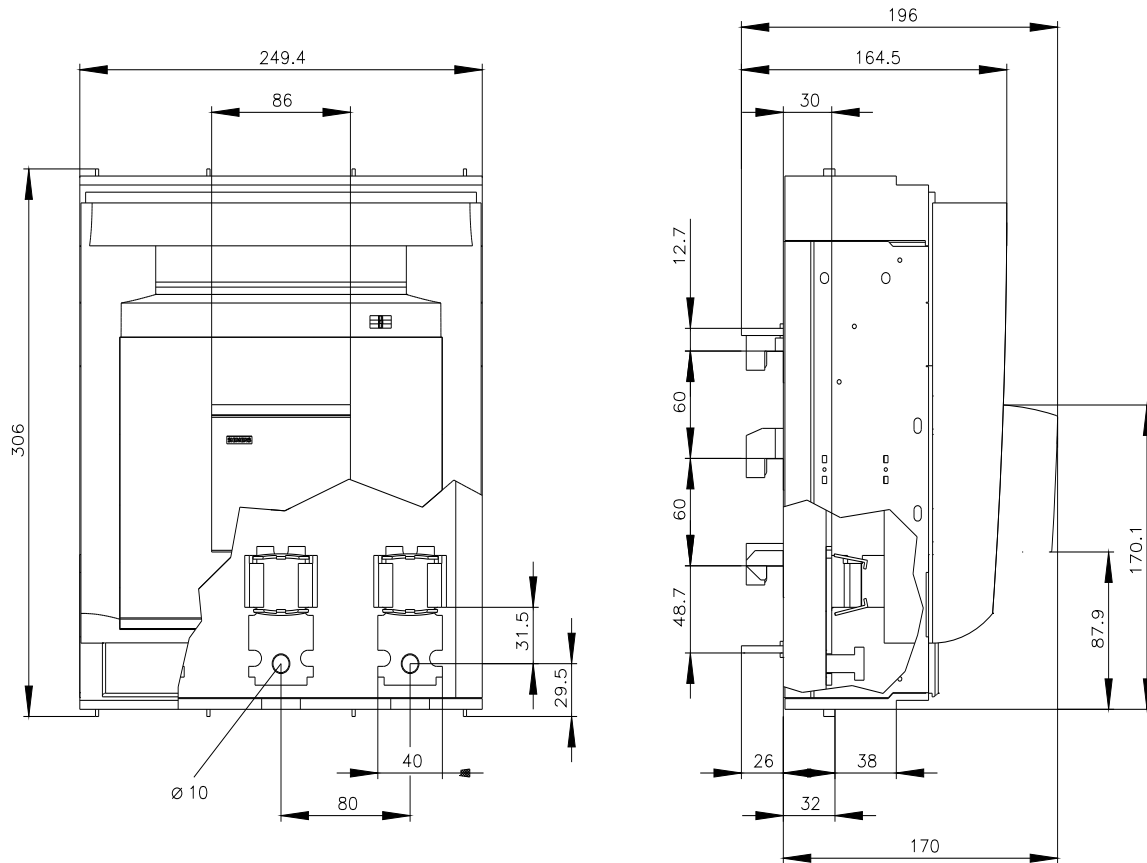

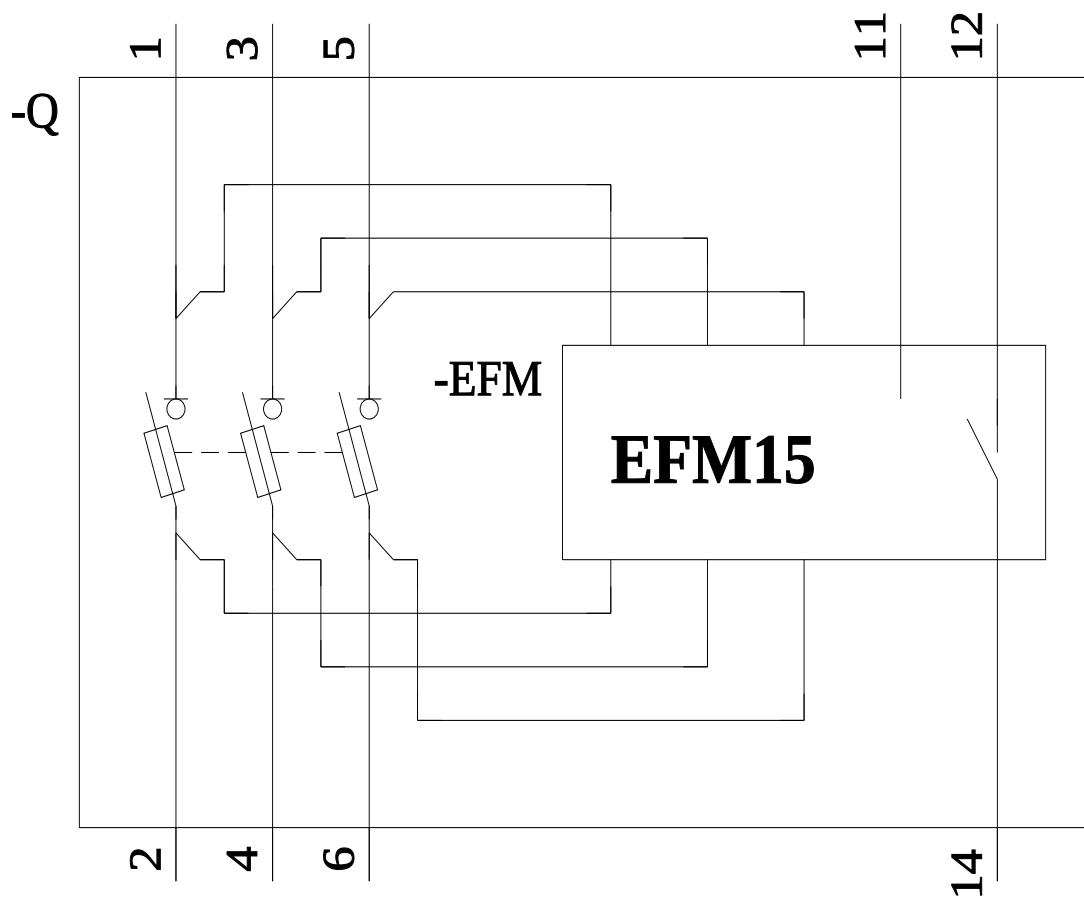

last modified:

9/28/2024 

