



Miniature circuit breaker 400 V 10kA, 3-pole, C, 25A

| Model                                                                               |                                                                                                            |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| product brand name                                                                  | SENTRON                                                                                                    |
| product designation                                                                 | Miniature circuit breaker                                                                                  |
| General technical data                                                              |                                                                                                            |
| number of poles                                                                     | 3                                                                                                          |
| design of pole                                                                      | 3P                                                                                                         |
| tripping characteristic class                                                       | C                                                                                                          |
| mechanical service life (operating cycles)                                          |                                                                                                            |
| • typical                                                                           | 10 000                                                                                                     |
| overvoltage category                                                                | III                                                                                                        |
| degree of pollution                                                                 | 2                                                                                                          |
| Voltage                                                                             |                                                                                                            |
| type of voltage of the operating voltage                                            | AC                                                                                                         |
| type of voltage                                                                     | Use only in alternating current or direct current circuits. Mixed use is not permitted.                    |
| insulation voltage (Ui)                                                             |                                                                                                            |
| • with multi-phase operation at AC rated value                                      | 440 V                                                                                                      |
| operational current                                                                 |                                                                                                            |
| • at 30 °C rated value                                                              | 25 A                                                                                                       |
| • at 40 °C rated value                                                              | 23.68 A                                                                                                    |
| • at 55 °C rated value                                                              | 21.54 A                                                                                                    |
| • at AC rated value                                                                 | 25 A                                                                                                       |
| Supply voltage                                                                      |                                                                                                            |
| supply voltage at AC                                                                | 400 V                                                                                                      |
| value range of the supply voltage frequency                                         | 50/60 Hz                                                                                                   |
| operating voltage                                                                   |                                                                                                            |
| • with multi-phase operation at AC maximum                                          | 440 V                                                                                                      |
| • at DC rated value maximum                                                         | 62.5 V                                                                                                     |
| •                                                                                   | The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V |
| Protection class                                                                    |                                                                                                            |
| protection class IP                                                                 | IP20, with connected conductors                                                                            |
| Breaking Capacity                                                                   |                                                                                                            |
| switching capacity current                                                          |                                                                                                            |
| • according to EN 60898 rated value                                                 | 10 kA                                                                                                      |
| • according to IEC 60947-2 rated value                                              | 10 kA                                                                                                      |
| energy limitation class                                                             | 3                                                                                                          |
| Dissipation                                                                         |                                                                                                            |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 2.3 W                                                                                                      |
| suitability for operation                                                           | Residential buildings/infrastructure                                                                       |

| Product details                                     |     |
|-----------------------------------------------------|-----|
| product feature touch protection                    | Yes |
| product component neutral conductor switching       | No  |
| product feature                                     |     |
| • halogen-free                                      | Yes |
| • sealable                                          | Yes |
| • silicon-free                                      | Yes |
| product extension installable supplementary devices | Yes |

| Connections                                                                  |                      |
|------------------------------------------------------------------------------|----------------------|
| connectable conductor cross-section solid                                    |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 25 mm <sup>2</sup>   |
| connectable conductor cross-section stranded                                 |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 25 mm <sup>2</sup>   |
| connectable conductor cross-section finely stranded with core end processing |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 25 mm <sup>2</sup>   |
| tightening torque with screw-type terminals                                  |                      |
| • minimum                                                                    | 2.5 N·m              |
| • maximum                                                                    | 3 N·m                |

| Mechanical Design             |       |
|-------------------------------|-------|
| height                        | 90 mm |
| width                         | 54 mm |
| depth                         | 76 mm |
| installation depth            | 70 mm |
| number of modular width units | 3     |
| mounting position             | any   |
| net weight                    | 458 g |

| Environmental conditions             |        |
|--------------------------------------|--------|
| ambient temperature during operation |        |
| • minimum                            | -25 °C |
| • maximum                            | 55 °C  |
| ambient temperature during storage   |        |
| • minimum                            | -40 °C |
| • maximum                            | 75 °C  |

| Approvals Certificates   |  |
|--------------------------|--|
| General Product Approval |  |



[Confirmation](#)



| General Product Approval | Test Certificates             | other                         | Environment                                 |
|--------------------------|-------------------------------|-------------------------------|---------------------------------------------|
|                          | <a href="#">Miscellaneous</a> | <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a>                |
|                          |                               | <a href="#">Miscellaneous</a> | <a href="#">Environmental Confirmations</a> |

#### Environment

[Environmental Confirmations](#)

| Further information |
|---------------------|
|---------------------|

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL4325-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL4325-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL4325-7](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL4325-7)


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

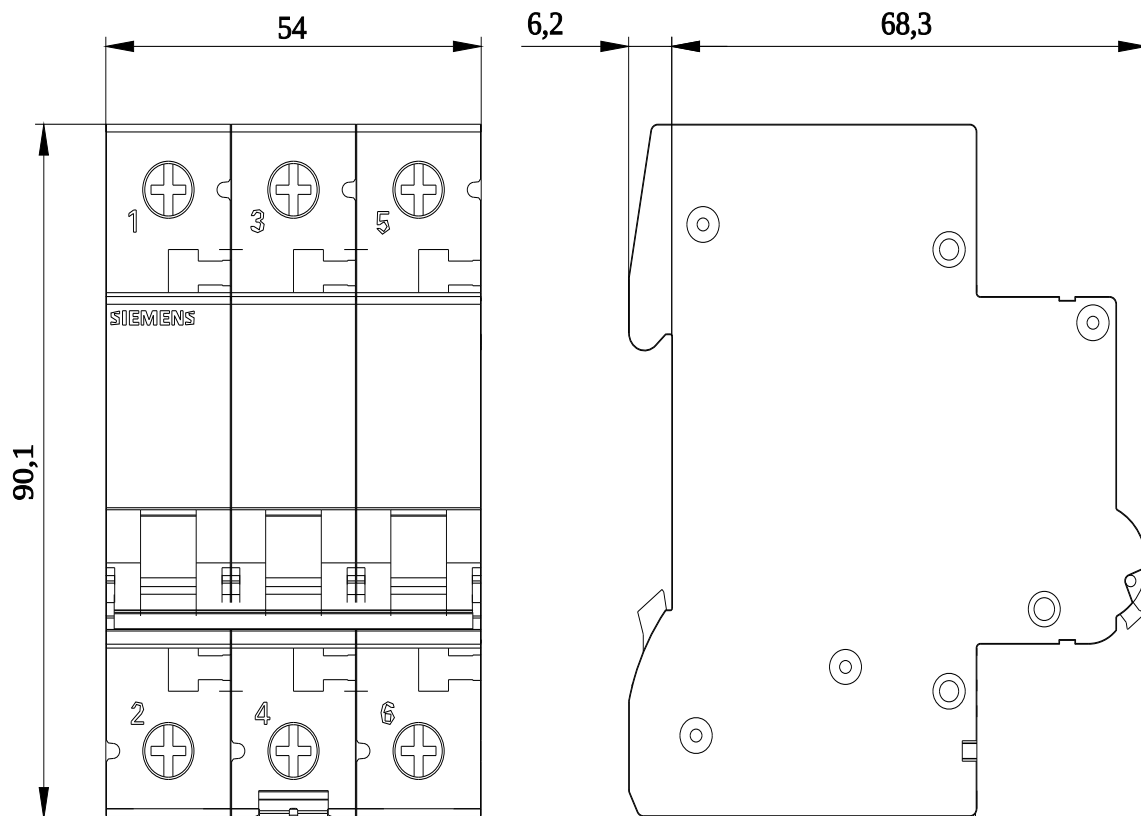

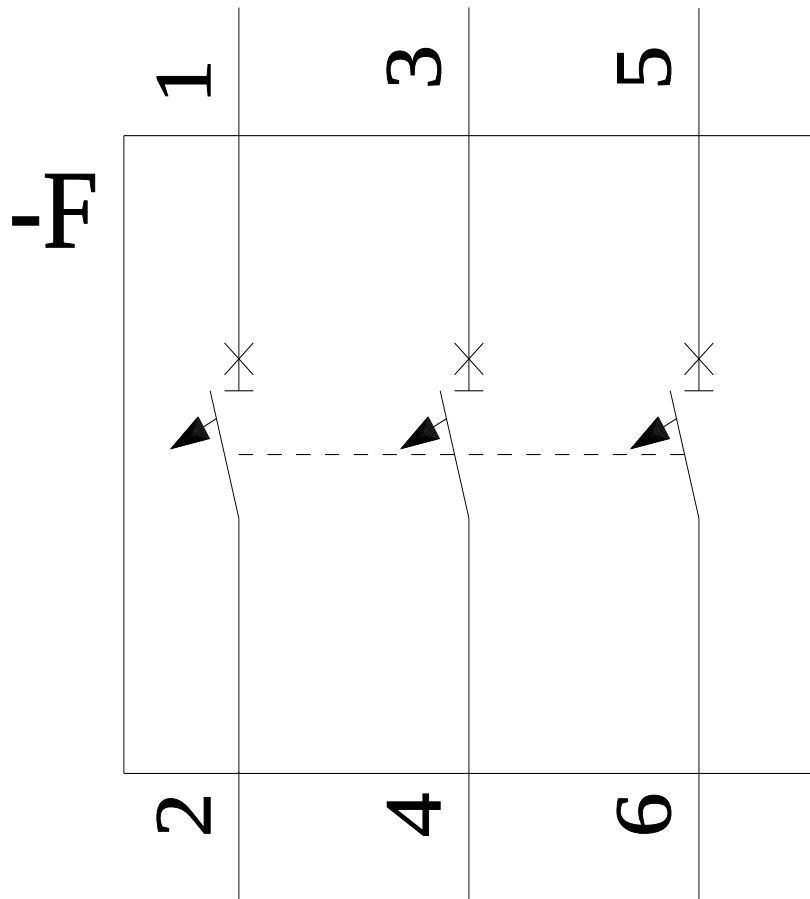

last modified:

9/3/2024 

