



SETRON, fuse switch disconnecter 3NP1, 3-pole, NH2, 400 A, for assembly and installation on mounting plate, Box terminal, Fuse monitoring electronic EFM15, cover level 70mm

Model	
product designation	Fuse switch disconnecter
design of the safety monitoring	electronic EFM 15
design of the load switch strip form	No
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	For assembly and installation on mounting plate
size of disconnecting link	2 and 1
size of fuse link	NH1, NH2
let-through current with closed switch maximum	40 kA
mechanical service life (operating cycles) typical	1 000
I ² t value with closed switch maximum	2 150 kA ² .s
power factor	
• at AC-22 B	0.65
• at AC-23 B	0.35
• with capacitive load	-0.25
fuse system	LV HRC fuse
degree of pollution	2
Voltage	
insulation voltage	
• rated value	690 V
• with degree of pollution 3 at AC rated value	690 V
• with degree of pollution 2 at AC rated value	1 000 V
power factor at AC-21 B	0.95
surge voltage resistance rated value	8 kV
operational current	
• at 35 °C rated value	400 A
• at 40 °C rated value	400 A
• at 45 °C rated value	392 A
• at 50 °C rated value	372 A
• at 55 °C rated value	356 A
• at AC-21 B at 240 V rated value	400 A
• at AC-21 B at 400 V rated value	400 A
• at AC-21 B at 500 V rated value	400 A
• at AC-21 B at 690 V rated value	400 A
• at AC-22 B at 240 V rated value	400 A
• at AC-22 B at 400 V rated value	400 A
• at AC-22 B at 500 V rated value	400 A
• at AC-22 B at 690 V rated value	400 A

• at AC-23 B at 690 V rated value • at AC-23 B at 500 V rated value • at AC-23 B at 400 V rated value • at AC-23 B at 240 V rated value	125 A 315 A 400 A 400 A
let-through current with high-speed activation maximum permissible	40 kA
operating voltage • at AC rated value minimum • at AC rated value maximum	190 V 690 V
Protection class	
protection class IP • with closed switch with cover or cable lug cover • with closed switch without cover or cable lug cover • open	IP40 IP30 IP20
Dissipation	
power loss [W] • with conventional rated thermal current without fuse per pole • with conventional rated thermal current without fuse per device • for rated value of the current at AC in hot operating state per pole • of the fuse per fuse maximum	14 W 42 W 48 W 34 W
Main circuit	
operational current • rated value • with capacitive load at 400 V rated value • with capacitive load at 500 V rated value	400 A 72 A 55 A
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use main switch	No
suitability for use switch disconnecter	Yes
suitability for use EMERGENCY OFF switch	No
suitability for use safety switch	Yes
suitability for use maintenance/repair switch	Yes
Product details	
product function phase failure monitoring	No
product component	
• undervoltage release • undervoltage release with leading contact	No No
product feature sealable	Yes
product extension auxiliary switch	Yes
product extension optional • locking capability • phase failure monitoring • voltage trigger • overvoltage protection monitoring	Yes No No Yes
Product function	
product function overvoltage protection monitoring	No
Short circuit	
conditional short-circuit current (I_q) • at AC at 240 V with high-speed activation rated value • at AC at 500 V with high-speed activation rated value • at AC at 690 V with high-speed activation rated value • with closed switch at AC at 240 V rated value • with closed switch at AC at 500 V rated value • with closed switch at AC at 690 V rated value	80 kA 80 kA 50 kA 100 kA 100 kA 100 kA
Connections	

arrangement of electrical connectors for main current circuit	other
connectable conductor cross-section for main contacts	
• solid or stranded minimum	120 mm²
• solid or stranded maximum	300 mm²
• finely stranded with core end processing minimum	120 mm²
• finely stranded with core end processing maximum	240 mm²
• stranded minimum	120 mm²
• stranded maximum	300 mm²
tightening torque with screw-type terminals	
• minimum	25 N·m
• maximum	25 N·m
type of connectable conductor cross-sections of the laminated conductors maximum	32 x 10 mm
type of connection technology	Box terminal

Mechanical Design

height	306 mm
width	209.4 mm
depth	161.6 mm
fastening method	mounting plate
fastening method	
• floor mounting	Yes
• rail mounting	No
mounting position	horizontal/vertical

Environmental conditions

ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-50 °C
• maximum	80 °C

Certificates

reference code according to IEC 81346-2	Q
--	---

Approvals Certificates

General Product Approval



[Confirmation](#)



[Miscellaneous](#)



Test Certificates	Marine / Shipping	other	Environment
-------------------	-------------------	-------	-------------

[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)



[Environmental Confirmations](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP1153-1DA24>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP1153-1DA24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1153-1DA24


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

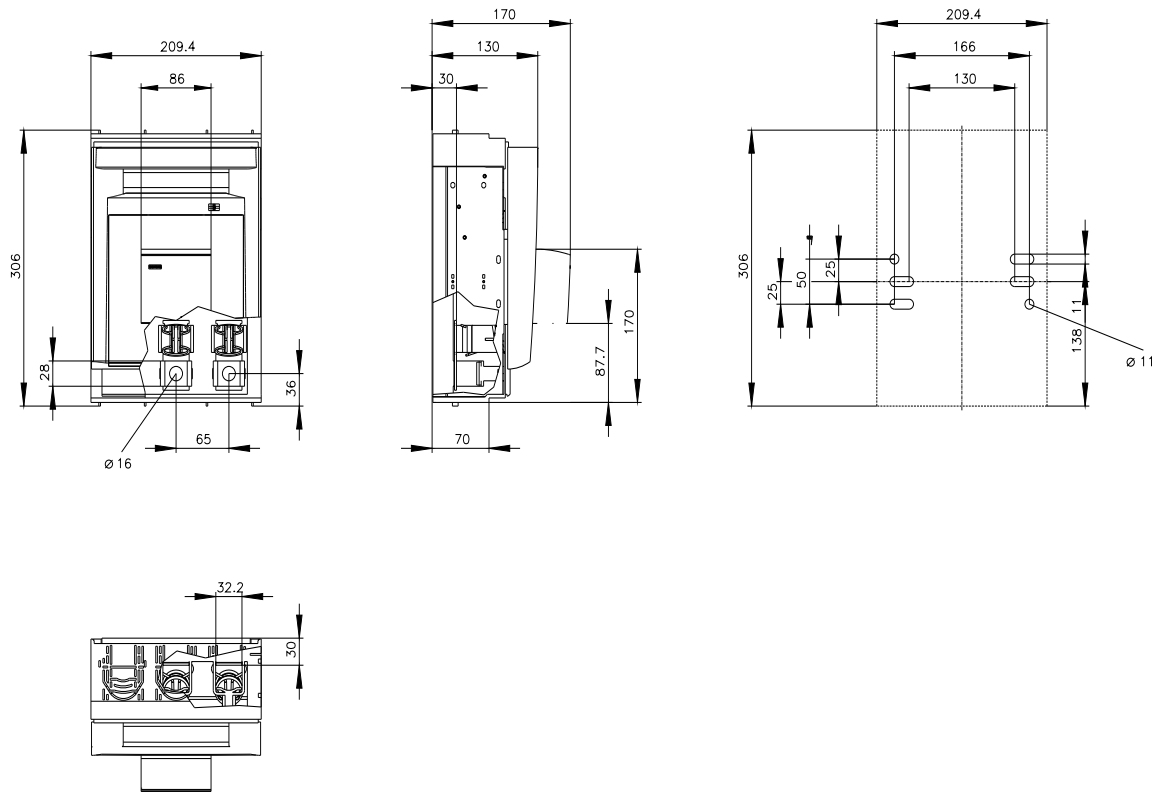

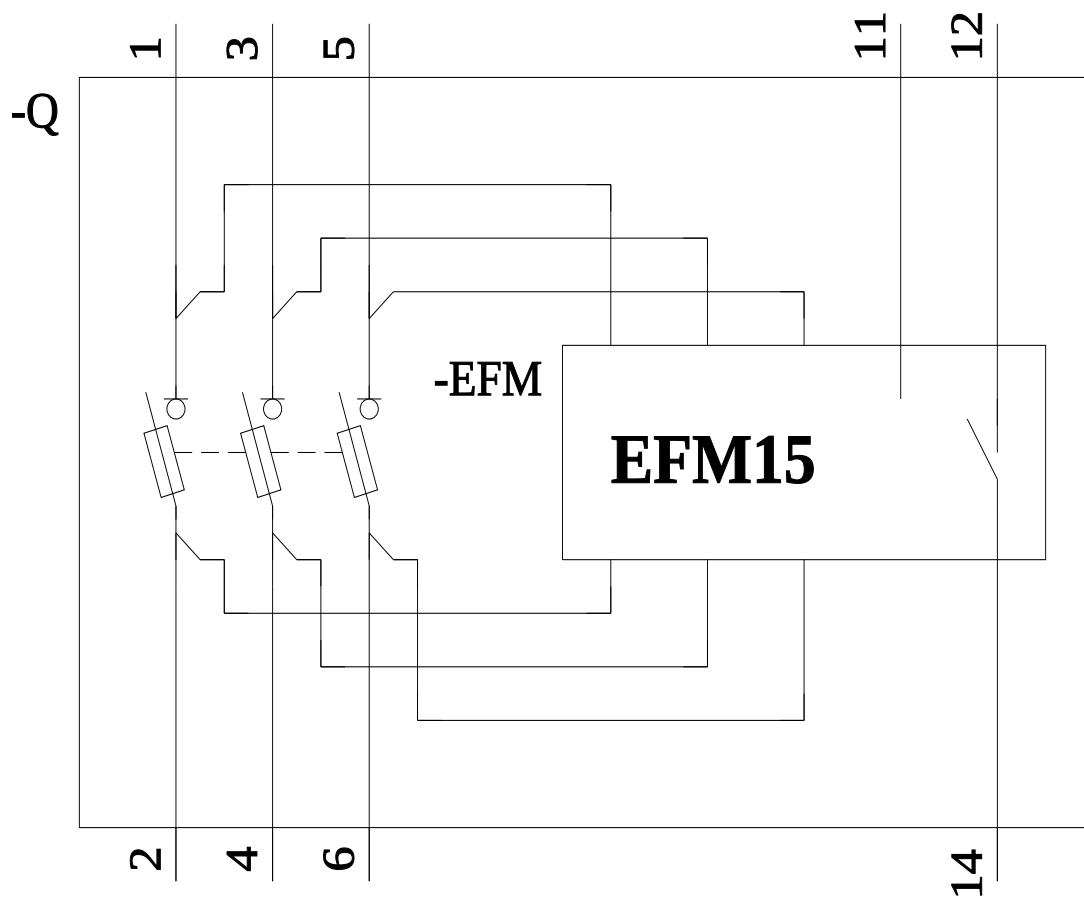

last modified:

9/28/2024 

