

Siemens  
EcoTech



SIRIUS soft starter 200-600 V 77 A, 24 V AC/DC Screw terminals Thermistor input



|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| product brand name                               | SIRIUS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| product category                                 | Hybrid switching devices                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| product designation                              | Soft starter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| product type designation                         | 3RW52                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| manufacturer's article number                    | <ul style="list-style-type: none"><li>• of standard HMI module usable <a href="#">3RW5980-0HS00</a></li><li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li><li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li><li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li><li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li><li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li><li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li><li>• of circuit breaker usable at 400 V <a href="#">3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li><li>• of circuit breaker usable at 500 V <a href="#">3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10</a></li><li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li><li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10</a></li><li>• of the gG fuse usable up to 690 V <a href="#">3NA3132-6; Type of coordination 1, Iq = 65 kA</a></li><li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3132-6; Type of coordination 1, Iq = 65 kA</a></li><li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1224-0; Type of coordination 2, Iq = 65 kA</a></li><li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE8024-1; Type of coordination 2, Iq = 65 kA</a></li></ul> |
| General technical data                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| starting voltage [%]                             | 30 ... 100 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| stopping voltage [%]                             | 50 %; non-adjustable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| start-up ramp time of soft starter               | 0 ... 20 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| current limiting value [%] adjustable            | 130 ... 700 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| certificate of suitability                       | <ul style="list-style-type: none"><li>• CE marking Yes</li><li>• UL approval Yes</li><li>• CSA approval Yes</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| product component                                | <ul style="list-style-type: none"><li>• HMI-High Feature No</li><li>• is supported HMI-Standard Yes</li><li>• is supported HMI-High Feature Yes</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| product feature integrated bypass contact system | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| number of controlled phases                      | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| buffering time in the event of power failure     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 100 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• for control circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 100 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>insulation voltage rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 600 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>degree of pollution</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 3, acc. to IEC 60947-4-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>impulse voltage rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 6 kV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>blocking voltage of the thyristor maximum</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1 800 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>service factor</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>surge voltage resistance rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 6 kV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>maximum permissible voltage for protective separation</b> <ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 600 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>shock resistance</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>vibration resistance</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 15 mm to 6 Hz; 2g to 500 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| utilization category according to IEC 60947-4-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | AC 53a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>reference code according to IEC 81346-2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Q                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Substance Prohibitance (Date)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 02/15/2018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>SVHC substance name</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5<br>Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4                                                                                                                                                                                                                                                                                                 |
| <b>Weight</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5.6 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>product function</b> <ul style="list-style-type: none"> <li>• ramp-up (soft starting)</li> <li>• ramp-down (soft stop)</li> <li>• Soft Torque</li> <li>• adjustable current limitation</li> <li>• pump ramp down</li> <li>• intrinsic device protection</li> <li>• motor overload protection</li> <li>• evaluation of thermistor motor protection</li> <li>• inside-delta circuit</li> <li>• auto-RESET</li> <li>• manual RESET</li> <li>• remote reset</li> <li>• communication function</li> <li>• operating measured value display</li> <li>• error logbook</li> <li>• via software parameterizable</li> <li>• via software configurable</li> <li>• <b>PROFInergy</b></li> <li>• <b>firmware update</b></li> <li>• <b>removable terminal for control circuit</b></li> <li>• torque control</li> <li>• analog output</li> </ul> | Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)<br>Yes; Type A PTC or Klixon / Thermoclick<br>Yes<br>Yes<br>Yes<br>Yes; By turning off the control supply voltage<br>Yes<br>Yes; Only in conjunction with special accessories<br>Yes; Only in conjunction with special accessories<br>No<br>Yes<br>Yes; in connection with the PROFINET Standard communication module<br>Yes<br>Yes<br>No<br>No |
| <b>Power Electronics</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 77 A<br>68 A<br>62 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>operational current at inside-delta circuit</b> <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 133 A<br>118 A<br>107 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>operating voltage</b> <ul style="list-style-type: none"> <li>• rated value</li> <li>• at inside-delta circuit rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 200 ... 600 V<br>200 ... 600 V                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>relative negative tolerance of the operating voltage</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -15 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>relative positive tolerance of the operating voltage</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -15 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 10 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                                                                          |                                        |
|--------------------------------------------------------------------------|----------------------------------------|
| <b>operating power for 3-phase motors</b>                                |                                        |
| • at 230 V at 40 °C rated value                                          | 22 kW                                  |
| • at 230 V at inside-delta circuit at 40 °C rated value                  | 37 kW                                  |
| • at 400 V at 40 °C rated value                                          | 37 kW                                  |
| • at 400 V at inside-delta circuit at 40 °C rated value                  | 75 kW                                  |
| • at 500 V at 40 °C rated value                                          | 45 kW                                  |
| • at 500 V at inside-delta circuit at 40 °C rated value                  | 90 kW                                  |
| <b>Operating frequency 1 rated value</b>                                 | 50 Hz                                  |
| <b>Operating frequency 2 rated value</b>                                 | 60 Hz                                  |
| <b>relative negative tolerance of the operating frequency</b>            | -10 %                                  |
| <b>relative positive tolerance of the operating frequency</b>            | 10 %                                   |
| <b>adjustable motor current</b>                                          |                                        |
| • at rotary coding switch on switch position 1                           | 32 A                                   |
| • at rotary coding switch on switch position 2                           | 35 A                                   |
| • at rotary coding switch on switch position 3                           | 38 A                                   |
| • at rotary coding switch on switch position 4                           | 41 A                                   |
| • at rotary coding switch on switch position 5                           | 44 A                                   |
| • at rotary coding switch on switch position 6                           | 47 A                                   |
| • at rotary coding switch on switch position 7                           | 50 A                                   |
| • at rotary coding switch on switch position 8                           | 53 A                                   |
| • at rotary coding switch on switch position 9                           | 56 A                                   |
| • at rotary coding switch on switch position 10                          | 59 A                                   |
| • at rotary coding switch on switch position 11                          | 62 A                                   |
| • at rotary coding switch on switch position 12                          | 65 A                                   |
| • at rotary coding switch on switch position 13                          | 68 A                                   |
| • at rotary coding switch on switch position 14                          | 71 A                                   |
| • at rotary coding switch on switch position 15                          | 74 A                                   |
| • at rotary coding switch on switch position 16                          | 77 A                                   |
| • minimum                                                                | 32 A                                   |
| <b>adjustable motor current</b>                                          |                                        |
| • for inside-delta circuit at rotary coding switch on switch position 1  | 55.4 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 2  | 60.6 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 3  | 65.8 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 4  | 71 A                                   |
| • for inside-delta circuit at rotary coding switch on switch position 5  | 76.2 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 6  | 81.4 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 7  | 86.6 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 8  | 91.8 A                                 |
| • for inside-delta circuit at rotary coding switch on switch position 9  | 97 A                                   |
| • for inside-delta circuit at rotary coding switch on switch position 10 | 102 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 11 | 107 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 12 | 113 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 13 | 118 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 14 | 123 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 15 | 128 A                                  |
| • for inside-delta circuit at rotary coding switch on switch position 16 | 133 A                                  |
| • at inside-delta circuit minimum                                        | 55.4 A                                 |
| <b>minimum load [%]</b>                                                  | 15 %; Relative to smallest settable Ie |
| <b>power loss [W] for rated value of the current at AC</b>               |                                        |
| • at 40 °C after startup                                                 | 35 W                                   |

|                                                                                                                                                   |                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>                                      | 32 W<br>31 W                                                                                                                                                                   |
| <b>power loss [W] at AC at current limitation 350 %</b>                                                                                           |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul> | 1 107 W<br>933 W<br>826 W                                                                                                                                                      |
| <b>Control circuit/ Control</b>                                                                                                                   |                                                                                                                                                                                |
| <b>type of voltage of the control supply voltage</b>                                                                                              | AC/DC                                                                                                                                                                          |
| <b>control supply voltage at AC</b>                                                                                                               |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>                                          | 24 V<br>24 V                                                                                                                                                                   |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>                                                                   | -20 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>                                                                   | 20 %                                                                                                                                                                           |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>                                                                   | -20 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>                                                                   | 20 %                                                                                                                                                                           |
| <b>control supply voltage frequency</b>                                                                                                           | 50 ... 60 Hz                                                                                                                                                                   |
| <b>relative negative tolerance of the control supply voltage frequency</b>                                                                        | -10 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage frequency</b>                                                                        | 10 %                                                                                                                                                                           |
| <b>control supply voltage at DC rated value</b>                                                                                                   | 24 V                                                                                                                                                                           |
| <b>relative negative tolerance of the control supply voltage at DC</b>                                                                            | -20 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage at DC</b>                                                                            | 20 %                                                                                                                                                                           |
| <b>control supply current in standby mode rated value</b>                                                                                         | 160 mA                                                                                                                                                                         |
| <b>holding current in bypass operation rated value</b>                                                                                            | 380 mA                                                                                                                                                                         |
| <b>inrush current by closing the bypass contacts maximum</b>                                                                                      | 7.6 A                                                                                                                                                                          |
| <b>inrush current peak at application of control supply voltage maximum</b>                                                                       | 3.3 A                                                                                                                                                                          |
| <b>duration of inrush current peak at application of control supply voltage</b>                                                                   | 12.1 ms                                                                                                                                                                        |
| <b>design of the overvoltage protection</b>                                                                                                       | Varistor                                                                                                                                                                       |
| <b>design of short-circuit protection for control circuit</b>                                                                                     | 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>                                                                                                                            |                                                                                                                                                                                |
| <b>number of digital inputs</b>                                                                                                                   | 1                                                                                                                                                                              |
| <b>number of digital outputs</b>                                                                                                                  | 3                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>                                                                           | 2                                                                                                                                                                              |
| <b>digital output version</b>                                                                                                                     | 2 normally-open contacts (NO) / 1 changeover contact (CO)                                                                                                                      |
| <b>number of analog outputs</b>                                                                                                                   | 0                                                                                                                                                                              |
| <b>switching capacity current of the relay outputs</b>                                                                                            |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>                         | 3 A<br>1 A                                                                                                                                                                     |
| <b>Installation/ mounting/ dimensions</b>                                                                                                         |                                                                                                                                                                                |
| <b>mounting position</b>                                                                                                                          | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back                                                       |
| <b>fastening method</b>                                                                                                                           | screw fixing                                                                                                                                                                   |
| <b>height</b>                                                                                                                                     | 306 mm                                                                                                                                                                         |
| <b>width</b>                                                                                                                                      | 185 mm                                                                                                                                                                         |
| <b>depth</b>                                                                                                                                      | 203 mm                                                                                                                                                                         |
| <b>required spacing with side-by-side mounting</b>                                                                                                |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• forwards</li> <li>• backwards</li> <li>• upwards</li> <li>• downwards</li> <li>• at the side</li> </ul>  | 10 mm<br>0 mm<br>100 mm<br>75 mm<br>5 mm                                                                                                                                       |
| <b>weight without packaging</b>                                                                                                                   | 5.6 kg                                                                                                                                                                         |
| <b>Connections/ Terminals</b>                                                                                                                     |                                                                                                                                                                                |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for control circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | box terminal<br>screw-type terminals                                                                                                                                                                                                                                                                                                                                             |
| <b>width of connection bar maximum</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 25 mm                                                                                                                                                                                                                                                                                                                                                                            |
| <b>wire length for thermistor connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> <li>with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> <li>with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                                               | 50 m<br>150 m<br>250 m                                                                                                                                                                                                                                                                                                                                                           |
| <b>type of connectable conductor cross-sections for main contacts for box terminal</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>using the front clamping point solid</li> <li>using the front clamping point finely stranded with core end processing</li> <li>using the front clamping point stranded</li> <li>using the back clamping point solid</li> <li>r box terminal using the back clamping point</li> <li>using both clamping points solid</li> <li>using both clamping points finely stranded with core end processing</li> <li>using both clamping points stranded</li> <li>using the back clamping point finely stranded with core end processing</li> <li>using the back clamping point stranded</li> </ul> | 1x (2.5 ... 16 mm <sup>2</sup> )<br>1x (2.5 ... 50 mm <sup>2</sup> )<br>1x (10 ... 70 mm <sup>2</sup> )<br>1x (2.5 ... 16 mm <sup>2</sup> )<br>1x (10 ... 2/0)<br>2x (2.5 ... 16 mm <sup>2</sup> )<br>2x (2.5 ... 35 mm <sup>2</sup> )<br>2x (6 ... 16 mm <sup>2</sup> ), 2x (10 ... 50 mm <sup>2</sup> )<br>1x (2.5 ... 50 mm <sup>2</sup> )<br>1x (10 ... 70 mm <sup>2</sup> ) |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>for control circuit solid</li> <li>for control circuit finely stranded with core end processing</li> <li>for AWG cables for control circuit solid</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                             | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>1x (20 ... 12), 2x (20 ... 14)                                                                                                                                                                                                   |
| <b>wire length</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>between soft starter and motor maximum</li> <li>at the digital inputs at AC maximum</li> <li>at the digital inputs at DC maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                              | 800 m<br>100 m<br>1 000 m                                                                                                                                                                                                                                                                                                                                                        |
| <b>tightening torque</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4.5 ... 6 N·m<br>0.8 ... 1.2 N·m                                                                                                                                                                                                                                                                                                                                                 |
| <b>tightening torque [lbf·in]</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 40 ... 53 lbf·in<br>7 ... 10.3 lbf·in                                                                                                                                                                                                                                                                                                                                            |
| <b>Ambient conditions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                  |
| installation altitude at height above sea level maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5 000 m; Derating as of 1000 m, see catalog                                                                                                                                                                                                                                                                                                                                      |
| <b>ambient temperature</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage and transport</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above<br>-40 ... +80 °C                                                                                                                                                                                                                                                                                      |
| <b>environmental category</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>during operation according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during transport according to IEC 60721</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                       | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6<br>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4<br>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)                                                                                                |
| <b>Environmental footprint</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                  |
| Global Warming Potential [CO2 eq] total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 296 kg                                                                                                                                                                                                                                                                                                                                                                           |
| Global Warming Potential [CO2 eq] during manufacturing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 67.7 kg                                                                                                                                                                                                                                                                                                                                                                          |
| global warming potential [CO2 eq] during sales                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.84 kg                                                                                                                                                                                                                                                                                                                                                                          |
| Global Warming Potential [CO2 eq] during operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 242 kg                                                                                                                                                                                                                                                                                                                                                                           |
| Global Warming Potential [CO2 eq] after end of life                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -15.7 kg                                                                                                                                                                                                                                                                                                                                                                         |
| Siemens Eco Profile (SEP)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Siemens EcoTech                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Electromagnetic compatibility</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>EMC emitted interference</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | acc. to IEC 60947-4-2: Class A                                                                                                                                                                                                                                                                                                                                                   |
| <b>Communication/ Protocol</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>communication module is supported</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>PROFINET standard</li> <li>EtherNet/IP</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Yes<br>Yes                                                                                                                                                                                                                                                                                                                                                                       |

- Modbus RTU
- Modbus TCP
- PROFIBUS

Yes  
Yes  
Yes

#### UL/CSA ratings

##### manufacturer's article number

###### • of circuit breaker usable for Standard Faults

- at 460/480 V according to UL
- 60/480 V according to UL
- at 460/480 V at inside-delta circuit according to UL
- 60/480 V at inside-delta circuit according to UL
- at 575/600 V according to UL
- at 575/600 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 125 A; I<sub>q</sub> = 10 kA  
Siemens type: 3VA51, max. 125 A; I<sub>q</sub> max = 65 kA  
Siemens type: 3VA51, max. 125 A; I<sub>q</sub> = 10 kA  
Siemens type: 3VA51, max. 125 A; I<sub>q</sub> max = 65 kA  
Siemens type: 3VA51, max. 125 A; I<sub>q</sub> = 10 kA  
Siemens type: 3VA51, max. 125 A; I<sub>q</sub> = 10 kA

###### • of the fuse

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class RK5 / K5, max. 250 A; I<sub>q</sub> = 10 kA  
Type: Class J / L, max. 250 A; I<sub>q</sub> = 100 kA  
Type: Class RK5 / K5, max. 250 A; I<sub>q</sub> = 10 kA  
Type: Class J / L, max. 250 A; I<sub>q</sub> = 100 kA

##### operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 575/600 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value
- at 575/600 V at inside-delta circuit at 50 °C rated value

20 hp  
25 hp  
50 hp  
60 hp  
30 hp  
40 hp  
75 hp  
100 hp

##### contact rating of auxiliary contacts according to UL

R300-B300

##### Electrical Safety

##### protection class IP on the front according to IEC 60529

IP00; IP20 with cover

##### touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front with cover

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



##### EMV

##### Test Certificates

##### Marine / Shipping



[KC](#)

[Type Test Certificates/Test Report](#)



##### Marine / Shipping

##### other

##### Environment



[Confirmation](#)

Siemens  
EcoTech



[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5226-1TC05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5226-1TC05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5226-1TC05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5226-1TC05&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5226-1TC05&lang=en)

Characteristic: Tripping characteristics,  $I^2t$ , Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5226-1TC05/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5226-1TC05&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

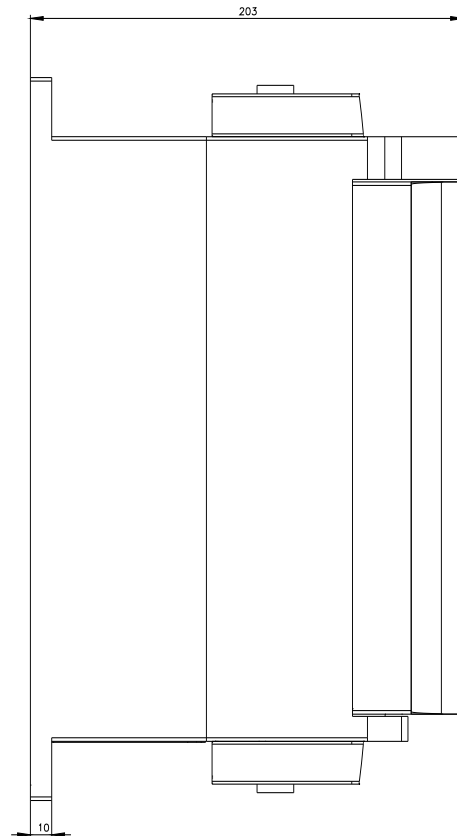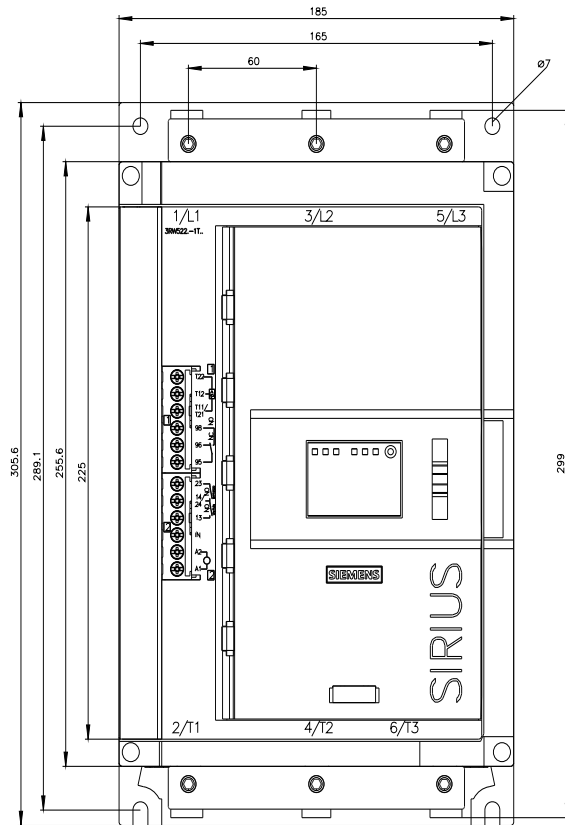

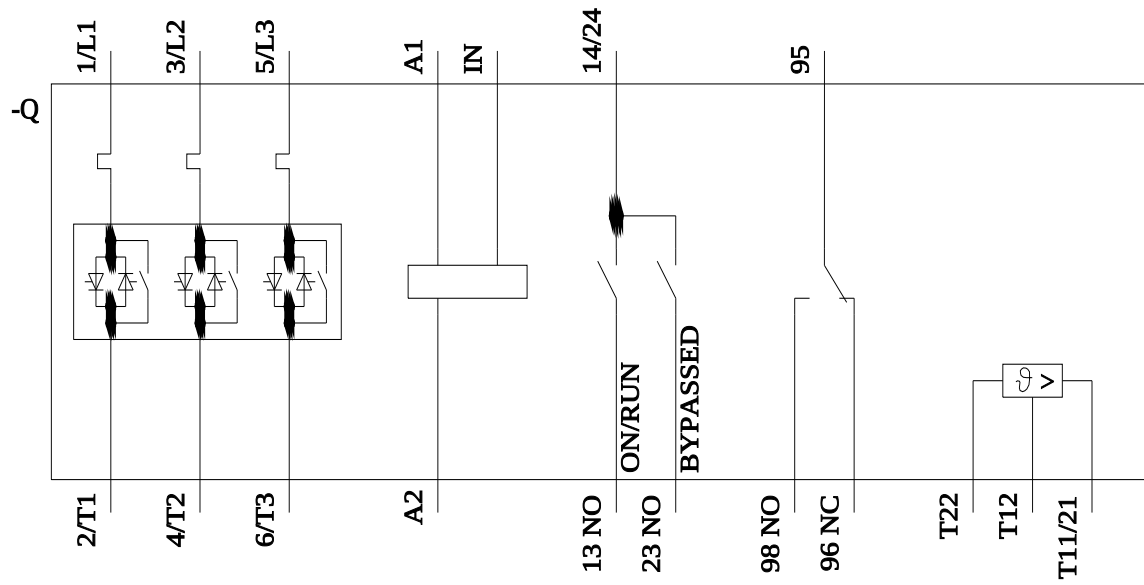

last modified:

11/9/2024

