

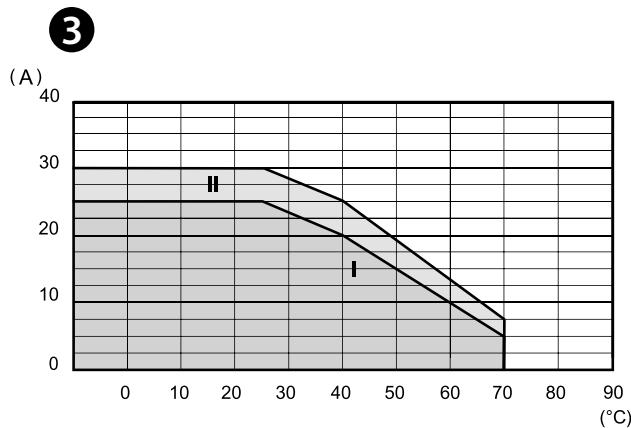


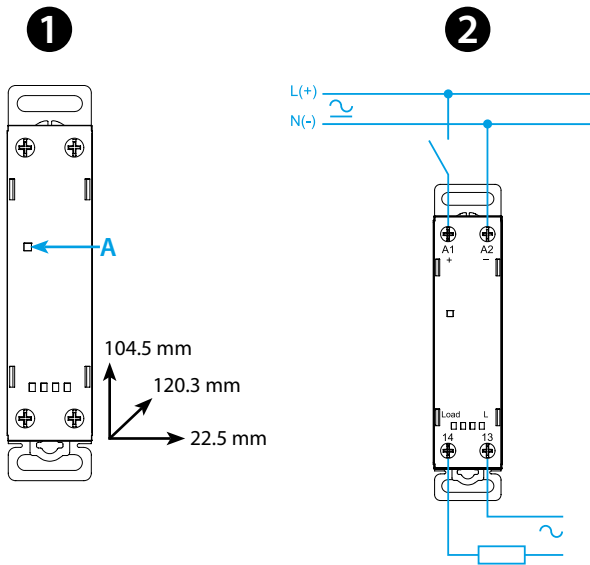

77.21

	77.21.x.xxx.8250	77.21.x.xxx.8251
	U_N 24 V DC $U_{min}-U_{max}$ (4-32)V DC P 0.4 W U_N 230 V AC $U_{min}-U_{max}$ (40-305)V AC P 7.5 VA (50 Hz) / 0.9 W	
	1 NO (SPST-NO) 25 A (19...305)V AC	
	AC7a (cos $\varphi=0.8$, @ 25°C) 25 A	AC7a (cos $\varphi=0.8$, @ 25°C) 25 A
	AC15 25 A	AC15 25 A
	(M) (230 V AC) -	(M) (230 V AC) 1 kW
	(230 V) 4000 W CFL / LED 3000 W 4000 W	(230 V) 2500 W CFL / LED 1500 W 2500 W
	(-20...+80)°C	
	IP20	

LED	U_N
	OFF
	ON

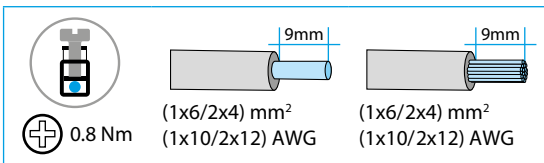

77.21
MODULAIR SOLID STATE RELAIS (SSR)

1 FRONTAANZICHT

A LED

2 AANSLUITSCHEMA

3 UITGANGSSPECIFICATIES

Belastbaarheid uitgang - Continustroom uitgezet tegen de omgevingstemperatuur

I Zonder afstand tussen de SSR's

II SSR is individueel geplaatst zonder invloed van andere componenten

OVERIGE GEGEVENS

- AC uitgangskring (met triac)
- 77.21.x.xxx.8250 Uitvoering met nuldoorgangsfunctie
- 77.21.x.xxx.8251 Uitvoering zonder nuldoorgangsfunctie
- Minimum schakelstroom (bij 250 V): 100 mA
- Vermogensverlies (bij 25 A): 15 W
- 35 mm railmontage (EN60715)