

SOLUTIONS FOR ELECTRICAL PANELS AND INDUSTRIAL AUTOMATION

The widest range of relays and accessories for the industry



ABOUT US



Finder was founded in Italy in 1954. Since then it has been designing and manufacturing a wide range of electromechanical and electronic components for both the residential and industrial sectors.

Today, thanks to its global vision, Finder now distributes its products around the world through a network of 29 company-owned subsidiaries and more than 80 trade partnerships.

Finder is an international family made up of more than 2000 individuals, all united by the same values and passion for our products.



14,000+ different products to satisfy a myriad of applications. From products at the heart of automation to the control of machines, power, time, temperature, liquid level and light

OUR PRODUCTS CARRY MORE CERTIFICATIONS THAN ANY OTHER RELAY MANUFACTURER



FINDER IS AN ITALIAN BRAND WITH A WORLDWIDE PRESENCE

4 PRODUCTION PLANTS IN EUROPE

29 SUBSIDIARIES

80+ OFFICIAL DISTRIBUTORS



ENVIRONMENTAL, SOCIAL AND GOVERNANCE (ESG)

Finder considers social and environmental sustainability as fundamental principles of doing business, just as it believes that business growth must develop in synergy with a conscious vision of the future.

That is why Finder is committed to reducing and eliminating CO2 emissions, focusing on circularity, caring for its employees to foster a safe, fair and inclusive work environment, spreading a culture of integrity and transparency, and collaborating with stakeholders who share its values.

AUTONOMY AND INDEPENDENCE

Finder's managerial, financial and technological autonomy allows optimal control over all its business processes, the results of which include simplified customs procedures and a high reliability of commercial relations.



ISO 9001:2015
Quality management system




IECEx
Equipment for Use in Explosive Atmospheres



ISO 14001:2015
Environmental management system




ISO 27001-27701
Information Security and Privacy Management System



ISO 45001:2018
Health and safety management system



ISO 50001:2018
Energy management system



ISO 14064-1:2019
Carbon Footprint verification



AEOF
Simplified customs and enhanced supply chain security



FSC
Forest Stewardship Council



Cribis Prime Company
Recognition of highest reliability of commercial relations



PROGRAMMABLE LOGIC RELAYS	8A Series	OPTA - PROGRAMMABLE LOGIC RELAYS	2
INDUSTRIAL AND PCB RELAYS (EMR OR SSR)	30 Series	Subminiature DIL relays 2 A	4
	32 Series	Subminiature PCB relays 6 A	4
	34 Series	Ultra-slim PCB Relays (EMR or SSR) 0.1 - 0.2 - 2 - 6 A	5
	36 Series	Miniature PCB relays 10 A	5
	40 Series	Miniature PCB/Plug-in relays 8 - 10 - 12 - 16 A	6
	41 Series	Low profile PCB relays (EMR or SSR) 3 - 5 - 8 - 12 - 16 A	6
	43 Series	Low profile PCB relays 10 - 16 A.....	7
	45 Series	Miniature PCB Relays + Faston 250, 10 - 16 A.....	7
	46 Series	Miniature Industrial relay 8 - 16 A	8
	55 Series	General purpose relays 7 - 10 A	8
	56 Series	Miniature power relays 12 A	9
	60 Series	Industrial relays 6 - 10 A	9
	62 Series	Power relays 16 A	10
	65 Series	Power relays 20 - 30 A	10
	66 Series	Power relays 30 A	11
	67 Series	High Power relays for pv applications 50 A	11
	68 Series	High Power relays 32 - 40 - 100 A	12
	RB Series	Bistable relays 8 A	13
	RR Series	Fast relay module 8 A	13
	6K Series	Industrial contactors	14
		Socket-Relay compatibility	16
	99 Series	Coil indication and EMC suppression modules for sockets	18
RELAY INTERFACE MODULES (EMR OR SSR)	38 Series	Relay interface modules (EMR or SSR) 0.1 - 2 - 3 - 5 - 6 - 8 - 16 A	19
	39 Series	MasterINTERFACE - Relay interface modules (EMR or SSR) 0.1 - 2 - 6 A	19
	48 Series	Relay interface modules 8 - 10 - 16 A	20
	4C Series	Relay interface modules 8 - 10 - 16 A (relay with: lockable test button, mechanical indicator & LED indicator)	20
	58 Series	Relay interface modules 6 - 7 - 10 A	21
RELAYS WITH FORCIBLY GUIDED CONTACTS	50 Series	PCB relays with forcibly guided contacts 8 A	22
	7S Series	Modular relays with forcibly guided contacts 6 - 10 A	23
SOLID STATE RELAYS (SSR)	77 Series	Solid State Relays (SSR) 5 - 15 - 30 - 50 A	24
MONITORING RELAYS	70 Series	Electronic Monitoring voltage/current relays	26
	72 Series	Level control relays for conductive liquids	27
POWER ANALYZER ENERGY METER	6M Series	Power analyzer	30
	7E Series	Energy meters for CT use	31
	7M Series	SMART Energy meters with NFC technology	32
SPD	7P Series	Surge protection devices (SPD)	33
SWITCH MODE POWER SUPPLIES	78 Series	Switch mode power supplies	36
INDUSTRIAL THERMOREGULATION AND ACCESSORIES	7T Series	Panel Thermo-Hygrostat and Thermostats	40
	7F Series	Filter Fan (24...700)m³/h and Exhaust Filter	41
	7H Series	Panel Heaters 25 - 50 - 100 - 150 - 250 - 400 W	42
	7L Series	LED panel light	43
	7U Series	Power outlets for electrical enclosures	44
	9D Series	High Current Terminal Blocks	45
TIMERS	80 Series	Multi-function Modular timers, 17.5 mm wide 1 - 6 - 8 - 16 A	46
	81 Series	Modular timer with Start and Reset function 16 A	47
	83 Series	Multi-function Modular timers, 22.5 mm wide 8 - 12 - 16 A	48
	84 Series	SMARTimer, digital timer 16 A	49
	85 Series	Miniature plug-in timers 7 - 10 A	49
	86 Series	Timer modules	50
	88 Series	Plug-in or panel mount timers	50
		Socket-Timer compatibility	51



opta.findernet.com

Easily create industrial, OEM and building automation programs with OPTA PLRs using traditional IEC 61131-3 languages (LADDER, FBD, etc.) with either CODESYS or ARDUINO PLC IDE.



(according to type)



- Supply 12...24 V DC
- 8 Digital/Analog (0-10 V) inputs
- 4 NO relay output contacts, rated 10 A
- Each individual PLR can manage up to 5 expansion modules
- USB (type C) High Speed port for:
 - Programming
 - Power during programming
- RJ45 for Ethernet connections or MODBUS TCP/IP
- RS485 Port for MODBUS RTU connection



Type 8A.04.9.024.832C



- Supply 12...24 V DC
- 8 Digital/Analog (0-10 V) inputs
- 4 NO relay output contacts, rated 10 A
- Each individual PLR can manage up to 5 expansion modules
- USB (type C) High Speed port for:
 - Programming
 - Power during programming
 - Data logging (via memory stick)

OPTA LITE

RJ45 + USB C



Type 8A.04.9.024.8300

OPTA PLUS

+ RS485



Type 8A.04.9.024.8310

OPTA ADVANCED

+ Wi-Fi and BLE



Type 8A.04.9.024.8320

Low profile
switch mode
power supplies
with DC output



78 Series
See the technical
data sheet



Type 78.12.1.230.2482

Up to 1 OPTA and
5 expansion modules

- Output:
24 V DC - 0.5 A, 12 W
- Peak current: 2 A



Type 78.25.1.230.2482

Up to 2 groups of 1 OPTA
and 5 expansion modules

- Output:
24 V DC - 1 A, 25 W
- Peak current: 3 A

The OPTA expansions are designed to add inputs / outputs to the system, with a maximum of five expansion modules per OPTA.
Connection is via the OPTA AUX auxiliary port.

+ INPUTS

A maximum of 80 with the digital version and 30 for the analogue version

+ OUTPUTS

Up to 40 for the digital version and 30 for the analogue version

EMR	SSR	ANALOG
16 digital/analog (0...10 V) inputs	16 digital/analog (0...10 V) inputs	6 analog (0...10 V, 4...20 mA, PT 100 2-3 wires) inputs - programmable up to 8
8 EMR 6 A outputs	8 SSR 3 A outputs up to 50 A - 5 ms	2 analog (0...10 V, 4...20 mA) outputs - programmable up to 8
—	—	4 PWM outputs
Nominal voltage 12...24 V DC	Nominal voltage 12...24 V DC	Nominal voltage 12...24 V DC



Type 8A.58.9.024.160C



Type 8A.88.9.024.160C



Type 8A.26.9.024.060C



Type 8A.58.9.024.1600



Type 8A.88.9.024.1600



Type 8A.26.9.024.0600

CE UK EAC 15 cULus LISTED (according to type)

Auxiliary port for connecting EXPANSION MODULES to the CPU



8A Series
See the technical data sheet

30 SERIES

Subminiature DIL relays 2 A



→ **Very low coil consumption - 200 mW**

- Very Small
- 2 contacts 2 A
- For the control of low level loads
- Au clad contacts
- Printed circuit mount



30 Series
See the technical data sheet

32 SERIES

Subminiature PCB relays 6 A



→ **Very low coil consumption - 200 mW**

- Very Small
- 1 Pole changeover contact or 1 Pole normally open contact 6 A
- Subminiature, low profile package



32 Series
See the technical data sheet

Approvals (according to type)



Used mainly for electronic circuit boards in signal transmission devices, telecoms, and small household appliances.

34 SERIES

Ultra-slim PCB Relays (EMR or SSR) 0.1 – 0.2 – 2 – 6 A



→ Ultra slim (5 mm) package

- 1 Pole changeover contact or 1 Pole normally open contact
- Very low coil consumption - 170 mW
- UL Listing (certain relay/socket combinations)
- PCB or 93 Series socket mount
(according to type - page 18)



34 Series
See the technical data sheet

36 SERIES

Miniature PCB relays 10 A



→ Miniature - "Sugar cube" package

- 1 Pole changeover contact 10 A
- Very low coil consumption - 360 mW



36 Series
See the technical data sheet

Approvals (according to type)



34 Series: used mainly for circuit boards within equipment such as vending machines, programmable controllers.
36 Series: widely used in household appliances.

40 SERIES

Miniature PCB Relays or socket mount 8 - 10 - 12 - 16 A



→ AC coils and DC coils (low coil consumption)

- 1 or 2 contacts
- Pin length 3.5 mm for PCB mount
- Pin length 5.3 mm for 95 Series sockets Plug-in mount
- Meets EN 60335-1 glow wire requirements
- Bistable versions available
- PCB or 95 Series socket mount
(according to type - page 18)



40 Series
See the technical data sheet

41 SERIES

Low profile PCB relays (EMR or SSR) 3 - 5 - 8 - 12 - 16 A



→ Low profile (15.7 mm high)

- 1 or 2 contacts
- AC coils and DC coils
- Low coil consumption
- SSR versions available - Silent, high speed switching with long electrical life
- PCB or 93 Series socket mount
(according to type - page 18)



→ Special versions for hazardous locations (ATEX, HazLoc, IECEx)

IECEx - ATEX certification: II 3 G Ex nC IIC Gc

HazLoc certification: Class I, Zone 2, AEx nC IIC Gc

Class I Div. 2, Gruppi A, B, C, D - T4



41 Series
See the technical data sheet

Approvals (according to type)



Multi-function, suitable for a wide range of applications.

Due to their versatility they are widely used in electronic circuit boards for household appliances (refrigerators, washing machines), electric gates, boiler control boards and similar.

43 SERIES

Low profile PCB relays 10 - 16 A



→ Low coil consumption

- Low profile (15.4 mm high)
- 1 Pole changeover contact or 1 Pole normally open contact
- DC coil
- PCB or 95 Series sockets mount (according to type - page 18)



43 Series
See the technical data sheet

45 SERIES

Miniature PCB Relays + Faston 250, 10 - 16 A



→ Relay for +105 °C or 125°C ambient use

- 1 normally open contact
- Large contact gap
- DC coil
- Conform to Annex CC EN 61439-7:2018 for EV charging station



45 Series
See the technical data sheet

Approvals (according to type)



Household appliances, food industry, drying kilns.
45 Series: for photovoltaic inverters and charging station.

46 SERIES

Miniature industrial relays 8 – 16 A



→ **Available with: lockable test button, mechanical indicator & LED indicator**

- Power relays, 1 - 2 contacts
- AC coils and DC coils
- Optional alternative mounting adaptors
- PCB mount sockets or 35 mm rail (EN 60715) mount sockets, (according to type - page 18)



46 Series
See the technical data sheet



European Patent
(according to type)

55 SERIES

General purpose relays 7 – 10 A



→ **2 - 3 - 4 changeover contacts**

- Compact dimensions
- AC coils and DC coils
- Optional alternative mounting adaptors
- PCB or 94 Series socket mount (according to type - page 18)




55 Series
See the technical data sheet



European Patent
(according to type)

Approvals (according to type)



General switchboard installations, industrial automation panels, auxiliary relays, interfacing.

Special versions for railway applications.

Miniature power relays 12 A



→ 2 - 4 Pole changeover contacts 12 A

- AC coils and DC coils
- Lockable test button and mechanical indicator
- Optional alternative mounting adaptors
- PCB or 96 Series socket mount
(according to type - page 19)



56 Series
See the technical data sheet



European Patent
(according to type)

Industrial relays 6 - 10 A



→ 8 pin plug-in and 11 pin plug-in versions

- 2 - 3 Pole changeover contacts
- Bifurcated contacts for low level switching
- AC coils and DC coils
- Lockable test button with mechanical flag indicator (preferred version)
- PCB or 90 Series socket mount
(according to type - page 19)



60 Series
See the technical data sheet



European Patent
(according to type)

Approvals (according to type)



General switchboard installations, industrial automation panels, auxiliary relays, interfacing.

Special versions for railway applications.

66 SERIES Power relays 30 A



- **Certification by ATEX accredited body to (EX ec nC) EN IEC 60079-15: 2019**
- **Complies with HazLoc Class I Div. 2, Groups A, B, C, D - T4 - T5 - T6**
 - 2 Pole changeover contacts or 2 normally open contacts 30 A
 - AC coils and DC coils
 - PCB mount - bifurcated terminals, flange mount, Faston 250 connections



66 Series
See the technical data sheet

67 SERIES High Power relays 50 A



- **2 - 3 normally open contacts 50 A**
 - DC coils, with only 170 mW holding power
 - Suitable for use at ambient temperatures up to 85 °C (with energy-saving coil energization) or 70 °C (with standard coil energization)
 - Meets the EN 60335-1 requirements of resistance to heat and fire (GWIT 775 °C and GWFI 850 °C)
 - Printed circuit mount



67 Series
See the technical data sheet

Approvals (according to type)



Installations where the disconnection of electrical power is critically important (electronic power boards, inverters, photovoltaic (PV) systems) or ATEX applications, where the environment is at risk of explosion (LPG storage, underground garage, fuel stations).

68 SERIES High Power relays 32 – 40 – 100 A



68 Series
See the technical
data sheet

- 2 NO (DPST-NO) 100 A
or 2 NO (DPST-NO) 100 A + 1 NC (SPST-NC) 3 A (feedback contact)
- 4 NO (4PST-NO) 40 A
or 4 NO (4PST-NO) + 1 NC (SPST-NC) 3 A (feedback contact)
- 4 NO (4PST-NO) 32 A
or 4 NO (4PST-NO) + 1 NC (SPST-NC) 3 A (feedback contact)*
 - Meets EN 60335-1 requirements for resistance to heat and fire (GWIT 775°C and GWFI 850°C)
 - DC coils, with only 700 mW holding power
 - Suitable for use at ambient temperatures up to 85 °C
 - Mirror contact (type 68.23) according to EN 60947-4-1 Annex F
 - Printed circuit mount



68.22



68.55



Approvals (according to type)



* Complies with IEC 62955 for electric vehicle charging stations.

Inverters, photovoltaic inverters, battery chargers and high power switching applications.

RB SERIES Bistable relays 8 A



→ SET and RESET signal inputs

- 2 or 4 pole changeover contacts 8 A
- DC coils
- LED command status indication
- 35 mm rail (EN 60715) mount or 90 Series socket mount



RB Series
See the technical data sheet

RR SERIES Fast relay module 8 A



→ Operate time ≤ 3 ms

- 4 pole changeover or 3 normally open + 1 changeover contacts 8 A
- DC coils
- LED command status indication
- 35 mm rail (EN 60715) mount or 90 Series socket mount



RR Series
See the technical data sheet

Approvals (according to type)



Used within safety and protection systems in areas such as energy distribution, or in applications where the intervention time is crucially important.





6K SERIES Industrial contactors

Space Saving Size with Maximum Performance.



6K Series
See the technical
data sheet

- From 4 to 37 kW
- From 9 to 74 A, AC3 – 400 V AC
- Complies with EN 60947 / IEC 947
- AgSnO₂ contact material
 - Various contact configurations available
 - Working temperature: -40°C...+ 90°C (with coil voltage derating @90°C)
 - Auxiliary block contacts available, 2 A (AC15 – 400 V)
 - 35 mm Din rail mounting

 	Type 6K.04.x.xxx.4x09 - 3 normally open contacts, 9 A (AC3) + 1 auxiliary contact 2 A (AC15) - 4 normally open contacts, 9 A (AC3) - Nominal voltage: 24 - 48 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC	Type 6K.04.x.xxx.4x12 - 3 normally open contacts, 12 A (AC3) + 1 auxiliary contact 2 A (AC15) - 4 normally open contacts, 12 A (AC3) - Nominal voltage: 24 - 48 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC
 	Type 6K.14.x.xxx.4x10 - 3 normally open contacts, 10 A (AC3) + 1 auxiliary contact 2 A (AC15) - 4 normally open contacts, 10 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC	Type 6K.14.x.xxx.4x18 - 3 normally open contacts, 18 A (AC3) + 1 auxiliary contact 2 A (AC15) - 4 normally open contacts, 18 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC
 	Type 6K.13.x.xxx.4324 - 3 normally open contacts, 24 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC	Type 6K.13.x.xxx.4332 - 3 normally open contacts, 32 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC 12 - 24 - 48 - 60 - 72 - 110 V DC
 	Type 6K.13.8.xxx.4350 - 3 normally open contacts, 50 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC	Type 6K.13.8.xxx.4374 - 3 normally open contacts, 74 A (AC3) - Nominal voltage: 24 - 110 - 230 V AC

Auxiliary modules

Mechanically linked contacts according to EN 60947-5-1, IEC 947-5-1

for Type 6K.04



Type 06K.03

1 normally open contact
+ 1 normally closed contact 2 A

Type 06K.06

2 normally open contacts
+ 2 normally closed contacts 2 A

(AC15 – 400 V)

for Type 6K.14 and 6K.13



Type 06K.11

1 normally open
contact 2 A

(AC15 – 400 V)



Type 06K.12

1 normally closed
contact 2 A

(AC15 – 400 V)

6K SERIES Thermal overload protection



6K Series
See the technical
data sheet

- Thermal overload protection for contactors Type 6K.04, 6K.14 and 6K.13
- Thermal overload protection from 1.8 A up to 24 A
- Automatic or manual intervention reset button
 - Trip class according to IEC 947-4-1: 10 A
 - Adjustable threshold
 - Stop button
 - Terminal for auxiliary contact
 - AgNi contact material



Type 6K.T0.0.000.xxxx
for contactor 6K.04

- 3 normally open contacts
- 1 auxiliary normally open contact
- 1 auxiliary normally closed contact



Type 6K.T1.0.000.xxxx
for contactor 6K.14 and 6K.13

- 3 normally open contacts + AUX contact
- 1 auxiliary normally open contact
- 1 auxiliary normally closed contact
- Automatic or manual intervention reset button
- Pin gap adjustable for using 6K.13 or 6K.14

RC units

for Type 6K.04

Type 06K.R0.0.xxx

Nominal voltage:
12...48 V AC/DC
48...127 V AC/DC
110...230 V AC/DC



for Type 6K.14 and 6K.13

Type 06K.R1.0.xxx

Nominal voltage:
12...48 V AC/DC
48...127 V AC/DC
110...230 V AC/DC



Approvals (according to type)



Space Saving Size with Maximum Performance.

Possible connection of front auxiliary modules from 1 to 4 poles in various configurations.

Socket-Relay compatibility

For all these sockets there are a number of accessories available, such as jumper links for faster connection clips and marker tag holders.



34 Series



93 Series



Box clamp



Push-in terminals



Screwless terminals



40 Series



95 Series



Box clamp



Push-in terminals



Screwless terminals



Seria 41



Seria 95



Box clamp



Screwless terminals



43 Series



Type 95.23



PCB



46 Series



97 Series



Box clamp



Push-in terminals

Socket-Relay compatibility

For all these sockets there are a number of accessories available, such as jumper links for faster connection clips and marker tag holders.



55 Series



94 Series



Box clamp



Push-in
terminals



Screwless
terminals



56 Series




96 Series



Box clamp



60 Series

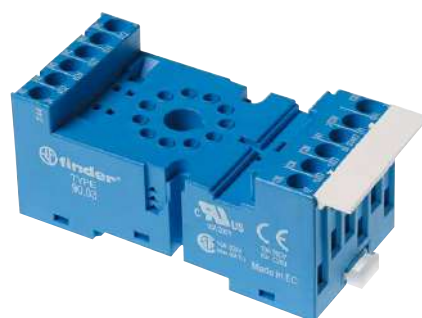

90 Series



Box clamp



62 Series



92 Series



Box clamp

99 SERIES


Coil indication and EMC suppression modules for sockets



These modules when be plugged into the appropriate socket can suppress coil generated back-emf (diode or varistor), provide visual signaling (coil energized LED) or can filter out possible mains disturbances (RC filters).

Diagrams	Code	Functions
	99.02.9.024.99 99.02.9.060.99 99.02.9.220.99	Green LED + diode module (standard polarity) ATEX compliant (Ex ec) To be used with 58 ATEX interface
	99.02.0.024.98 99.02.0.060.98 99.02.0.230.98	Green LED indicator + Varistor ATEX compliant (Ex ec) To be used with 58 ATEX interface
	99.02.0.024.59 99.02.0.060.59 99.02.0.230.59	Green LED indicator ATEX compliant (Ex ec) To be used with 58 ATEX interface
	99.02.3.000.00	Diode module (standard polarity)
	99.02.0.024.09 99.02.0.060.09 99.02.0.230.09	RC module
	99.02.8.230.07	Residual current bypass module

Approvals (according to type)



38 SERIES

Relay interface modules (EMR or SSR) 0.1 - 2 - 3 - 5 - 6 - 8 - 16 A



→ "Ultra-slim" interface modules, just 6.2 mm wide only

- 1 or 2 changeover contacts or 1 normally open contact
- Sensitive DC coils or AC/DC coils versions
- Quick and easy ejection of relay using plastic retaining clip
- Timed multifunction version with electromechanical or solid state relay output
- UL Listing (certain relay/socket combinations)
- Box clamp and screwless terminal sockets



38 Series
See the technical data sheet

39 SERIES

MasterINTERFACE Relay interface modules (EMR or SSR) 0.1 - 2 - 6 A



→ "Ultra-slim" interface modules, just 6.2 mm wide only

→ Atex and HazLoc compliant versions available

→ The most complete range of accessories

- 1 or 2 changeover contacts or 1 normally open contact
- AC coils and DC coils
- Quick and easy ejection of relay using plastic retaining clip
- Versions taking fuse holder module for protection of the output circuit
- Timed multifunction version with electromechanical or solid state relay output
- Common connection possible with optional 16-way jumper links (terminals A1, A2 and 11)
- UL Listing (certain relay/socket combinations)
- Box clamp and push-in terminal sockets



39 Series
See the technical data sheet



Approvals (according to type)



Interfacing in general, widely used in automation with PLC and in applications where space saving is important.

ATEX and HAZLOC applications: LPG storage areas, underground garages, gas stations.

48 SERIES Relay interface modules

8 - 10 - 16 A



→ Safety applications: relay with forcibly guided contacts according to EN 61810-3 Type B (previously EN 50205)

- 1 or 2 pole changeover contacts
- AC coils or DC coils
- 15.8 mm wide
- Supply status indication and EMC coil suppression module as standard
- Quick and easy ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- Box clamp and push-in terminal sockets



48 Series
See the technical data sheet

4C SERIES Relay interface modules

8 - 10 - 16 A



→ Relay with: lockable test button, mechanical indicator & LED indicator

- 1 or 2 pole changeover contacts
- AC coils or DC coils
- 15.8 mm wide
- Supply status indication and EMC coil suppression module as standard
- Quick and easy ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- Box clamp and push-in terminal sockets



4C Series
See the technical data sheet

Approvals (according to type)




Per schede elettroniche di apparati di trasmissione segnali e telefonia, piccoli elettrodomestici

58 SERIES


Relay interface modules

6 - 7 - 10 A

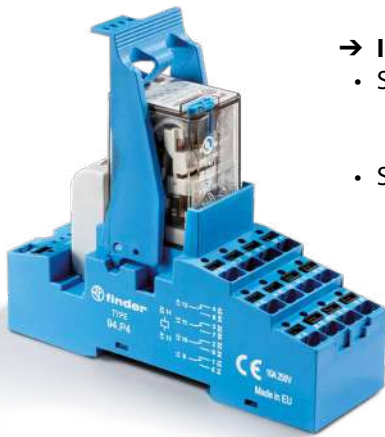

→ Ideal interface for PLC and electronic systems

- Socket with box clamp: 58.32 - 2 CO 10 A
53.33 - 3 CO 10 A
58.34 - 4 CO 7 A
- Socket with Push-in terminals: 53.P3 - 3 CO 10 A
58.P4 - 4 CO 7 A

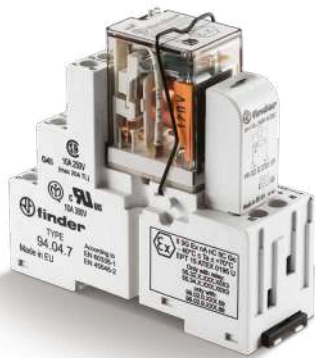

→ Special versions for hazardous locations (ATEX, HazLoc, IECEx)

IECEx - ATEX certification: II 3G Ex ec nC IIC Gc

HazLoc certification: Class I Div. 2 Groups A, B, C, D - T5

→ Complies with: EN 60079-0:2012+A11:2013; EN 60079-15:2010; EN 60079-7:2015 e 2014/34/UE

- Socket with box clamp: 58.32-x0xx - 2 CO 10 A
58.34-x0xx - 4 CO 6 A
- Socket with Push-in terminals: 53.P3 - 3 CO 8.5 A
58.P4 - 4 CO 6 A



- AC coil or DC coil
- 27 mm wide
- Supply status indication and EMC coil suppression module as standard
- UL Listing (certain relay/socket combinations)



58 Series
See the technical data sheet

Approvals (according to type)



Interfacing in general, widely used in panel building, and in applications where 3 or 4 contacts are required.
Industrial automation control panels, power plants, home automation, etc...
ATEX and HAZLOC applications: LPG deposits, underground garages, gas stations.

50 SERIES

PCB Relay with forcibly guided contacts 8 A



50 Series
See the technical
data sheet

→ Relay with forcibly guided contacts according to EN 61810-3
(previously EN 50205) for safety applications


→ Bobina in DC a basso assorbimento

- Contact configuration (according to type):
2 changeover contacts 8 A
4 pole: 2 NO + 2 NC, 3 NO + 1 NC
6 pole: 4 NO + 2 NC, 5 NO + 1 NC, 3 NO + 3 NC
- High physical separation between adjacent contacts
- PCB mount

50.12





A1 12 11 14






A2 22 21 24

2 changeover contacts

50.14

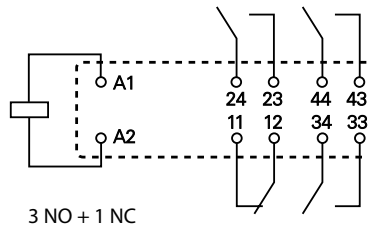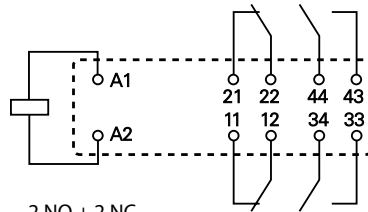

50.16

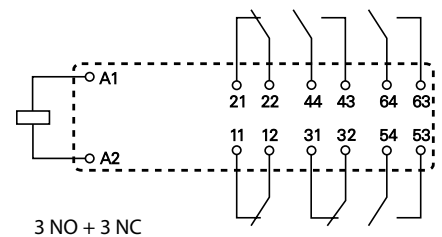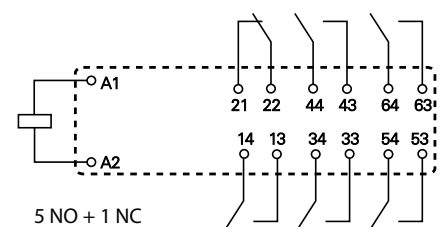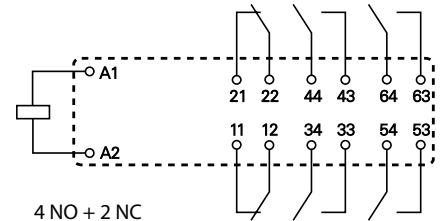

Approvals (according to type)



Machine tools, elevators, safety barriers.

7S SERIES

Modular relays with forcibly guided contacts 6 - 10 A



7S Series

See the technical data sheet

→ Relay with forcibly guided contacts according to EN 61810-3 (previously EN 50205) for safety applications

- Modular electromechanical relays with 2 - 3 - 4 or 6 forcibly guided contacts
- AC coils or DC coils
- Coil status visual indication with LED
- 17.5 mm or 22.5 mm wide
- Box clamp or screwless terminals
- 35 mm rail (EN 60715) mount

SIL2

Assessed to EN 61508 for functional safety in applications up to SIL2 according to EN 62061, and for functional safety in applications up to PL d according to EN 13849-1.

SIL3

Assessed to EN 61508 for functional safety in applications up to SIL3 according to EN 62061, and for applications up to PL e according to EN 13849-1. System with dual channel architecture (1oo2) with two NO contacts, 1 feedback contact and 1 auxiliary contact.



7S.12

7S.14

7S.34

7S.23

7S.43

7S.12/ 7S.32	7S.14/34...4220	7S.14...4310	7S.16/36...5420	7S.16/36...5510	7S.23	7S.43/63

Approvals (according to type)



For safety applications up to SIL 2 or SIL 3 according to IEC 61508 (according to type).
Machine tools, elevators, safety barriers and expansion modules.

Special versions for railway applications.

77 SERIES Solid State Relays (SSR)



77.01

Modular version, 5 - 15 - 25 - 30 A

→ DC output with short circuit protection

- 1 normally open contact AC output
- 17.5 mm or 22.5 mm wide, heat-sink + plastic cover
- Zero-crossing and random switch-on versions available
- Silent switching, arc and bounce-free switching
- Low control power



77 Series
See the technical data sheet

Solid State Relay "Hockey puck" case from 25 to 125 A
for single phase application, dual phase with 2 independent channel
and for three phase system.

Heat sink and Thermal pad for relays (SSR) available.



77.x1

- Single phase SSR with SCR power output device
- Nominal switching (load) current: 25, 40, 60, 80, 100, 125 A
- Rated voltage (load): 230 or 600 V AC
- Zero Crossing switching mode
- Nominal coil voltage: 24 V DC or 230 V AC
- Dielectric strength: 4000 V AC



77.x2

- Dual phase SSR with 2 independent channels
- Dual SCR power output
- Nominal switching (load) current: 25, 50, 75 A
- Rated voltage (load): 600 V AC
- Random switching mode
- Nominal coil voltage: 24 V DC
- Dielectric strength: 4000 V AC



77.x3

- Three phase SSR with SCR output power device
- Nominal switching (load) current: 25, 40, 60, 80 A
- Rated voltage (load): 600 V AC
- Random switching mode
- Nominal coil voltage: 24 V DC or 230 V AC
- Dielectric strength: 4000 V AC






Approvals (according to type)



Particularly suitable for resistive loads and for industrial applications with high switching rate and loads with high inrush currents.

"Zero crossing": for switching low-energy lamps (in particular for compact low-energy lamps - CFL), resistive loads, solenoids, contactor coils.

"Random switch-on version": for fast switching applications (in particular motor loads), circuits where the input phase is different from the output phase, and for three-phase loads.

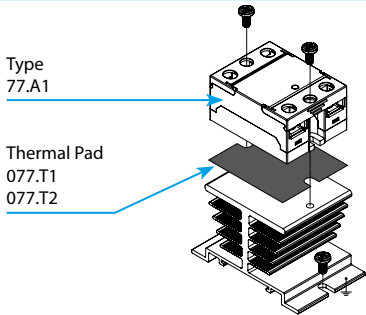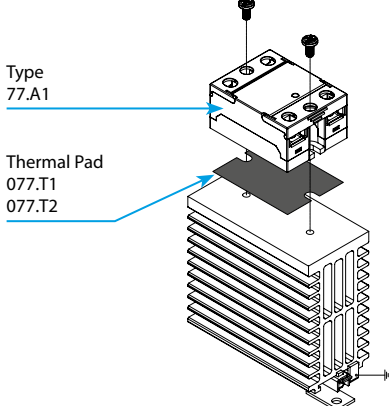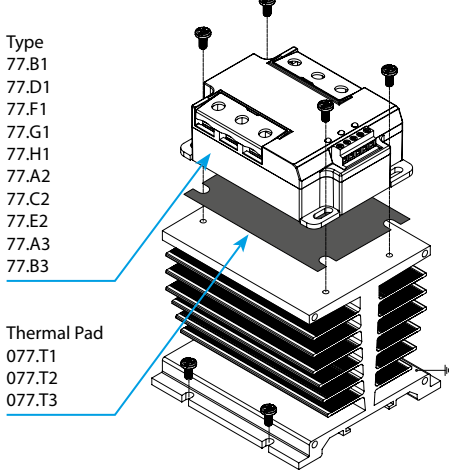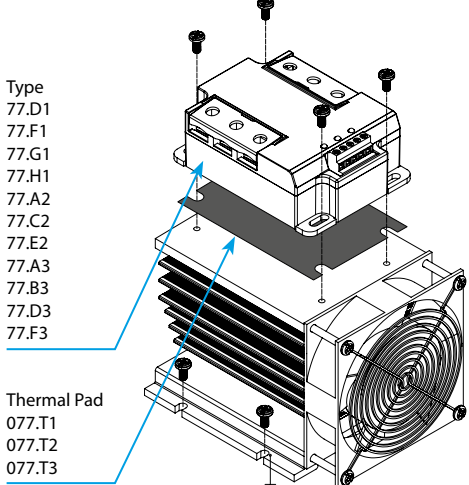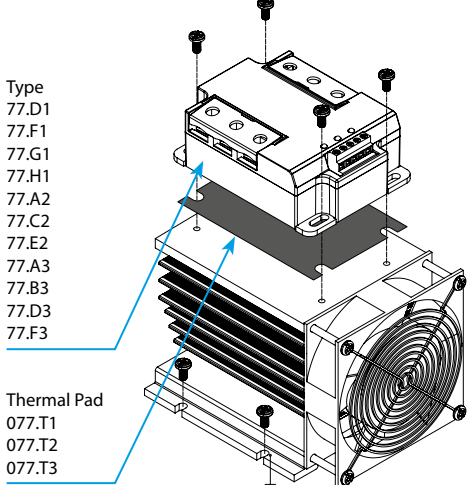Heat sink	SSR relay	Thermal pad	Product Description	Heat sink and Thermal Pad for SSR Relays - "hockey puck"
077.21 	77.A1	077.T1  077.T2 - Adhesive 	Heat sink SSR 1 phase	 Type 77.A1 Thermal Pad 077.T1 077.T2
077.13 	77.A1 77.B1	077.T1  077.T2 - Adhesive 	Heat sink SSR 1 phase	 Type 77.A1 Thermal Pad 077.T1 077.T2
077.08 	77.B1 77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3	077.T1  077.T2 - Adhesive  077.T3 	Heat sink SSR 1, 2, 3 phases	 Type 77.B1 77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3 Thermal Pad 077.T1 077.T2 077.T3
077.03.9.024 	77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3 77.D3 77.F3	077.T1  077.T2 - Adhesive  077.T3 	Heat sink with 24 V DC - 5.5 W cooling fan Suitable for SSR 1, 2, 3 phases	 Type 77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3 77.D3 77.F3 Thermal Pad 077.T1 077.T2 077.T3
077.03.8.230 	77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3 77.D3 77.F3	077.T1  077.T2 - Adhesive  077.T3 	Heat sink with 230 V AC - 14.5 W cooling fan Suitable for SSR 1, 2, 3 phases	 Type 77.D1 77.F1 77.G1 77.H1 77.A2 77.C2 77.E2 77.A3 77.B3 77.D3 77.F3 Thermal Pad 077.T1 077.T2 077.T3

70 SERIES Monitoring relays



70 Series
See the technical
data sheet

- **Multifunction models able to monitor and control the characteristic variables of single-phase and three-phase electrical systems**
- **Positive safety logic**
 - 1 or 2 changeover contacts
 - Colored LEDs for clear & immediate visual indication
 - NFC version
 - Modular, 17.5, 22.5 or 35 mm wide
 - 35 mm rail (EN 60715) mount



70.11



70.42



70.51



70.51.0.240.N032
Programmable
via Finder
Toolbox app



70.92

Thermistor temperature sensing relays

- 2 CO (DPDT) 8 A
- Temperature detection with PTC
- PTC short circuit detection
- PTC wire breakage detection
- Fault memory selectable
- 6 functions
- RESET delay time (0.5s or 3s) selectable
- RESET terminals
- 22.5 mm wide

Approvals (according to type)



This product range is ideal for voltage control in equipment and machinery such as motors, lifts, elevators, hydraulic pumps, air-conditioning systems and air treatment machines.

72 SERIES

Level control relays for conductive liquids



72 Series
See the technical
data sheet

Wide range of accessories available.

- **Multifunction versions**
- **Type 72.01 and 72.11: electrode type liquid level controllers**
- **Type 72.42: priority change relay for alternating loads**
 - LED indicator
 - Control about a single level or between Min./Max. limits (72.01/72.11)
 - Emptying or filling functions
 - Complex load control to account for issues such as redundancy, maintenance, intervention of external override signals
 - Reinforced insulation (6 kV - 1.2/50 μ s) between: supply and contacts, electrodes and supply, contacts and electrodes
 - Modular, 35 mm wide



72.01



72.42



72.51

- **Powerful performance in a single module (17.5 mm wide)**
 - Emptying or filling functions (6 functions: FL, FS, ES, EL, WL, WS):
 - Control about a single level, between Min./Max. limits or Window mode
 - Adjustable sensitivity (5...150) k Ω or (5...450)k Ω
 - Delay time (0.5 s or 7 s) selectable
 - Double LED indicator: power supply ON and indication of output status
 - Reinforced insulation (6 kV - 1.2/50 μ s) between:
 - supply and contacts
 - electrodes and supply
 - contacts and electrodes
 - Contact configuration: 1 CO (SPDT), 6A

Approvals (according to type)



Type 72.01, 72.11 and 72.51: level control of conductive liquids using electrodes.
Type 72.42 is ideal for alternating load sharing in applications with pumps, compressors, air conditioning and refrigeration units.

72 SERIES

Accessories for 72.01, 72.11 and 72.51 (according to type)

A wide range of sensors make the Level Control Relays ideal for different applications.

Normally, 2 sensors are used to control to a single level, or 3 sensors are used to control between "Minimum" and "Maximum" levels.

If the tank is made of conductive material, it can be used directly as the "common" connection to B3.

If you have to control to two different levels in the same tank, simply use 2 relays.



Type 072.01

for liquid foodstuff

Type 072.02

for liquids with high chlorine content (swimming pools)

Pre-wired cable-sensor with cable length 6 or 15 m (1.5 mm²), suitable for level monitoring in food applications or where there are high levels of chlorine, in wells and reservoirs not under pressure.



Type 072.51

Bipolar electrode holder, suitable for metal tanks with G3/8" coupling. The tank can be used as ground via the coupling by connecting it directly to the screw terminal (B3) of the relays 72.01/11.

The total length of the probe is obtained by interconnecting multiple 072.500 electrodes.

Maximum liquid temperature 100°C.

High-quality electrode material: stainless steel (AISI 304) for high corrosion resistance.



Type 072.41

One-pole sensor for wells and tanks. Maximum liquid temperature 80°C.

High-quality electrode material: stainless steel (AISI 316L) with high corrosion resistance.

Made of polypropylene for resistance to aqueous solutions of inorganic salts, acids, alkaline solutions, alcohol, some oils and washing solutions.

Physiologically harmless, it is therefore especially suitable for use in the food and pharmaceutical industries.



Type 072.53

Three-pole electrode holder for wells and tanks.

The total length of the sensor is obtained by interconnecting multiple electrodes 072.500.

Maximum liquid temperature 70°C.

High quality electrode material: stainless steel (AISI 303) for high corrosion resistance.



Type 072.11

Flood sensor, ideal for detecting floor surface water and condensation (for example in refrigerator aisles).



Type 072.503

Electrode separator - for use with the 072.53 holder and 072.500 electrodes.

Maintains the safe separation of the electrodes - preventing them inadvertently touching each other.



Type 072.500

Electrode - 475 mm long, M4 thread, stainless steel (AISI 316L)

Electrode and electrode connector, multiple electrodes may be interconnected to provide required length

Type 072.501

Inter-electrode connector - M4 thread, stainless steel (AISI 316L)

72 SERIES

Float switch suitable for fluid level regulation



72 Series
See the technical
data sheet

- **Suitable for emptying and filling**
- **Cable and plastic EPDM and H05 RN F certified version**
 - 1 changeover contact 10 A (resistive load) / 8 A (inductive load)
 - Space saving version
 - Cable length 5 m, 10 m, 15 m or 20 m
 - Type 72.C1: Manual switch for automatic (ON/OFF) or manual (always ON) operation, cable length 2 m



72.A1.1000.xx02
Cable material EPDM



72.A1.1000.xx01
H05 RN F cable approved TÜV



72.B1.1000.xx01
H05 RN F cable approved TÜV



72.C1.0000.0201
H05 RN F cable
approved TÜV

Approvals (according to type)

CE UK EAC Δ ACS

Type 72.A1.1000.xx01: for grey water, professional plumbing systems and waste water.
Type 72.A1.1000.xx02: for swimming pools with high levels of chlorine, or in salt-water pools with high levels of salinity. Cable and plastics ACS certified for alimentary uses.
Type 72.B1.1000.xx01: for black water systems, drainage plants and pumping stations.
Type 72.C1.0000.0201: space saving, clean or waste water wells, industrial and chemical waters.

6M SERIES Power analyzer products

Type 6M.Tx - Single phase Modbus quality power Monitors.



6M Series
See the technical
data sheet

- **"All-in-one": CT, Power/Energy meter and Supply quality monitor + Modbus communications**
- **True-RMS AC and DC measurements**
 - Accuracy class: 0.5% F.S.
 - Up to 300 A - 800 V AC
up to 400 A - 1000 V DC measurement
 - Bi-directional active energy measurement kWh
 - Working frequency: DC or 1...400 Hz
 - Fully configurable via Modbus RS485 interface (free software)
 - DIN rail mounting (with DIN rail adaptor included)



6M.TA.9.024.1200

50 A - 800 V AC/1000 V DC


6M.TB.9.024.1200

100 A - 800 V AC/1000 V DC



6M.TF.9.024.1200

300 A - 800 V AC,
400 A - 1000 V DC

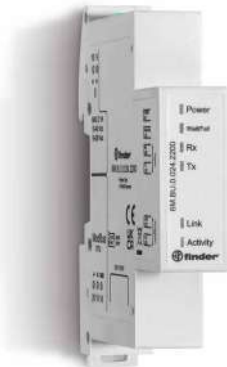

Type 6M.BU.0.024.2200 - Modbus RS485 RTU
Modbus TCP/IP Gateway with on board web server interface

- **Ethernet com port: 10/100 Mb/s (Max 10 Clients)**
- **Modbus RTU com port: RS485 up to 115.200 bit/s (Max 200 slaves)**
 - User interface: 6 LED
 - Insulation between power supply, RS485, Ethernet: 1500 V
 - DIN rail mounting

Approvals (according to type)



Charging Stations, energy management, inverters, industrial automation, panels for electrical distribution, PV applications.

7E SERIES Energy meters for CT use (indirect connection)



7E Series
See the technical
data sheet

- **Energy meters for CT use**
- **Bi-directional energy meters (import and export energy)**
- **MID certified Class C, 70°C**
 - Measure: kWh, Kvarh, KW, Kvar, KVA, P, f, PF, V, A, THD, etc.
 - 2 impulsive S0 output, 1 fixed, 1 programmable
 - 4 touch buttons
 - Single or dual tariff available
 - RS485 Modbus or M-Bus integrated interface
 - Three-phase systems programmable 3 or 4 wire
 - Usable with current transformer up to 10.000 A



7E.85.8.400.021x

Reference current 1 A (6 A Maximum)
RS485 Modbus integrated interface



7E.85.8.400.031x

Reference current 1 A (6 A Maximum)
M-Bus integrated interface

Approvals (according to type)



Energy meters ideal for remote monitoring and measurement of energy consumption in industrial or big production plant, up to 10.000 A with external current transformer.

7M SERIES SMART Energy meters with NFC technology

Control, measurement and data transmission via pulse communication interface, Mbus or Modbus (according to type).



7M Series
See the technical
data sheet

→ MID certified, according to type, up to 70°C

- Bidirectional energy meters for measuring kWh, kvarh, kVAh, voltage and current, phase, line-to-line voltage, frequency, cosφ and THD
- Equipped with double tariff and re-settable partial counters
- Modbus RS485, M-bus or Ethernet communication port incorporated into the meter
- Modular, 17.5 or 52.5 mm wide, 35 mm rail (EN 60715) mount

→ With the last update of Toolbox App and thanks to the NFC technology is possible to:

- to monitor the trend of energy consumption
- to program and customize the counters 7M
- store and share programs
- to read the energy meter without the presence of the supply network
- send to your mail address a CSV file to create graph and analyse the power consumption with your PC
- name the meter to easy recognize it and the energy measured (eg. meter for Mr Finder's car box)
- no annual fee to store your data



Toolbox



7M.24

NFC - Modbus RS485

- Single phase systems
- Rated current 40 A – 70°C
- Counters for active imported and exported energy
- 8 resettable counters, customized via the App



Toolbox



7M.38

NFC - Modbus RS485

- SThree phase systems with or without neutral or for single phase systems
- Rated current 80 A – 70°C
- Counters for active imported and exported energy
- 16 resettable counters, customized via the App

Approvals (according to type)



Energy meters ideal for remote monitoring and measurement of energy consumed in apartments, communal areas in apartment blocks, boilers, photovoltaic systems, machine tools, production lines and presses, etc...

7P SERIES Surge protection devices (SPD)

SPD, for single/three phase applications,
for protection of data lines.



7P Series
See the technical
data sheet

→ Class I + II SPD with varistor and GDT guarantees high isolation and zero leakage current (7P.04)

- Class I + II SPD, compact and efficient - effective protection starting from the point of delivery of energy
- Class I and Class II SPDs with replaceable module
- Class III SPDs for a wide range of applications such as LED lamps, sensitive electronics, data lines
- For panel or 35 mm rail (EN 60715) mount
- Equipped with replaceable modules with or without remote signalling contact
- Modular, from 18 to 144 mm wide



7P.04




7P.12



7P.23



7P.25



7P.36



7P.68



7P.62-RS485

Approvals (according to type)



The ideal overvoltage protection system consists of the connection of Class I, II and III SPDs. Providing protection from atmospheric (lightning) and switching overvoltage. Residential and service installations such as: apartments, saunas, TVs, dishwashers, computers, modems, etc... Industrial installations: elevators, motors, sensitive measurement and data transmission electronics. Photovoltaic systems: inverters, panels and control and measurement devices.

7P SERIES

Surge protection devices (SPD)

SPD Type 1+2 designed for charging stations.

For industrial, and residential and commercial applications, with or without a lightning rod.



7P Series
See the technical
data sheet

- **Compact size with no leakage current**
- **High discharge current up to 50 kA_{limp}**
- **For single and three phase systems (230/400 V)**

Each module has a combined high energy varistor block and a high-performance spark gap (GDT) that ensure:

- High discharge current
- High insulation resistance that eliminates leakage current
- No following current



7P.02.8.275.1012

SPD Type 1+2
for single phase TT (TN-S) systems



7P.04.8.275.1012

SPD Type 1+2
for three phase TT (TN-S) systems



7P.05.8.275.1012

SPD Type 1+2
for three phase TN systems

Approvals (according to type)



The ideal overvoltage protection system consists of the connection of Class I, II and III SPDs.
Providing protection from atmospheric (lightning) and switching overvoltage.
Residential and service installations such as: apartments, saunas, TVs, dishwashers, computers, modems, etc...
Industrial installations: elevators, motors, sensitive measurement and data transmission electronics.
Photovoltaic systems: inverters, panels and control and measurement devices.

7P SERIES Surge protection devices (SPD)

SPDs for Photovoltaic Applications.



7P Series
See the technical
data sheet

- Compact size with high total discharge current up to 12.5 kA.
- Upside down mounting solution
- Suitable up to 1500 V DC of U_{CPV}

SPD Type 1+2

parameters for each pole: - Y connection

- $I_{imp} = 6.25$ kA (single pole)
- $I_n = 20$ kA
- $I_{max} = 40$ kA



7P.13.9.000.1006
 $U_{CPV} = 1050$ V DC



7P.13.9.500.1006
 $U_{CPV} = 1500$ V DC

SPD Type 2

- $I_n = 20$ kA
- $I_{max} = 40$ kA

x = optional
remote
connector



7P.23.9.750.x020
 $U_{CPV} = 750$ V DC



7P.23.9.000.x015
 $U_{CPV} = 1020$ V DC



7P.23.9.500.x015
 $U_{CPV} = 1500$ V DC

Approvals (according to type)



SPD Type 1+2 and Type 2 for Photovoltaic Applications in compliance with the regulations in force.

78 SERIES

Industrial Switch Mode DC Power Supplies



The 78 Series offers a comprehensive range of certified, versatile solutions, engineered for everything from residential to high-demand industrial automation panels.



78 Series
See the technical
data sheet

- High efficiency
- Low stand-by power consumption
- DC output voltage adjustable
- Overvoltage protection: Varistor
- Short circuit protection with hiccup auto-recovery
- Parallel working for increased load current (with external diode) or redundancy
- Thermal protection with auto shutdown
- Box clamp
- 35 mm rail (EN 60715) mount



Single phase: compact and efficient

- High peak current up to 30%
- Boost current up to 30% for 3 s (depending on version)
- Compliant with IEC/EN 62368-1, UL 61010

→ Industrial Single phase Switch Mode DC Power Supplies: 75 W and 120 W

Type 78.J1 - 24 V DC, 3.2 A, 75 W output

Dimensions (w x h x d): 32.3 x 126.5 x 114.4 mm

Type 78.W1 - 24 V DC, 5 A, 120 W output

Dimensions (w x h x d): 40 x 126.4 x 126.9 mm



→ Industrial Single phase Switch Mode DC Power Supplies: 240 W and 480 W

Tipul 78.X1 - 24 V DC, 10 A, 240 W output

Dimensions (w x h x d): 63 x 128.7 x 126.8 mm

Tipul 78.Y1 - 24 V DC, 20 A, 480 W output

Dimensions (w x h x d): 85.5 x 128.7 x 142.1 mm

- Double stage with active PFC (Power Factor Correction)

Approvals (according to type)



Range of certified, versatile solutions, engineered for high-demand industrial automation panels.

78 SERIES

Industrial Switch Mode DC Power Supplies



Dual phase: wide input range for increased versatility

- Auxiliary contact: DC OK
 - High peak current up to 30%
 - Boost current up to 30% for 3 s (depending on version)
 - Compliant with EN 61010-1, UL 61010
- **Industrial Dual phase Switch Mode DC Power Supplies: 60 W and 120 W**
Type 78.H2 - 24 V DC, 2.5 A, 60 W output
 Dimensions (w x h x d): 32 x 126.5 x 114.1 mm



- Type 78.W2 - 24 V DC, 5 A, 120 W output**
 Dimensions (w x h x d): 40 x 125.2 x 127 mm
- **Industrial Dual phase Switch Mode DC Power Supplies: 240 W and 480 W**
Type 78.X2 - 24 V DC, 10 A, 240 W output
 Dimensions (w x h x d): 63.2 x 125.8 x 126.6 mm

- Type 78.Y2 - 24 V DC, 20 A, 480 W output**
 Dimensions (w x h x d): 85.7 x 130.3 x 141.8 mm
- Constant current output limiting circuit
 - Double stage with active PFC (Power Factor Correction)



Three phase: for high power applications

- **Industrial Three phase Switch Mode DC Power Supplies: 240 W to 960 W**
Type 78.X3 - 24 V DC, 10 A, 240 W output
 Dimensions (w x h x d): 63 x 127.6 x 126.7 mm

- Type 78.Y3 - 24 V DC, 20 A, 480 W output**
 Dimensions (w x h x d): 85.5 x 128.8 x 141.8 mm

- Type 78.Z3 - 24 V DC, 40 A, 960 W output**
 Dimensions (w x h x d): 110 x 136.9 x 162.4 mm
 Current sharing possibility up to 3840 W: 4 power supply

- Dual phase functioning possible
- Auxiliary contact: DC OK
- Constant current output limiting circuit
- Double stage with active PFC (Power Factor Correction)
- High peak current up to 30%
- Boost current up to 30% for 3 s (depending on version)
- Compliant with EN 61010-1, UL 61010



78 Series
See the technical data sheet

78 SERIES Switch mode power supplies

High-performance switch mode power supplies with adjustable output voltage and overvoltage and short circuit protection.

→ **High efficiency and reliability**

→ **Low stand-by power consumption**

- Compact size
- Front panel access for easy replacement of input fuse (according to type)
- Separate alert for thermal protection
- Compliant with EN 60950-1 and EN 61204-3



78 Series
See the technical data sheet



78.12



78.60



78.2E

Approvals (according to type)



Industrial applications: industrial automation, control and measurement systems.
Building applications: video door entry systems, pumps, DC motors, LED lighting, panels for interfacing BUS systems.



7T SERIES Panel Thermo-Hygrostat and Thermostats

Type 7T.51 - THERMO-HYGROSTAT

→ **Compact size, 17.5 mm**

→ **Electronic temperature control +10...+60°C and humidity control 50...90%**

- 1 normally open contact (10 A)
- Multi-function

Type 7T.81 - THERMOSTATS

→ **Compact size, 17.5 mm**

→ **Temperature setting 0...+60 °C, -20...+40 °C, -20...+60°C**

- 1 normally open contact (10 A) version for ventilation control
- 1 normally closed contact (10 A) version for heating control



7T Series
See the technical data sheet



7T.51



7T.81.0.000.230x



7T.81.0.000.240x

Approvals (according to type)



Ensuring the performance and longevity of components and instrumentation within control panels and enclosures. Control of ventilation fans or anti-condensation heaters, according to the temperature being above or below the set level.

In the case of the thermo-hygrostat, control is also dependent on the humidity within the panel.

7F SERIES Filter Fan (24...700)m³/h and Exhaust Filter



7F Series
See the technical
data sheet

- **Air flow from 24 to 700 m³/h**
- **Protection category IP 54 and NEMA Type 12 and Type 3R (7F.30)**
 - Nominal voltage 120 V AC, 230 V AC or 24 V DC (according to type)
 - Available for indoor (7F.20) or outdoor (7F.30) applications
 - Filter Fan supplied in Reverse flow mode (7F.21 and 7F.31)
 - Very low acoustic noise
 - Easily replaceable filter mat
 - Dimensions from 120 mm up to 320 mm
 - Push-in terminals
 - Colours available: Types 7F.20 - Grey RAL 7035 and Black RAL 9004
Types 7F.30 - Grey RAL 700



Approvals (according to type)



Filter fans with exhaust filters to help maintain constant temperature in control panels and enclosures and ensure long term performance of components.

7H SERIES

Panel heaters

25 - 50 - 100 - 150 - 250 - 400 W

→ **SAFE TOUCH plastic protection against accidental contact**

- Heaters: heating power 25 - 50 - 100 and 150 W
- Nominal voltage 110...230 V AC/DC
- Fan assisted heaters: heating power 250 and 400 W
- Nominal voltage 120 or 230 V AC



7H Series
See the technical data sheet



7H.51.0.230.0025



7H.51.0.230.0100



7H.51.8.230.0250

Approvals (according to type)



Used in control panels and enclosures to prevent the formation of condensation by keeping the interior above the dew point.

7L SERIES LED panel lights





7L Series
See the technical
data sheet

- **Versions with: direct switching, switching via ON/OFF switch and switching via movement detector**
- **Brightness levels: 600 or 1200 lumens**
- **Nominal power consumption: 6 W (600 lm), 9 W (1200 lm)**
- **Direct magnetic mounting or through a screw-fixed metallic support**
 - Power supply: 12...48 V AC/DC and 110...240 V AC/DC
 - Radiation angle: 120°
 - Colour temperature: 5,000 K
 - Protection category: IP 20
 - Push-in terminals for the onnection to a single unit
 - Plug-in terminals for the connection to a single or multiple units (up to max. 7 lamps)
 - Connector Type 07L.11 (included in the packaging)



Plastic fixing ring Type 07L.22
(not included in the packaging)

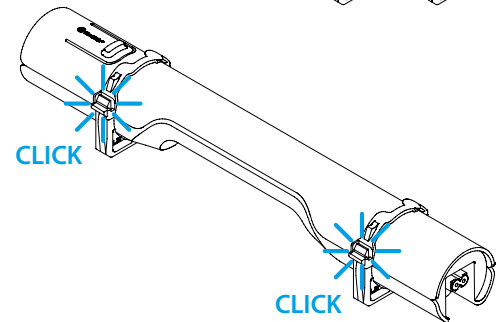

Approvals (according to type)



Used in electrical cabinets or technical compartments for powerful and versatile lighting.

7U SERIES Power outlets for electrical enclosures



7U Series
See the technical
data sheet

→ **Voltage indication LED version available**

- 45 mm wide
- Available in grey (RAL 7035) and yellow (RAL 1021) color (according to type)
- 35 mm rail (EN 60715) mount

Italian Bipasso - Type F and Type L 10/16 A
Nominal voltage: 250 V AC



7U.00.8.230.00x0



7U.00.8.230.00x2

French system - Type E 16 A
Nominal voltage: 250 V AC



7U.01.8.230.00x0



7U.01.8.230.00x2

North America - Type B 15 A
Nominal voltage: 125 V AC



7U.02.8.120.00x0

Approvals (according to type)



For a secure and approved power outlet for use within electrical enclosures.

9D SERIES High Current Terminal Blocks

- **Nominal current: 80, 125, 175, 250 or 400 A**
- **Daisy chain blocks for further expansion of output terminals**
 - Available with 7, 8 or 12 connections (according to type)
 - Cable connection capacity up to 185 mm² cross section
 - Screw terminals
 - 35 mm rail (EN 60715) mount



9D Series
See the technical data sheet



9D.01.5.080.0304



9D.01.5.125.0206



9D.01.5.175.0210



9D.01.5.250.0111



9D.01.5.400.0111

Approvals (according to type)



For the combining and distribution of high current power cables within electrical panels and cabinets.

80 SERIES Modular timer 1 - 6 - 8 - 16 A



80.01

Modular timers 17.5 mm. Multi-voltage, Multi-function and Mono-function.

- **Wide nominal voltage range of 12 to 240 V AC or DC (non-polarised)**
 - "PWM clever" technology for automatic recognition of the supply voltage
 - Rated current up to 16 A; a version with 1 A SSR output is also available
 - Six time scales from 0.1s to 24h
 - High input/output isolation
 - "Blade + cross" - both flat blade and cross head screwdrivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip



80 Series
See the technical
data sheet



Type 80.01.0.240.N000 - Modular Timer, with NFC

- **Multi-voltage**
- **Multi-functions**
- **Programmable via NFC**
 - 1 CO contact 16A
 - Nominal voltage 12...240V AC/DC
 - 7 functions available
 - 17,5 mm wide




Toolbox



Approvals (according to type)



Automatic door and gate openers, building automation, cranes, pump control panels and pumping units, automated awnings, blinds, shutters, elevators, control systems, timers and lighting controls.

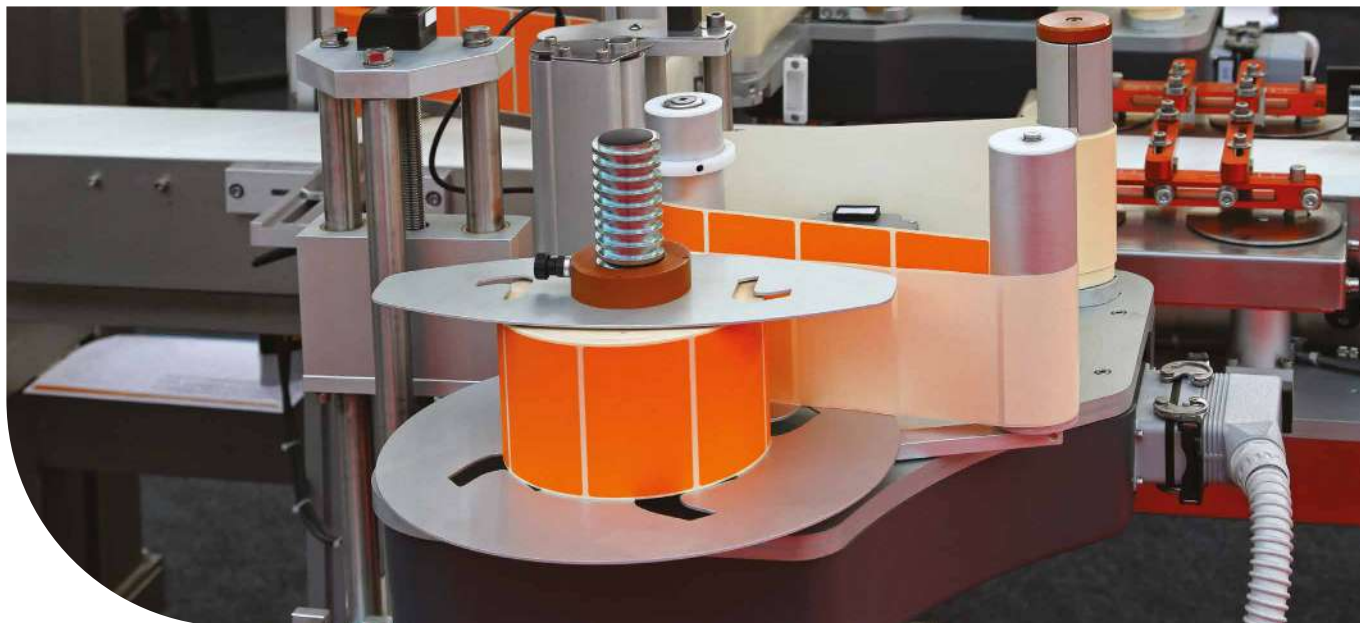

81 SERIES Modular timer 16 A

Multi-voltage Modular Timer 17.5 mm, with Start and Reset function.



→ Reset function

- Multi-function (7 functions, 4 with power-on start and 3 with Start and Reset control signal inputs)
- Wide nominal voltage range of 12 to 230 V AC or DC (non-polarised)
- DIP switch for time and function controls
- Six time scales from 0.1s to 10h



81 Series
See the technical data sheet

Approvals (according to type)



Automatic door and gate openers, shipyards, drills, cleaners, sanders, control panels, distribution, timers and lighting controls, milk-processing machines, control panels, industrial sweepers.

83 SERIES Modular timers 8 - 12 - 16 A

Modular timers 22.5 mm. Multi-function and Mono-function.



83.91

→ **Wide nominal voltage range of 24 to 240 V AC or DC (non-polarised). Rated current up to 16 A; special versions also available with 2 timed contacts or 1 timed + 1 instantaneous contact plus option to set delay time via an external potentiometer**

- Multi-function and Mono-function types available
- "PWM clever" technology for automatic recognition of the supply voltage
- Eight time scales from 0.05 s to 10 days
- High input/output isolation



Type 83.02.0.240.0003 - IECEx modular timer

→ **Multi-function & multi-voltage IECEx, ATEX (Zone 2, Category 3), HazLoc (CI I, Div.2) timer**

- 2 Pole (timed + instantaneous options)
- External time setting potentiometer option
- $U_n = 24 \dots 240 \text{ V AC/DC}$
- 2 changeover contacts, 277 V AC, 10 A
- ATEX: II 3 G Ex ec nC IIC T4 Gc
- IECEx: Ex ec nC IIC T4 Gc
- HazLoc: CI I, Div2, Gr A, B, C, D, T4, CI I, Zn 2, AEx ec nC IICT4, Ex ec nC IIC T4 Gc X



83 Series
See the technical
data sheet

Approvals (according to type)



Packaging machines, pump control panels and pumping units, industrial refrigeration, discotheques, swimming pools, and fountains, industrial furnaces and ovens, confectionery machines, control panels and distribution, automatic car-washes.

84 SERIES SMARTimer, digital timer 16 A



84 Series
See the technical
data sheet

- **Multi-function; (the two channels, and their respective selected function, can be combined to create a new and more complex function)**
- **Multi-voltage**
 - Two programming modes: "Smart" mode via smartphone with NFC communication or "Classic" mode via the joystick
 - Wide backlit display
 - High precision and flexibility, adjustable in tenths of a second, seconds, minutes, hours
 - 2 changeover contacts 16 A output



85 SERIES Miniature plug-in timers 7 - 10 A



- **Seven time scales, from 0.05 s to 100 h**
- **Multi-function**
 - AC/DC supply non polarized
 - 2, 3 or 4 changeover contacts
 - Wide ambient temperature range: -20...+60°C
 - 94 Series sockets mount



85 Series
See the technical data sheet

Approvals (according to type)



84 Series: Industrial washing machines, timers and lighting controls, discotheques, swimming pools, and fountains, industrial furnaces and ovens, confectionery machines, punches, cleaners, planers and sanders, control panels, automatic car-washes.

85 Series: Medical and dentistry, drying kilns, timers and lighting controls, elevators for workshops, galvanic treatment machines, panels for electrical distribution, control panels, industrial fans.

86 SERIES Timer modules



86.00



86.30

- **Option of functions with external start (Type 86.00)**
- **Special versions for hazardous locations (ATEX, HazLoc)**
 - Multi-function & multi-voltage
 - Wide supply voltage AC/DC range (non polarized)
 - Seven time scale: from 0.05 s to 100 h
 - LED indicator
 - Timer modules for use in conjunction with relay & socket



86 Series
See the technical data sheet



88 SERIES Plug-in timers 8 A



88 Series
See the technical data sheet

- **8 and 11 pin plug-in versions available for 90 Series socket mount**
- **Versions available: 2 timed contacts or 1 timed contact + 1 instantaneous contact**
 - Multi-voltage and multi-function
 - Time scales from 0.05 s to 100 h
 - Wide supply voltage AC/DC range



88.02



88.92

Approvals (according to type)



86 Series: Machines for paper processing, printing machines, machines for ceramics, packaging machines, wood processing machines, milk-processing machines, textile machines, control panels.
88 Series: Medical and dentistry, drying kilns, industrial furnaces and ovens, ultrasonic cleaning machines, industrial washing machines, confectionery machines, wood-processing machines, galvanic treatment plants.

Socket-Timer compatibility




85 SERIES - Miniature plug-in timers

Compatible with 94 Series sockets



88 SERIES - Plug-in timers

Compatible with 90 Series sockets

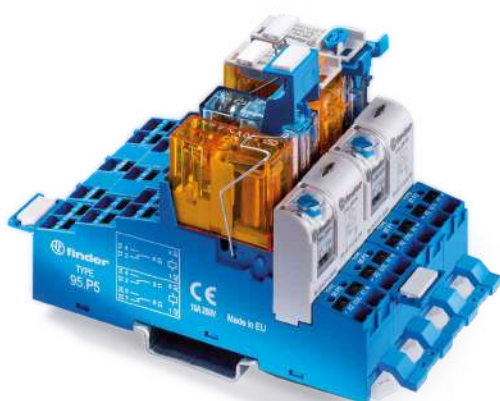

86 SERIES - Timer modules

Type 86.00

compatible with the following socket type:

- 90.02, 90.03
- 92.03
- 96.04

Type 86.30

compatible with the following socket type:

- 90.02, 90.03
- 92.03
- 96.02, 96.04
- 94.02, 94.03, 94.04, 94.54, 94.P3, 94.P4
- 97.01, 97.02, 97.51, 97.52, 97.P1, 97.P2
- 95.03, 95.05, 95.55, 95.P3, 95.P5



39 SERIES

Slim timed interface module

- 39.81 - **EMR**
Timed socket with box clamp
- 39.80 - **SSR**
Timed socket with box clamp
- 39.91 - **EMR**
Timed socket with push-in terminals
- 39.90 - **SSR**
Timed socket with push-in terminals

findernet.com

FINDER S.p.A. sole proprietorship

Via Drubiaglio, 14 - 10040 ALMESE (TO) ITALY

tel +39 011 9346211

export@findernet.com

Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice.
FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document.
In case of discrepancies between the printed and online versions, the latter prevails.

ZGUENXXINDS - III/2026 - SOLUTIONS FOR ELECTRICAL PANELS AND INDUSTRIAL AUTOMATION

