



SIRIUS soft starter 200-600 V 32 A, 24 V AC/DC spring-type terminals

product brand name

product category

product designation

product type designation

manufacturer's article number

- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFINET high-feature usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of circuit breaker usable at 400 V at inside-delta circuit
- of circuit breaker usable at 500 V at inside-delta circuit
- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

SIRIUS

Hybrid switching devices

Soft starter

3RW55

[3RW5980-0HF00](#)

[3RW5980-0CS00](#)

[3RW5950-0CH00](#)

[3RW5980-0CP00](#)

[3RW5980-0CT00](#)

[3RW5980-0CR00](#)

[3RW5980-0CE00](#)

[3RV2032-4VA10; Type of coordination 1, Iq = 65 kA, CLASS 10](#)

[3RV2032-4VA10; Type of coordination 1, Iq = 10 kA, CLASS 10](#)

[3RV2032-4JA10; Type of coordination 1, Iq = 65 kA, CLASS 10](#)

[3RV2032-4JA10; Type of coordination 1, Iq = 10 kA, CLASS 10](#)

[3NA3824-6; Type of coordination 1, Iq = 65 kA](#)

[3NA3824-6; Type of coordination 1, Iq = 65 kA](#)

[3NE1818-0; Type of coordination 2, Iq = 65 kA](#)

[3NE8022-1; Type of coordination 2, Iq = 65 kA](#)

General technical data

starting voltage [%]

20 ... 100 %

stopping voltage [%]

50 %; non-adjustable

start-up ramp time of soft starter

0 ... 360 s

ramp-down time of soft starter

0 ... 360 s

start torque [%]

10 ... 100 %

stopping torque [%]

10 ... 100 %

torque limitation [%]

20 ... 200 %

current limiting value [%] adjustable

125 ... 800 %

breakaway voltage [%] adjustable

40 ... 100 %

breakaway time adjustable

0 ... 2 s

number of parameter sets

3

accuracy class according to IEC 61557-12

5 %

certificate of suitability

- CE marking
- UL approval

Yes

Yes

• condition monitoring	Yes
• automatic parameterisation	Yes
• application wizards	Yes
• alternative run-down	Yes
• emergency operation mode	Yes
• reversing operation	Yes
• soft starting at heavy starting conditions	Yes

Power Electronics

operational current

• at 40 °C rated value	32 A
• at 40 °C rated value minimum	6.5 A
• at 50 °C rated value	28.4 A
• at 60 °C rated value	26 A

operational current at inside-delta circuit

• at 40 °C rated value	55.4 A
• at 50 °C rated value	49 A
• at 60 °C rated value	45 A

operating voltage

• rated value	200 ... 600 V
• at inside-delta circuit rated value	200 ... 600 V

relative negative tolerance of the operating voltage

-15 %

relative positive tolerance of the operating voltage

10 %

relative negative tolerance of the operating voltage at inside-delta circuit

-15 %

relative positive tolerance of the operating voltage at inside-delta circuit

10 %

operating power for 3-phase motors

• at 230 V at 40 °C rated value	7.5 kW
• at 230 V at inside-delta circuit at 40 °C rated value	15 kW
• at 400 V at 40 °C rated value	15 kW
• at 400 V at inside-delta circuit at 40 °C rated value	22 kW
• at 500 V at 40 °C rated value	18.5 kW
• at 500 V at inside-delta circuit at 40 °C rated value	30 kW

Operating frequency 1 rated value

50 Hz

Operating frequency 2 rated value

60 Hz

relative negative tolerance of the operating frequency

-10 %

relative positive tolerance of the operating frequency

10 %

minimum load [%]

10 %; Relative to set I_e

power loss [W] for rated value of the current at AC

• at 40 °C after startup	10 W
• at 50 °C after startup	9 W
• at 60 °C after startup	8 W

power loss [W] at AC at current limitation 350 %

• at 40 °C during startup	519 W
• at 50 °C during startup	437 W
• at 60 °C during startup	386 W

type of the motor protection

Electronic, tripping in the event of thermal overload of the motor

Control circuit/ Control

type of voltage of the control supply voltage

AC/DC

control supply voltage at AC

• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V

relative negative tolerance of the control supply voltage at AC at 50 Hz

-20 %

relative positive tolerance of the control supply voltage at AC at 50 Hz

20 %

relative negative tolerance of the control supply voltage at AC at 60 Hz

-20 %

relative positive tolerance of the control supply voltage at AC at 60 Hz

20 %

control supply voltage frequency

50 ... 60 Hz

relative negative tolerance of the control supply voltage frequency

-10 %

relative positive tolerance of the control supply voltage frequency

10 %

control supply voltage	
• at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	420 mA
holding current in bypass operation rated value	820 mA
locked-rotor current at close of bypass contact maximum	0.91 A
inrush current peak at application of control supply voltage maximum	7.5 A
duration of inrush current peak at application of control supply voltage	20 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply

Inputs/ Outputs

number of digital inputs	4
• parameterizable	4
• number of digital outputs	4
• number of digital outputs parameterizable	3
• number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A

Installation/ mounting/ dimensions

mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	275 mm
width	170 mm
depth	152 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
weight without packaging	2.6 kg

Connections/ Terminals

type of electrical connection	
• for main current circuit	screw-type terminals
• for control circuit	spring-loaded terminals
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.0 ... 2.5 mm²), 2x (2.5 ... 10 mm²)
— finely stranded with core end processing	2x (1.0 ... 2.5 mm²), 2x (2.5 ... 6.0 mm²)
• at AWG cables for main current circuit solid	2x (16 ... 12), 2x (14 ... 8)
type of connectable conductor cross-sections	
• for control circuit solid	2x (0.25 ... 1.5 mm²)
• for control circuit finely stranded with core end processing	2x (0.25 ... 1.5 mm²)
• at AWG cables for control circuit solid	2x (24 ... 16)
• at AWG cables for control circuit finely stranded with core end processing	2x (24 ... 16)
wire length	
• between soft starter and motor maximum	800 m
• at the digital inputs at DC maximum	1 000 m

Ambient conditions

installation altitude at height above sea level maximum

5 000 m; Derating as of 1000 m, see catalog

ambient temperature

- during operation

-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above

- during storage and transport

-25 ... +80 °C

environmental category

- during operation according to IEC 60721

3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6

- during storage according to IEC 60721

1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4

- during transport according to IEC 60721

2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)

EMC emitted interference

acc. to IEC 60947-4-2: Class A

Communication/ Protocol**communication module is supported**

- PROFINET standard
- PROFINET high-feature
- EtherNet/IP
- Modbus RTU
- Modbus TCP
- PROFIBUS

Yes

No

No

No

Yes

Yes

UL/CSA ratings**manufacturer's article number**

- of circuit breaker

- usable for Standard Faults at 460/480 V according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA

- usable for High Faults at 460/480 V according to UL

Siemens type: 3RV2742, max. 40 A or 3VA51, max. 60 A; Iq max = 65 kA

- usable for Standard Faults at 460/480 V at inside-delta circuit according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA

- usable for High Faults at 460/480 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 60 A; Iq max = 65 kA

- usable for Standard Faults at 575/600 V according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA

- usable for High Faults at 575/600 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 60 A; Iq max = 65 kA

- usable for Standard Faults at 575/600 V at inside-delta circuit according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA

- of the fuse

- usable for Standard Faults up to 575/600 V according to UL

Type: Class RK5 / K5, max. 125 A; Iq = 5 kA

- usable for High Faults up to 575/600 V according to UL

Type: Class J / L, max. 125 A; Iq = 100 kA

- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class RK5 / K5, max. 125 A; Iq = 5 kA

- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class J / L, max. 125 A; Iq = 100 kA

operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value

7.5 hp

- at 220/230 V at 50 °C rated value

10 hp

- at 460/480 V at 50 °C rated value

20 hp

- at 575/600 V at 50 °C rated value

25 hp

- at 200/208 V at inside-delta circuit at 50 °C rated value

15 hp

- at 220/230 V at inside-delta circuit at 50 °C rated value

15 hp

- at 460/480 V at inside-delta circuit at 50 °C rated value

30 hp

- at 575/600 V at inside-delta circuit at 50 °C rated value

40 hp

contact rating of auxiliary contacts according to UL

R300-B300

Safety related data**protection class IP on the front according to IEC 60529**

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

electromagnetic compatibility

acc. to IEC 60947-4-2

ATEX

certificate of suitability

- ATEX
- IECEx
- according to ATEX directive 2014/34/EU

type of protection according to ATEX directive 2014/34/EU

hardware fault tolerance according to IEC 61508 relating to ATEX

Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX

Yes

Yes

BVS 18 ATEX F 003 X

II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]

0

SIL1

Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)



Marine / Shipping

other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5516-3HA05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5516-3HA05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-3HA05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5516-3HA05&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-3HA05/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5516-3HA05&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

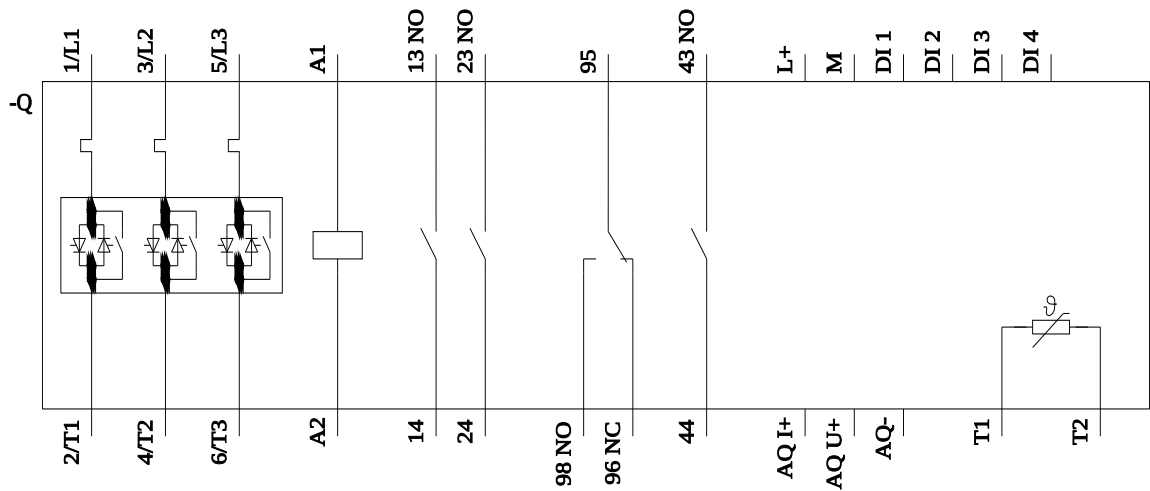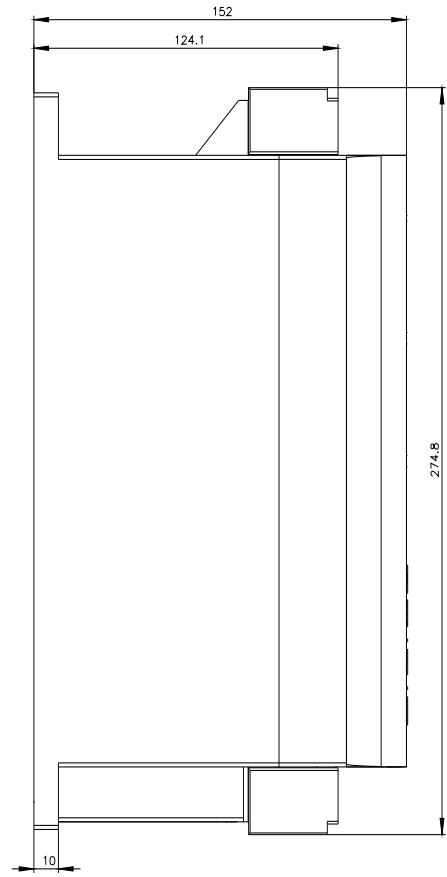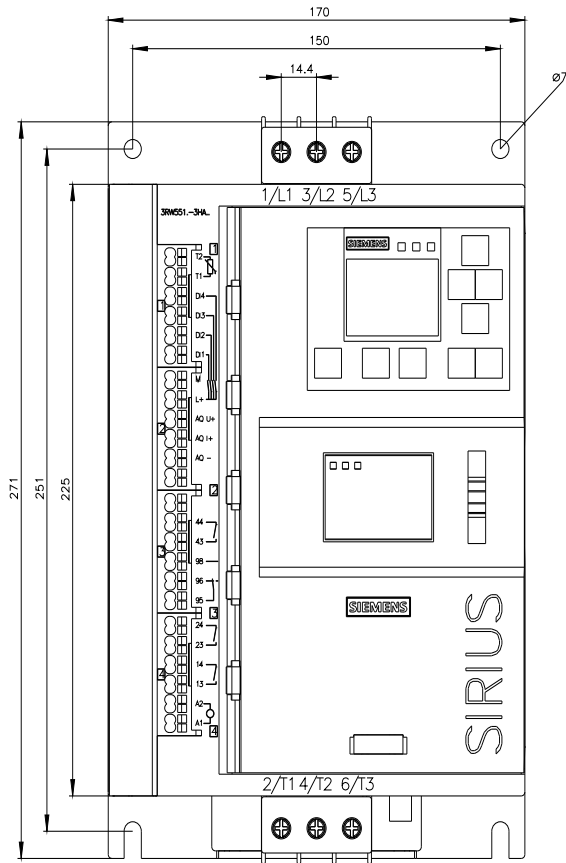

last modified:

9/12/2022 