



Sample image

LATERAL AUXILIARY CONTACTS

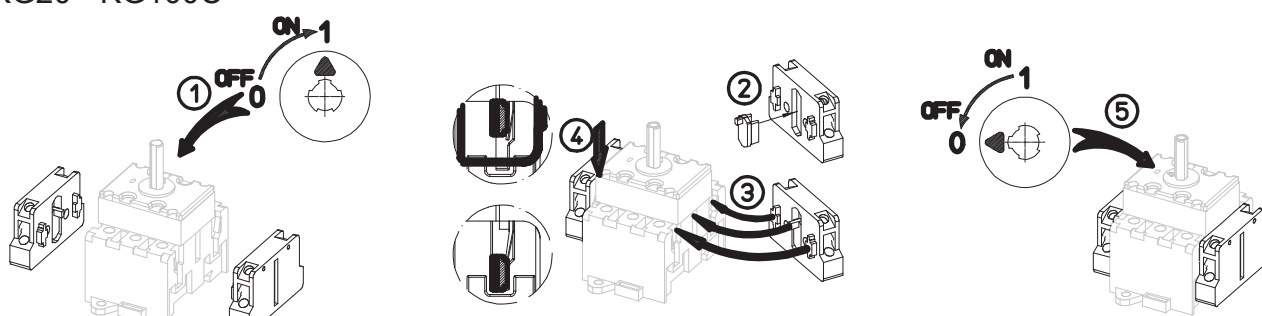
for KG20 - KG317 and KH(R)16 - KH(R)25B

Designation: K1.H010/A11-VE

Kind of contact operation: "A" not overlapping

Contact combination: "11" 1 NO + 1 NC

Type of mounting: "-VE" for type of mounting VE

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
		Voltage (V) AC / DC			
		690 AC			
UL60947-4-1 , UL508					
Nominal Voltage					
		Voltage (V) AC / DC			
		600 AC			
Rated insulation voltage Ui					
		Voltage (V) AC / DC			
		600 AC			
Rated thermal current					
		Current (A)	Ambient temperature (°C)		Additional Text
		10	0 - 40		-
Pilot duty rating code					
Duty Code					
A600					
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	10	1	1	1
General Information					
Text					
- Use copper wire only. Do not coat the wire end with tin.					
CSA					
Temp. rating of wire					
		Temperature rating (°C)	Current (A)		Text
		75			- only
GENERAL TECHNICAL INFORMATION					
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	2		2.5mm²	Copper
flexible wire	Max.	2		AWG 14	Copper
Single-core or stranded wire	Max.	2		AWG 12	Copper
Single-core or stranded wire	Max.	2		2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2		2.5mm²	Copper
Stripping length					
		Length (mm) -			
		8			
Recommended screw driver					
Type of screw driver		Value			
Cross Screwdriver		PH1			
Slot screwdriver according to DIN 5264		0,8x4			
KG20 - KG100C					
					
31	43				
32	44				