



Sample image

LATERAL AUXILIARY CONTACTS

for KG20 - KG317 and KH(R)16 - KH(R)25B

Designation: K1.H010/A11-VE

Kind of contact operation: "A" not overlapping

Contact combination: "11" 1 NO + 1 NC

Type of mounting: "-VE" for type of mounting VE

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Tension assignée d'isolement Ui

Tension (V) AC / DC
690 AC

UL60947-4-1, UL508

Nominal Voltage

Tension (V) AC / DC
600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC
600 AC

Rated thermal current

Intensité (A) Température Ambiante (°) Additional Text
10 0 - 40 -

Pilot duty rating code

Duty Code

A600

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	600	10	1	1	1

General Information

Text

- Use copper wire only. Do not coat the wire end with tin.

CSA

Temp. rating of wire

Temperature rating (°C) Intensité (A) Text
75 - only

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	2	2,5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper

Stripping length

Length (mm) -



Recommandations concernant le tournevis

Type

Tournevis cruciforme


Slot screwdriver according to DIN 5264

Value

PH1

0,8x4

KG20 - KG100C

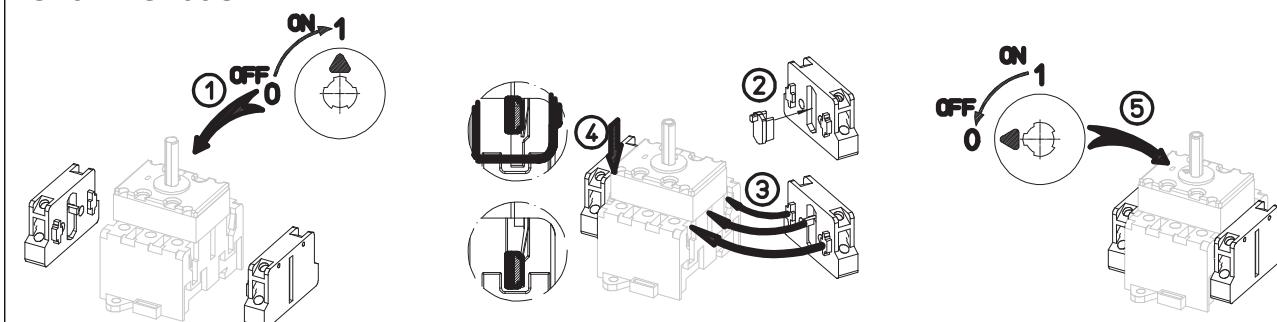

31 43

32 44

31 43

32 44