



Sample image

Datasheet

Article number: 70002446
Designation: CA10.A220.EF
Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
690 AC / DC						
Tension assignée de tenue aux chocs Uimp						
Tension (KV)	Classe de protection surcharges	Degré de pollution	Type d'alimentation	Fonction		
4 III		3	Valable pour un réseau triphasé avec le neutre à la terre	Switch disconnector		
Courant ininterrompu et thermique conventionnel Iu/Ith						
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire			
20	55	60	Température ambiante +55°C durant 24 heures avec point à +60°C			
Courant assigné d'emploi Ie						
Catégorie d'emploi			Tension (V)	Intensité (A)		
AC-15			220 - 240	6		
AC-15			380 - 440	4		
Puissance assignée d'emploi						
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)		
AC-3	220 - 240	3	3	3		
AC-3	380 - 440	3	3	5,50		
AC-3	660 - 690	3	3	5,50		
AC-3	220 - 240	1	2	2,20		
AC-3	380 - 440	1	2	3		
AC-23A	220 - 240	3	3	3,70		
AC-23A	380 - 440	3	3	7,50		
AC-23A	660 - 690	3	3	7,50		
AC-23A	220 - 240	1	2	2,50		
AC-23A	380 - 440	1	2	3,70		
Protection par fusible (IEC)						
Caractéri			Nombre de fusible	Intensité (A)		
gG			1	25		
UL60947-4-1 , UL508						
Nominal Voltage						
Tension (V) AC / DC						
300 AC / DC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
300 AC						
Rated thermal current						
Intensité (A)		Température Ambiante (°) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
Reversing		110 - 120	1	2	0,17	40
Reversing		220 - 240	1	2	0,50	40
Reversing		277 - 277	1	2	0,60	40
Reversing		110 - 120	3	3	0,50	40
Reversing		220 - 240	3	3	1	40
DOL		110 - 120	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	2	40
DOL		110 - 120	3	3	1,50	40
DOL		220 - 240	3	3	3	40
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)		Intensité (A) Text				
60 - 75		-- Use copper wire only				

Connecting instructions						
Markings						
When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
CSA						
Nominal Voltage						
			Tension (V) AC / DC			
			300 AC			
Tension assignée d'isolement Ui						
			Tension (V) AC / DC			
			300 AC			
Rated thermal current						
		Intensité (A)	Température Ambiante (°)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Tension (V)	Nb de phases	Nb de pôles
DOL				110 - 120	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
						Power (HP)
						0,50
						1
						2
						1,50
						3
						Ambient temperature [°C]
						40
						40
						40
						40
						40
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
			Temperature rating (°C)		Intensité (A) Text	
			75		-- only	
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,60		5	
Stripping length						
			Length (mm) --			
			8 STRIPPINGLENGTH			
Size of conductor						
composition of conductor		Min. / Max. value		No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)
solid wire		Min.		1		0,5mm²
solid wire		Min.		2		0,5mm²
flexible wire		Min.		1		0,75mm²
flexible wire		Min.		2		0,75mm²
flexible wire		Max.		2		2,5mm²
flexible wire		Max.		2		AWG 14
Single-core or stranded wire		Max.		2		AWG 12
Single-core or stranded wire		Max.		2		2,5mm²
flexible wire with ferrule according to DIN 46228		Min.		1		0,5mm²
flexible wire with ferrule according to DIN 46228		Max.		2		2,5mm²
flexible wire with ferrule according to DIN 46228		Min.		2		0,5mm²
						Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommandations concernant le tournevis						
Type			Value			
Tournevis cruciforme			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
General Information						
Text						
- Ne jamais lubrifier ou traiter les contacts.						
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.						

General Information

Text

- Use copper wire only. Do not coat the wire end with tin.

- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.

- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-EF

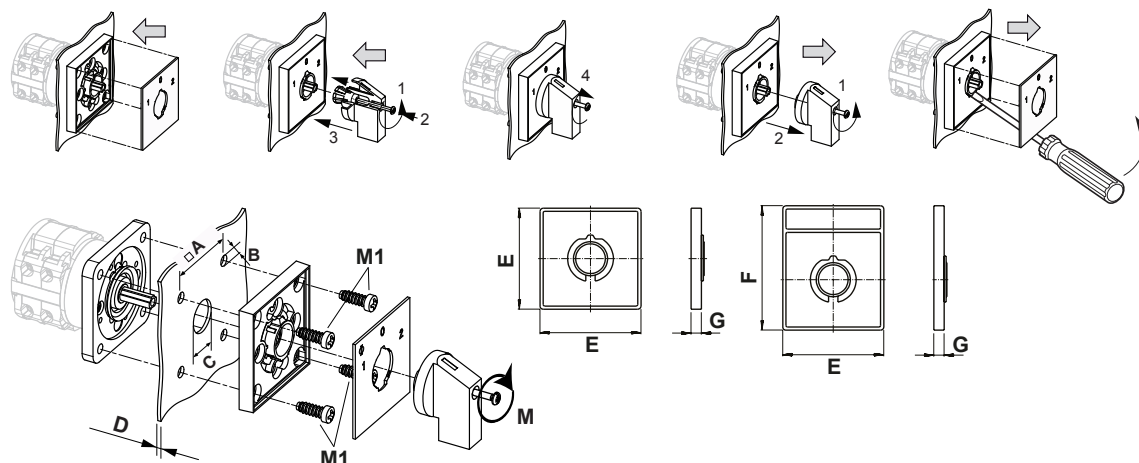

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	□	36,00 mm
B	∅	5,00 mm
C	∅	15,00 - 19,00 mm
D	H	<= 4,00 mm
E	H	48,00 mm
F	H	59,00 mm
G	H	6,70 mm
M	↺	0,50 Nm
M1	↺	0,90 Nm

Wiring diagram

CA10.A220.EF





Switch program

CA10.A220.EF



Kraus & Naimer


CA10
A220
Page 1 of 1

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle 60 Total switching Angle 60		2	4	6	8	10	12	14	16	18	20	22	24
1	330												
	345												
	0												
	15												
2	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												
	270												
	285												
	300												
	315												

Version: 106

Face plate

S0.F072/A1B.PEL

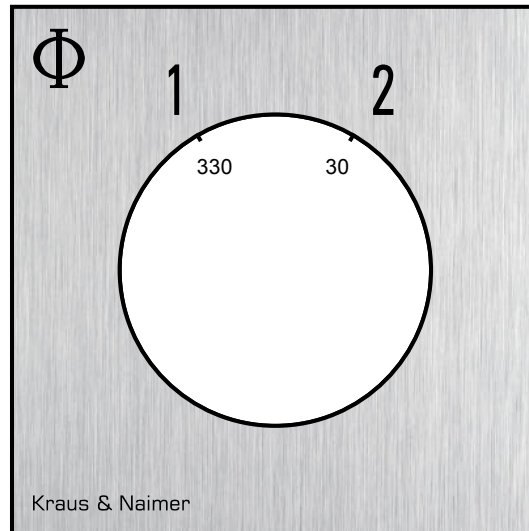

HANDLES

Designation: S0C.G251

Handle colour: "1" black

