




NEW DV MOD TNS 255 (956 040)

- High discharge capacity due to powerful RAC spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button
- The plug-in protection module can be replaced without switching off the mains voltage and without removing the distribution board cover

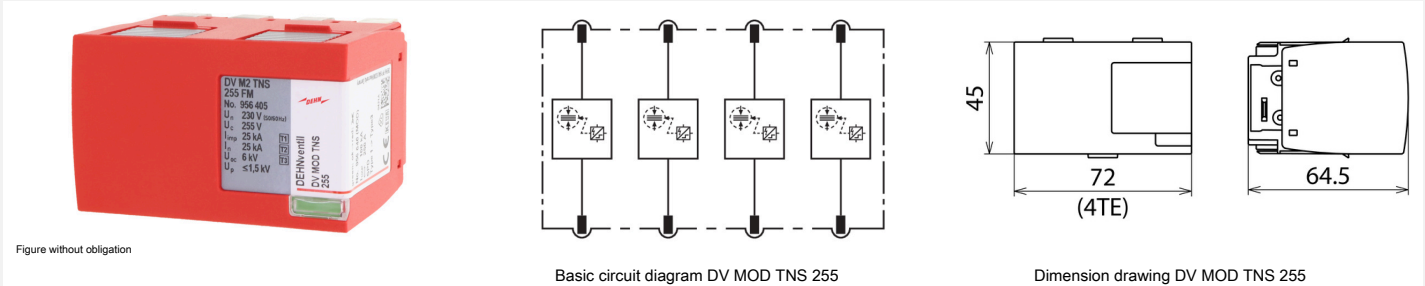

RAC spark-gap-based protection module

Type	DV MOD TNS 255
Part No.	956 040
Max. continuous operating voltage (a.c.) (U _c)	255 V
Lightning impulse current (10/350 μs) (I _{imp})	25 / 75 kA
Specific energy (W/R)	156.25 kJ/ohms
Follow current extinguishing capability [L-N] (a.c.) (I _{fi})	50 kA _{rms}
Follow current limitation / Selectivity	No tripping of a 32 A gG fuse up to 50 kA _{rms} (prosp.)
Short-circuit current rating [L-N]/[N-PE] (I _{SCCR})	50 kA _{rms}
Weight	294 g
Customs tariff number (Comb. Nomenclature EU)	85363090
GTIN	4013364510593
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.