


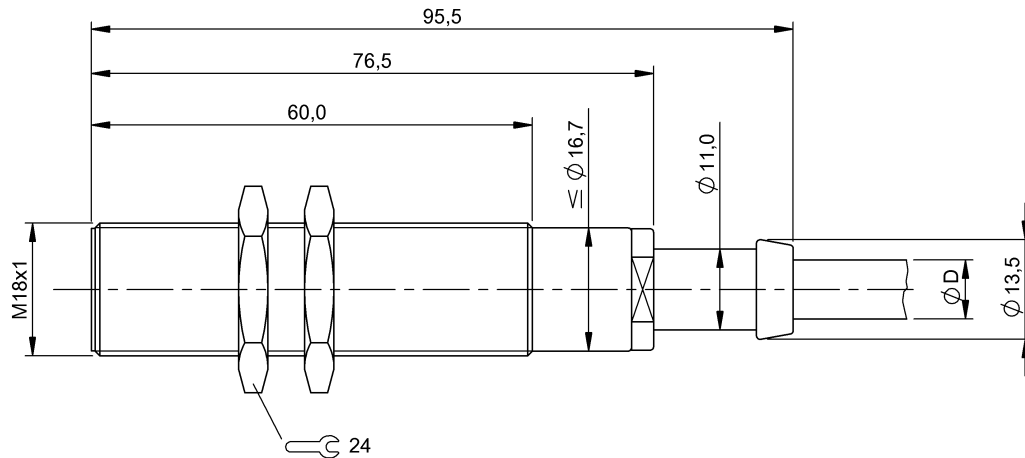

Basic features

Approval/Conformity	CE EAC WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	no
Power indicator	no

Electrical connection

Cable diameter D	8.00 mm
Cable length L	5 m
Conductor cross-section	0.75 mm ²
Connection type	Cable, 5.00 m, Silicone
Number of conductors	4
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	no

Electrical data

Load capacitance max. at U _e	1 µF
Min. operating current I _m	0 mA
No-load current I _o max., damped	20 mA
No-load current I _o max., undamped	20 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	10.0 kOhm + D/10.0 kOhm + D
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	400 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	10 ms
Residual current I _r max.	100 µA
Ripple max. (% of U _e)	15 %
Switching frequency	500 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-25...120 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
Protection degree	IP67 at the sensing surface

Functional safety

MTTF (40 °C)	1255 a
--------------	--------

Inductive Sensors
BES 516-105-SA2-05
Order Code: BES02H5

BALLUFF

Material

Housing material	Brass
Material jacket	Silicone
Material sensing surface	PBT
Surface protection	nickel plated

Mechanical data

Dimension	Ø 18 x 95.5 mm
Installation	for flush mounting
Size	M18x1
Tightening torque	25 Nm

Output/Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Range/Distance


Assured operating distance Sa	4 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	5 mm
Real switching distance sr	5 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

Ta ≥ 70 °C... ≤ 120 °C: Ie ≤ 150 mA.
Recommendation: After a short circuit check the device for proper function.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



1) For SCP see electrical data